



# Public Works Department

## Project Start Notification

### Three Island Blvd, Parkview Dr & Leslie Dr WM Improvements

#### Project Schedule

Construction Start Date  
**November 03, 2025**

Construction Completion Date  
**April 07, 2027**

#### Project Contact Information:

**Contractor**  
Man-Con Incorporated  
Luke Mancini  
Phone: 954-427-0230  
[Project@Mancon.ws](mailto:Project@Mancon.ws)

**City of Hallandale Beach**  
Public Works Dept.  
Jesus Padron  
Project Manager  
Phone: 954-457-1397  
[jpadron@cohb.org](mailto:jpadron@cohb.org)

Follow Us



[www.cohb.org/projects](http://www.cohb.org/projects)

[Report a Concern via our MyHB App](#)


**BACKGROUND:** The City of Hallandale Beach owns, operates and maintains a wastewater collection and transmission system including lift stations, monitoring systems, gravity sewers and force mains. Wastewater is collected primarily from residential and commercial connections and pumped to the City of Hollywood's Southern Regional Wastewater Treatment Plant for treatment and disposal.

In an effort to most effectively fulfill its responsibilities, provide a high level of service to its residents and customers, accommodate growth and economic development, and protect public health, safety, and the environment, the City developed a Wastewater Master Plan in 2017. The Master Plan considered factors such as population growth, new development, aging of existing infrastructure, and new regulatory requirements. Based on recommendations of the Master Plan, the City has embarked on a program to address capacity and aging infrastructure issues of the existing transmission system. This includes upgrades at various lift stations as well as improvements to the force main network.

**SCOPE OF WORK:** The work under this contract includes furnishing all labor, equipment, and materials necessary to install approximately 9,600 linear feet of new water main. The project scope includes, but is not limited to, installation of the new utility, connection to the existing City water main system, replacement of water services and fire lines, installation of fire hydrants, isolation and air release valves, utility testing, abandonment of existing water mains, maintenance of traffic, and complete roadway and site restoration, along with all associated appurtenances required for a fully functional water main system.

**PROJECT STATUS UPDATE:** The construction phase of the project is scheduled to commence on November 03, 2025 and completed by April 07, 2027.

#### PROJECT LOCATION:

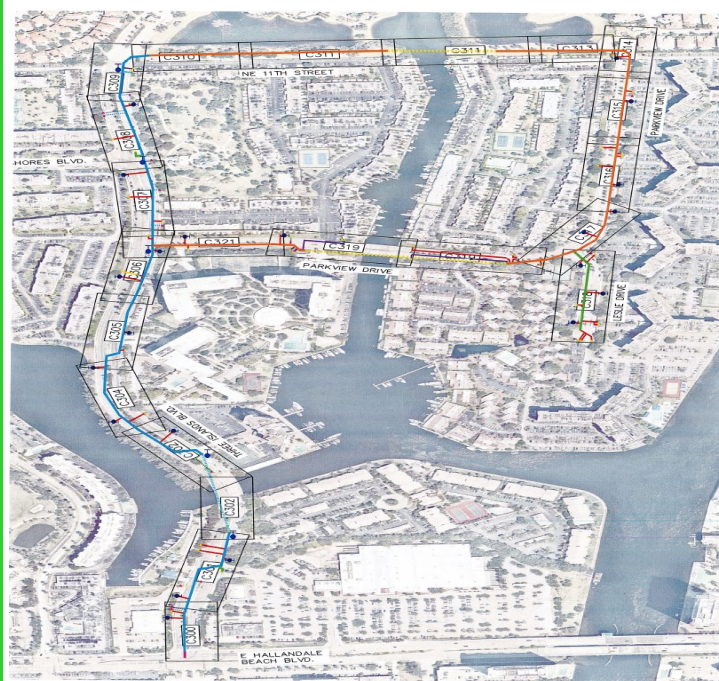

#### Main Services

- 12" PVC PIPE-650 FT
- 14" PVC PIPE-25 FT
- 16" PVC PIPE-3500 FT
- 16" DIPS DR 11 HDPE-1086-F
- 20" PVC PIPE-3800 FT
- 20" DIPS DR 9 HDPE-560 FT

#### Service Piping

- 3" DIP PIPE-70 FT
- 4" DIP PIPE-170 FT
- 6" DIP PIPE-1050 FT
- 8" DIP PIPE-600 FT
- Connect to WM
- Fire Hydrant
- Water Service Connection
- 20" Gate Valve

#### Water Services

- 1" Water Services
- 1.5" Water Services
- 2" Water Services
- UNK Size Water Service
- 2" Irrigation Services