
PLANNING DIV	File No. (internal use only): GENERAL APPLICATION GENERAL APPLICATION
	APPLICATION TYPE (CHECK ONE):
	 Technical Advisory Committee City Commission Date of Application: 01/23/2023
Tel: (954) 921-3471	Location Address: 2202-2204 Van Buren Street
Fax: (954) 921-3347	Location Address: 2202-2204 Van Buren Street Lot(s): 22 Block(s): 5 Subdivision: Hollywood Little Ranches Folio Number(s): 5142-16-01-2700 Zoning Classification: DH-2 Land Use Classification: R.A.C. Existing Property Use: Multi-family Sq Ft/Number of Units: 20,501 / 5
	Folio Number(s): 5142-16-01-2700
	Zoning Classification: DH-2 Land Use Classification: R.A.C.
This application must be completed <u>in full</u> and	Existing Property Use: Multi-family Sq Ft/Number of Units: 20,50175
submitted with all documents to be placed on a Board or	Is the request the result of a violation notice? () Yes (x) No If yes, attach a copy of violation. Has this property been presented to the City before? If yes, check al that apply and provide File Number(s) and Resolution(s):
The applicant is responsible for obtaining the appropriate checklist for each type of application.	Economic Roundtable Technical Advisory Committee Historic Preservation Board City Commission Planning and Development Explanation of Request:
Applicant(s) or their	
authorized legal agent must be	Number of units/rooms: <u>42</u> Sq Ft: <u>33,000 s.f.</u>
present at all Board or Committee meetings.	Value of Improvement: \$6,000,000 Estimated Date of Completion: 12/2024
	Will Project be Phased? () Yes (_x)No If Phased, Estimated Completion of Each Phase
At least one set of the submitted plans for each	
application must be signed	Name of Current Property Owner: Van Buren Flats LLC
and sealed (i.e. Architect or Engineer).	Address of Property Owner: 541 Avellino Isles Cir#30201 Naples, FL 34119
	Telephone: <u>347-255-9904</u> Fax: Email Address: <u>baruch.vardi@gmail.com</u>
Documents and forms can be	Name of Consultant/Representative/Tenant (circle one): Luis La Rosa
accessed on the City's website at	Address: 9000 Sheridan Street Suite 158 Telephone: 786-543-0851 Fax: Email Address: Ilarosa@larosaarchitects.com
http://www.hollywoodfl.org/Do	Date of Purchase: $12/1/2022$ Is there an option to purchase the Property? Yes () No ($_X$)
cumentCenter/Home/View/21	If Yes, Attach Copy of the Contract.
	List Anyone Else Who Should Receive Notice of the Hearing: Ido Vardi
đề	Address: Email Address: vardi.ido94@gmail.com
	Email Address: vald.idos4@gmail.com

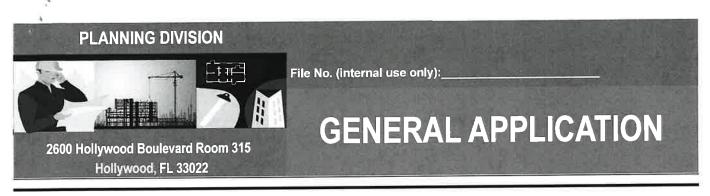

CERTIFICATION OF COMPLIANCE WITH APPLICABLE REGULATIONS

The applicant/owner(s) signature certifies that he/she has been made aware of the criteria, regulations and guidelines applicable to the request. This information can be obtained in Room 315 of City Hall or on our website at www.hollywoodfl.org. The owner(s) further certifies that when required by applicable law, including but not limited to the City's Zoning and Land Development Regulations, they will post the site with a sign provided by the Office of Planning and Development Services. The owner(s) will photograph the sign the day of posting and submit photographs to the Office of Planning and Development Services as required by applicable law. Failure to post the sign will result in violation of State and Municipal Notification Requirements and Laws.

(I)(We) certify that (I) (we) understand and will comply with the provisions and regulations of the City's Zoning and Land Development Regulations, Design Guidelines, Design Guidelines for Historic Properties and City's Comprehensive Plan as they apply to this project. (I)(We) further certify that the above statements and drawings made on any paper or plans submitted herewith are true to the best of (my)(our) knowledge. (I)(We) understand that the application and attachments become part of the official public records of the City and are not returnable.

Signature of Current Owner:	Date: 1/23/2028
PRINT NAME: Banch Vardi A	Date:
Signature of Consultant/Representative:	Date:
PRINT NAME: LVIS LA ROSA	Date: 1/23/2023
Signature of Tenant:	Date:
	Date:
Current Owner Power of Attorney	
I am the current owner of the described real property and that I am aware of to my property, which is hereby ma	de by me or I am hereby authorizing
Sworn to and subscribed before me this 23 day of Jamma 2023	Signature of Current Owner
M	Print Name
State of Florida	
My Commission Expires:(Check One)Personally known to me; OR Pr	oduced Identification



March 6, 2023

Van Buren Flats LLC 541 Avellino Isles Cir, # 30201 Naples, FL 34119

FILE NUMBER: 23-DP-08

SUBJECT: Preliminary Site Plan review for a 42 Unit residential development.

SITE DATA

Owner/Applicant: Address/Location:	Van Buren Flats LLC 2202-2204 Van Buren Street
Net Size of Property:	20,492 sq. ft. (0.47 acres)
Land Use:	Regional Activity Center (RAC)
Zoning:	Dixie Highway Medium Intensity Multi-Family
	District (DH-2)
Present Use of Land:	Residential
Year Built:	1949 (Broward County Property Appraiser)

ADJACENT LAND USE

North:	Regional Activity Center (RAC)
South:	Regional Activity Center (RAC)
East:	Regional Activity Center (RAC)
West:	Regional Activity Center (RAC)

ADJACENT ZONING

North:	Transitional Core District (TC-1)
South:	Dixie Highway Medium Intensity Multi-Family
	District (DH-2)
East:	Planned Development District (PD)
West:	Dixie Highway Medium Intensity Multi-Family
	District (DH-2)

APPLICANTS MUST ADDRESS ALL COMMENTS AND FINDINGS AS IDENTIFIED BY MEMBERS OF THE TECHNICAL ADVISORY COMMITTEE BOTH IN WRITING (IDENTIFY PAGE NUMBER OF THE CORRECTION) AND ON THE SITE PLAN (ALL CHANGES MUST BE IDENTIFIED, I.E. BUBBLED).



A. <u>APPLICATION SUBMITTAL</u>

Mawusi Khadija Watson, Planning Administrator (<u>mwatson@hollywoodfl.org</u>) 954-921-3471

- 1. Application Form:
 - a. Complete the "explanation of request" section for the proposed development. *Response: Revised Accordingly.*
- 2. Ownership & Encumbrance Report (O&E):
 - a. Work with Engineering Division to ensure the O&E is accurate and all easements and dedications are indicated.
 Response: OK
 - b. Ensure O&E addresses the requirements on the TAC submittal checklist: <u>http://www.hollywoodfl.org/ArchiveCenter/ViewFile/Item/453</u> *Response: OK*
- 3. Alta Survey:
 - a. Work with the Engineering Division to ensure the survey includes the appropriate elements such as all easements and dedications are indicated. *Response: OK*
- 4. Provide plat determination letter from the County. Should platting be necessary, prior to Final TAC submittal County Plat comments are required. Plat shall be submitted for recordation prior to submitting for Planning and Development Board. Include several copies of plat documents in future submittals. *Response: Plat Determination Letter provided*
- 5. Complete and submit to Broward County School Board an impact fee application prior to submitting for Board consideration. Ensure that the application has not expired at the time of Board Consideration Website: https://www.browardschools.com/cms/lib/FL01803656/Centricity/Domain/13479/PublicSc hoolImpactAp plication1.pdf Response: Application and payment have been submitted, pending SCAD letter
- 6. Indicate past, current and future meeting dates as they happen (not submittal dates) on Cover Sheet. Indicate specific Board/Committee (i.e. TAC, PDB, etc.) For future Board/Committee dates not known, leave blank until staff has advised of next meeting date. *Response: Provided on Cover Sheet.*
- 7. A public participation outreach meeting shall be required for Land Use, Rezoning, Special Exception, and Site Plan requests. Applicants shall conduct at least one public participation outreach meeting and provide mailed written notice to all property owners and certified/registered civic and neighborhood association(s) within 500 feet of the proposed project. Fifteen days prior to the meeting, the applicant shall mail such notice and post a



LLR Architects Inc.

sign on the property, including the date, time, and place of the public participation outreach meeting. Such meeting shall occur prior to the applicable Committee, Board or City Commission submittal and the Applicant shall include in its application packet a letter certifying the date(s), time(s), location(s), a copy of the sig-in sheet, presentation material and general summary of the discussion, including comments expressed during the meeting(s).

Visit <u>http://www.hollywoodfl.org/204/Neighborhood-Association-Contact-List</u> for Contact Information.

Response: Response: Public participation will be held in early April.

- 8. Additional comments may be forthcoming.
- 9. Provide written responses to all comments with next submittal.

B. ZONING

Mawusi Khadija Watson, Planning Administrator (<u>mwatson@hollywoodfl.org</u>) 954-921-3471

- 1. Site Plan:
 - a. Use a heavier line weight and label the building location. As submitted, it is difficult to determine where the footprint of the building is shown on the site plan. *Response: Revised Accordingly, refer to SP-1.*
 - b. The front setback dimensions of the site plan and site data shall be revised match. *Response: Revised Accordingly, refer to SP-1.*
 - c. Dimension all balcony setbacks to all property lines. Per Sec. 4.6.B.3.a.(9)(i), balconies may encroach a maximum of 75% into the required setback. *Response: Revised Accordingly, refer to SP-1 & A-1.1*
 - d. Identify and label all landscaped areas. *Response: Revised Accordingly, refer to SP-1.*
 - e. Identify the proposed bike storage location. *Response: Revised Accordingly, refer to SP-1.*
 - f. Specify the purpose of Detail 6 on the plan. It is unclear what this detail is referencing.
 Response: Removed not applicable
 - g. Note 1 references two entrances. Is this a typo? *Response: Revised Accordingly, refer to SP-1.*
 - h. Note 2 references Monroe St. Include correct street name. *Response: Revised Accordingly, refer to SP-1.*



- 2. Site Tabular Data:
 - a. The incorrect zoning district is listed. The property is zoned DH-2. Revise the data to reference the correct zoning district and regulations (FAR, setback, height). *Response: Revised Accordingly, refer to SP-1.*
 - b. Include the provided FAR as a ratio, not just the overall provided square footage. *Response: Revised Accordingly, refer to SP-1.*
 - c. Guest parking in the site data incorrectly states 34 units are proposed. *Response: Revised Accordingly, refer to SP-1.*
 - d. Include the number of required and proposed ADA spaces. *Response: Revised Accordingly, refer to SP-1.*
 - e. Include the net and gross site area, consistent with the survey. The site data includes net site area only. *Response: Revised Accordingly, refer to SP-1.*
 - f. Per Sec. 4.6.B.3.a.(7), include the minimum required and provided dwelling u nit sizes and cumulative averages. *Response: Revised Accordingly, refer to SP-1.*
- Ensure the FAR calculations (Detail 7) include all rooftop spaces, including lobby, elevator and stairs.
 Response: Amenities areas do not count towards F.A.R. Refer to calculation on SP-1.2
- 4. It is unclear how the dumpster / trash collection area adjacent to the lobby will be accessed for trash collection, and how it will be maneuvered between parking spaces. *Response: Revised Accordingly, refer to SP-1.*
- 5. Include a detail for the dumpster area specific to its location and proposed usage. The generic detail on the site plan details sheet is not accurate for the proposed location. *Response: Revised Accordingly, refer to SP-1.2*
- 6. The stairs on the east side of the building do not connect to any internal walkway. Note, concrete slabs/landings shall provide a minimum 3' setback from all property lines, unless providing access to right- of-way. *Response: Can we discuss this issue with Andria W. as well. The code references encroachment of 50% into front setback. Our Stair which is an entry feature on the side is placed there due to the lots depth and will act as a central location. I can redesign to meet setback but it ruins the pedestrian walkway and hierarchical feature.*
- 7. Include the dimensions for parking spaces 51, 52 and 53. *Response: Revised Accordingly, refer to SP-1.*



- Based on the elevations, renderings and site plan, parking space 26 appears to be adjacent to a wall on both sides and is required to be widened to 10'-6".
 Response: Refer to revised Site Plan and Elevation showing column and not a wall
- 9. Add a note to the site plan that the parking lift system shall not be for the use of guests. *Response: Revised Accordingly, refer to SP-1.*
- 10. Provide a backup generator and identify the location on the site plan, along with a detail, that will be suitable to operate the lift system in the event of power failure. *Response: Revised Added note 7 to SP-1.*
- 11. Provide a detail (plan view and elevation) for the proposed parking lift system which demonstrates adequate vertical clearance is available when both cars are parked on the lift. *Response: Refer to Specifications Sheet*
- Provide a spec sheet for the proposed parking lift system which demonstrates how the lifts will operate.
 Response: Refer to Specifications Sheet
- 13. Provide a letter from the parking lift manufacturer prior to receiving TAC sign-off confirming that the proposed site plan/floor plan/elevations can sufficiently accommodate the proposed lift system. The letter should also provide confirmation that the type of generator to be utilized in the event of power failure will be adequate to operate the proposed lift system.

Response: To be provided.

- 14. Staff will be recommending a condition of approval requiring a covenant running with the land that holds the city harmless against any claims arising from accidents as a result of the use of mechanical parking lifts, in a form acceptable to the City Attorney, shall be submitted prior to the issuance of permits and recorded in the Public Records of Broward County by the city prior to the issuance of a certificate of occupancy or certificate of completion. *Response: Owner to provide covenant.*
- 15. Provide a detail for the proposed bike rack. *Response: provided on Sheet SP-1.3*
- 16. Remove the parking calculations table from the floor plans. *Response: revised Accordingly*
- 17. If landscaping is proposed on the roof, include a landscape plan sheet for the proposed species and plantings for the roof level.*Response: revised Accordingly*



 Work with the City's Landscape Architect to ensure that all landscape requirements are met.
 Response: revised Accordingly

C. ARCHITECTURE AND URBAN DESIGN

Mawusi Khadija Watson, Planning Administrator (<u>mwatson@hollywoodfl.org</u>) 954-921-3471

1. Per Sec. 4.6.B.3.(a)(3), "Buildings shall have a recognizable entrance facing rights-ofway". The proposed design has an entrance on the side of the building which is denoted on the plan to be accessed by a "fire access gate". There is no entrance facing the rightof-way. Revise the design to provide the primary entrance facing Van Buren Street, as required by Code.

Response: revised Accordingly

2. Per Sec. 4.6.B.3.a.(11), building articulation is required to reduce visual mass. Other than balcony projections, there is no articulation to the building façade. Consider adding articulation to all four sides of the building. Also consider whether balcony width should be revisited given proximity to side lot lines.

Response: revised Accordingly

3. Per Sec. 4.6.B.3.1.(9)(b)(iii), demonstrate on the elevations and floor plans that all enclosed or covered rooftop amenities do not exceed the maximum height for more than 30 percent of the gross rooftop area.

Response: revised Accordingly

4. The stairs on the west side of the building encroach within the required side setback. Per Code, stairs must comply with the principal building setback and must be enclosed and screened in such a manner that they are designed as integral part of the building design.

Response: see previous response to this item.

- 5. The floor plans and roof plan indicate the stairs extend all the way to the roof level, but the elevations do not reflect same. Revise all plans for consistency and ensure design meets setback and height limitation requirements. *Response: revised Accordingly*
- 6. Include the dimension to the top of elevator shaft and fitness center on the elevations. Per Sec. 4.22.E, elevator bulkheads may not exceed 25% of the maximum building height. A variance maybe required as the design includes stairs and a lobby in addition to the elevator. *Response: revised Accordingly*
- 7. It is unclear if the east elevation is open on the first floor. The site plans and floor plans suggest it is, however, the elevations are not labelled. *Response: revised Accordingly*



- All first floor openings shall be screened from floor to ceiling. The project utilizes parking lifts which require screening on all sides. *Response: revised Accordingly*
- 9. Provide a detail for all screening of the garage. *Response: revised Accordingly*
- 10. Remove landscaping and furnishings from the elevation sheets. *Response: revised Accordingly*
- Include the property lines and setbacks to the building, balconies and all other projections on the floor plans and elevations.
 Response: revised Accordingly
- The proposed color scheme on the renderings predominantly uses a single color. Consider adding additional colors, materials and finishes for the building, rather than a single color over what appears to be stucco.
 Response: revised Accordingly
- Provide color, finish and materials legend for all elevations. The legend was provided but it does not include color and finish samples / specifications.
 Response: To be provided
- 14. Provide renderings for all four sides of the building and ensure the renderings match the proposed elevations and landscaping plan, as well as identify any fencing and gates. Work with the City's Landscape Architect to ensure species proposed are appropriate. *Response: OK*
- 15. Provide a detail for the fence and all gates. Ensure the design is compatible with the building. *Response: refer to SP-1.3*
- 16. Ensure that all plumbing, mechanical and electrical fixtures and equipment are indicated on Site Plan and Elevations.*Response: OK*
- 17. Work with the Building Department to ensure that adequate ventilation is provided for the parking garage.*Response: Ok*



LLR Architects Inc.

D. <u>SIGNAGE</u>

Mawusi Khadija Watson, Planning Administrator (<u>mwatson@hollywoodfl.org</u>) 954-921-3471

1. Application is substantially compliant.

E. <u>LIGHTING</u>

Mawusi Khadija Watson, Planning Administrator (<u>mwatson@hollywoodfl.org</u>) 954-921-3471
1. Application is substantially compliant.

F. <u>GREEN BUILDING & ENVIRONMENTAL SUSTAINABILITY</u>

Mawusi Khadija Watson, Planning Administrator (<u>mwatson@hollywoodfl.org</u>) 954-921-3471

1. As per the City of Hollywood's green building ordinance in Chapter 151, the project will require a third party green building certification since this project has more than 20,000 square feet of total floor area. USGBC's LEED certification or Florida Green Building Coalition certification are the minimum standards. Include which third party certification program this project has chosen in a note on the site plan and provide green registration documentation with next submittal.

Response: Refer to note on SP-1.1

- Indicate on the site plan where the infrastructure necessary for future installation of electric vehicle- charging equipment will be located. (See 151.154, Ordinance O-2016-02) Consider placing it adjacent to a handicapped space so that the future charger will be accessible from both types of spaces.
 Response: Refer to note on SP-1.1
- Work with Building Department to ensure compliance with Green Building Ordinance. Review and adjust drawings as necessary. Indicate on drawings Green Building certification to be achieved and remove the list of Green Building Practices. *Refer to note on SP-1.1*

G. <u>ENGINEERING</u>

Azita Behmardi, City Engineer (<u>abehmardi@hollywoodfl.org</u>) 954-921-3251 Clarissa Ip, Assistant City Engineer (<u>cip@hollywoodfl.org</u>) 954-921-3915 Rick Mitinger, Transportation Engineer (<u>rmitinger@hollywoodfl.org</u>) 954-921-3990

- 1. See attached Memorandum containing Engineering's comments dated January 26, 2023.
- 2. Additional comments may be forthcoming.



H. LANDSCAPING

Favio Perez, Landscape Reviewer (<u>fperez@hollywoodfl.org</u>) 954-921-3900 Clarissa Ip, Assistant City Engineer (<u>cip@hollywoodfl.org</u>) 954-921-3915

- 1. Provide tree disposition plan. *Response: Provided*
- 2. provide sod species on plant schedule. Response: Provided
- Label all sides of property weather there are 'Existing Overhead Powerlines' or 'No Overhead Powerlines'. Provide FPL approved trees for planting under powerlines. *Response: Provided*
- 4. Tree removal Disclaimer: Write this statement on ALL sheets for existing/proposed landscape: 'Trees and Palms shall not be removed without first obtaining an approved Tree Removal Permit from the City of Hollywood. *Response: Provided*
- 5. Provide information requested for further review. *Response: Provided*
- 6. Additional comments may follow upon further review of requested items and information provided. *Response: Provided*
- 7. We encourage you to reach out for any questions or clarification at fperez@hollywoodfl.org or 954-921- 3900. *Response: Provided*

I. <u>UTILITIES</u>

Alicia Verea-Feria, Floodplain Development Review Administrator (*averea-feria@hollywoodfl.org*) 954-921-3302

- 1. Location map shown on Sheet SP-1.1 does not indicate proposed location. *Response: revised Accordingly*
- 2. Note on survey all elevations shall reference NAVD88. *Response: revised Accordingly.*
- Show size of existing 8-inch PVC water main and 15-inch PVC sewer main within Van Buren Street. *Response: revised Accordingly*
- 4. Proposed water and fire services shall be connected to the existing 8-inch water main within Van Buren Street. *Response: revised Accordingly*
- Include size of proposed water service line, tap, backflow preventer and water meter to be located as close to the property line as possible.
 Response: revised Accordingly



- 6. A new cleanout shall be installed at the property line within the private property upon field verification of existing sewer service lateral within Van Buren Street. *Response: revised Accordingly*
- 7. This site resides currently within FEMA Flood Zone X. The proposed FFE should comply with the proposed Finished Floor Elevations (FFE) requirements shall comply with the greatest of the following three (3) conditions, as applicable.

a. Section 154.50 of the City's Code of Ordinances requires the minimum FFE for residential shall be, at a minimum, 18-inches above the elevation of the crown of the adjacent road or 6-inches, at a minimum, for non-residential use.

b. Broward County Preliminary 2019 FEMA Flood Maps (as recommended), available online via the following link:<u>https://bcgis.maps.arcgis.com/apps/View/index.html?appid=ea44837317</u> bd47eaa5373ce3e2f01b6e;

OR

c. Broward County Future Conditions 100-year Flood Map 2060 (in effect as of July 2021), available online via the following link:<u>https://bcgis.maps.arcgis.com/apps/webappviewer/index.html?id=ec160b81e7f84bd eacda6257 5e817380Indicate</u> FFE for all enclosed areas on the ground floor.

8. Show dimensions of setbacks on plan view of Sheet C-1.1 to match dimensions provided on sections.

Response: revised Accordingly

- 9. Elevations shall match existing grade at property line per elevations provided on survey. *Response: revised Accordingly*
- Ensure all stormwater is retained onsite. Provide exfiltration trench lengths, material, size, rim and invert elevations.
 Response: revised Accordingly.
- 11. Show swale areas on plan view of Sheet C-1.1. *Response: revised Accordingly*
- 12. Indicate how roof drainage will be collected and connected to the on-site drainage system. *Response: revised Accordingly*
- 13. Provide preliminary drainage calculations. *Response: revised Accordingly*
- 14. Submit Erosion Control Plan and details. *Response: Refer to C-1.5*
- 15. Permit approval from outside agencies will be required. *Response: OK*



- 16. Landscape plans shall coordinate with civil plans to accommodate proposed drainage features. *Response: OK*
- 17. Additional comments may follow upon further of requested items.

J. <u>BUILDING</u>

Russell Long, Chief Building Official (<u>rlong@hollywoodfl.org</u>) 954-921-3490 Daniel Quintana, Assistant Building Official (<u>dquintana@hollywoodfl.org</u>) 954-921-3335

- 1. No comments received.
- 2. Planning staff will follow up with Building.

K. <u>FIRE</u>

Jorge Castano, Deputy Fire Marshal / Battalion Chief (<u>jcastano@hollywoodfl.org</u>) 954-967-4404

- 1. Fire review for TAC is limited to fire department access and minimum fire flow requirements for water supply for firefighting purposes. A complete architectural review will be completed during formal application of architectural plans to the building department.
- 2. At time of submittal, water supply must meet NFPA 1, 18.4.5.3. In order to determine the minimum fire flow for firefighting purposes, a hydrant flow test will need to be scheduled through our underground utilities dept., 954-921- 3046. After the results are completed, the civil engineer shall show on civil drawings the calculations using table 18.4.5.1.2 showing that the project meets the minimum fire flow requirements for the building.
- 3. Provide a note on civil drawing all underground fire main work must be completed by fire protection contractor holding a Class I, II, or V license per FS 633.102.
- 4. At time of submittal civil drawings must be provided for the underground fire main. Providing location of fire department connection, fire hydrants, DDCV, and size of fire line from water supply, etc. Check with our water department engineer for city requirements in addition to fire. Ensure plans show that there is a fire hydrant within 100 feet of fire department connections.
- 5. Be advised that NFPA 1 (2018 edition) Chapter 11.10.1 requires that minimum radio signal strength for fire department communications be maintained at a level determined by the AHJ for all new and existing buildings including complying with NFPA 72 (2016 edition). BDA system may be required.



LLR Architects Inc.

- 6. Per NFPA 1, 12.3.2* a quality assurance program for the installation of devices and systems installed to protect penetration and joints shall be prepared and monitored by the registered design professional responsible for design. Inspections of fire stop systems and fire-resistive joint systems shall be in accordance with 12.3.2.1 and 12.3.2.1. Architectural plans will be required to show this information moving forward for buildings three stories or greater in height. Provide a note on the plan regarding NFPA 1, 12.3.2*.
- 7. It was noted on the plan, there may be stacked car parking. Be advised, the fire sprinkler system will need to be designed as Extra Hazard, Group II. Provide a note on the plan as such.

L. <u>PUBLIC WORKS</u>

Annalie Holmes, Interim Public Works Director (aholmes@hollywoodfl.org) 954-967-4207

- 1. No comments received.
- 2. Planning staff will follow up with Public Works.

M. PARKS, RECREATION AND CULTURAL ARTS

David Vazquez, Assistant Director (<u>dvazquez@hollywoodfl.org</u>) 954-921-3404

1. A Parking Impact Fee form has been submitted. Planning staff is waiting for approval from Parks.

N. <u>COMMUNITY DEVELOPMENT</u>

Liliana Beltran, Housing inspector (<u>lbeltran@hollywoodfl.org</u>) 954-921-2923

- 1. No comments received.
- 2. Planning staff will follow up with Community Development.

O. ECONOMIC DEVELOPMENT

Raelin Storey, Director (<u>rstorey@hollywoodfl.org</u>) 954-924-2922 Herbert Conde-Parlato, Economic Development Manager (<u>hconde-parlato@hollywoodfl.org</u>) 954-924-2922

1. Application is substantially complaint.

P. POLICE DEPARTMENT

Christine Adamcik, Police (<u>cadamcik@hollywoodfl.org</u>) 954-967-4371 Steven Bolger, Police (<u>sbolger@hollywoodfl.org</u>) 954-967-4500 Doreen Avitabile, Police (<u>davitabile@hollywoodfl.org</u>) 954-967-4371

- 1. Application is substantially complaint.
- 2. See Attached CPTED Blueprint Review/Recommendations memorandum from the Police Department dated January 25, 2023.



LLR Architects Inc.

Q. DOWNTOWN AND BEACH CRA

Jorge Camejo, Executive Director (jcamejo@hollywoodfl.org) 954-924-2980 Susan Goldberg, Deputy Director (sgoldberg@hollywoodfl.org) 954-924-2980 Francisco Diaz-Mendez, Project Manager (<u>fdiaz-mendez@hollywoodfl.org</u>) 954-924-2980

- 1. No comments received.
- 2. Planning staff will follow up with CRA.

R. PARKING

Jovan Douglas, Parking Administrator (jdouglas@hollywoodfl.org) 954-921-3548

- 1. No comments received.
- 2. Planning staff will follow up with Parking.

S. ADDITIONAL COMMENTS

Mawusi Khadija Watson, Planning Administrator (<u>mwatson@hollywoodfl.org</u>) 954-921-3471

1. Additional comments may be forthcoming.

The Technical Advisory Committee finds this application substantially compliant with the requirements of Preliminary Review; therefore, the Applicant should submit for Final TAC review.

Please be advised, in the future any additional review by the TAC may result in the payment of additional review fees.

If these comments have not been addressed within 120 days of this dated report the application will expire. As a result, a new application and fee will be required for additional review by the TAC.

Note that any use proposed for the site shall be consistent with Zoning and Land Development

Regulations. Should you have any questions, please do not hesitate to contact your Project

Planner at 954-921-3471.

Sincerely,

Mawusi Khadija Watson



March 6, 2023

Van Buren Flats LLC 541 Avellino Isles Cir, # 30201 Naples, FL 34119

FILE NUMBER: 23-DP-08

SUBJECT: Preliminary Site Plan review for a 42 Unit residential development.

SITE DATA

Owner/Applicant:	Van Buren Flats LLC
Address/Location:	2202-2204 Van Buren Street
Net Size of Property:	20,492 sq. ft. (0.47 acres)
Land Use:	Regional Activity Center (RAC)
Zoning:	Dixie Highway Medium Intensity Multi-Family
	District (DH-2)
Present Use of Land: Year Built:	Residential 1949 (Broward County Property Appraiser)

ADJACENT LAND USE

North:	Regional Activity Center (RAC)
South:	Regional Activity Center (RAC)
East: West:	Regional Activity Center (RAC) Regional Activity Center (RAC)

ADJACENT ZONING

North:	Transitional Core District (TC-1)
South:	Dixie Highway Medium Intensity Multi-Family
	District (DH-2)
East: West:	Planned Development District (PD) Dixie Highway Medium Intensity Multi-Family District (DH-2)

LLR Architects Inc. 9000 Sheridan Street-suite 158 Pembroke Pines, FL 33024



Dear Board Members,

It's with great pleasure we are presenting a 42-unit, 4-story, multi-family residential building. This project was designed with the intention to enhance the property and the surrounding neighborhood.

1. Design Criteria:

The architectural style for this 42-unit 4-story, +/-35,000 SF multi-family residential building embodies a truly modern style. The use of various materials like wood, raised bands and irregular scoring and paint at the façade as well as the large glass panels provide a contemporary look and feel as well as natural light on every floor. The design is all about consideration of aesthetics maintaining the residential functionality.

2. Compatibility:

The existing neighborhood consists of single and multi-family residential. This new development will be compatible with the residential neighborhoods and the new look of the RAC district. The 4-story scale is designed for the West Side of the lot. There is an entry feature to the West side of the entry which promotes pedestrian access to elevator Lobby along the side of the property. A hierarchical tower compliments the walkway and standout from the street. Architecturally this movement in the facade works with the neighborhood and enhancing the street and pedestrian areas.

3. Landscaping:

The landscaping has been integrated with the building design to emphasize the architectural features and help screen the parking areas from the street.

4. Site Massing: The 4-story project is located on Van Buren Street. The front setback is 15 feet thus stepping the building back to allow for pedestrian friendly experience. The massing of the front elevation differentiates in height and along the setback line. There is an entry feature to the West side of the entry which promotes pedestrian access to elevator Lobby along the side of the property. A hierarchical tower compliments the walkway and standout from the street. Material changes on the wall softens the balconies bold look. This varied element prevents the front façade from being flat. The side façade along are setback from neighbors10 feet. A roof top amenities deck compliments the bold look of the building.

This new 42- unit development will help the improvement of the surrounding neighborhood on Van Buren St. We hope to have your support and acceptance of this new project.

LLR Architects Inc. 9000 Sheridan Street-suite 158 Pembroke Pines, FL 33024

(office) 9564-862-2248 e-mail: llarosa@larosaarchitects.com



February 22, 2023

Luis La Rosa, A.I.A., President LLR Architects, Inc. 9000 Sheridan Street, Suite 158 Pembroke Pines, Florida 33024 Via Email Only

Dear Mr. La Rosa:

Re: Platting requirements for a parcel legally described as Lot 22, Block 5, "Hollywood Little Ranches," according to the Plat thereof, as recorded in Plat Book 1, Page 26, of the Public Records of Broward County, Florida. This parcel is generally located on the south side of Van Buren Street, between Dixie Highway and South 24 Avenue, in the City of Hollywood.

This letter is in response to your correspondence regarding the Broward County Land Use Plan's platting requirements for a proposed multi-family residential development on the above referenced parcel.

Planning Council staff has determined that replatting <u>would not be required</u> by Policy 2.13.1 of the Broward County Land Use Plan (BCLUP) for the proposed development, subject to compliance with any applicable Broward County Trafficways Plan requirement.

As per the criteria of Policy 2.13.1, replatting is required for the issuance of building permits when constructing a non-residential or unified residential development, unless all of the following conditions are met:

- a. The lot or parcel is smaller than 10 acres and is unrelated to any adjacent development;
- b. The lot or parcel has been specifically delineated in a recorded plat;
- c. All land within the lot or parcel which is necessary to comply with the County Trafficways Plan has been conveyed to the public by deed or easement; and
- d. The proposed development is in compliance with the applicable land development regulations.

The subject parcel is less than 10 acres (approximately 0.47 acres) and meets the specifically delineated requirement. This platting interpretation is subject to the municipality finding that the proposed development is unrelated to any adjacent development, as noted in "a." above.

Luis La Rosa February 22, 2023 Page Two

Some jurisdictions may be more restrictive and require platting in more situations than the BCLUP. The City of Hollywood's platting requirements should be investigated.

The contents of this letter are not a judgment as to whether this development proposal complies with State or local vehicular access provisions, the Broward County Trafficways Plan, permitted uses and densities, local zoning, the land development regulations of the municipality or the development review requirements of the BCLUP, including concurrency requirements.

If you have any additional questions concerning the BCLUP's platting requirements, please contact Huda Ashwas at your convenience.

Respectfully,


Barbara Blake Boy Executive Director

BBB:HHA

cc/email: Dr. Wazir Ishmael, City Manager City of Hollywood

> Shiv Newaldass, Director, Development Services City of Hollywood



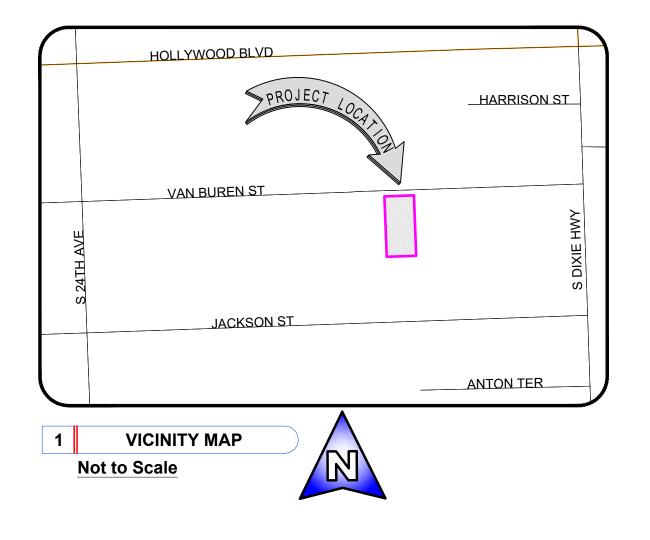

2 PROPERTY ADDRESS

2202-2204 Van Buren Street, #1-4, Hollywood, Florida

3 LEGAL DESCRIPTION

Lot 22, Block 5, HOLLYWOOD LITTLE RANCHES, according to the plat thereof, as reco Page 26, of the Public Records of Broward County, Florida.

4 AREA TABULATION

Net Area of subject parcel: 20,492.47 SqFt (+/-0.47 Acres) Gross Area of subject parcel: 22,492.47 SqFt (+/-0.52 Acres)

5 ZONING INFORMATION

Zoning District: DH-2 (Dixie Highway Medium Intensity Multi-Family District as per Hollywood Zoning Map)

7 CERTIFICATIONS

I hereby certify to: Van Buren Flats, LLC.

That this map or plat and the survey on which it is based were made in accordance with the 2021 Minimum Standard Detail Requirements for ALTA/NSPS Land Title Surveys, jointly established and adopted by ALTA and NSPS, and includes Optional Items 1, 2, 3, 4, 5, 6, 7 (a) (1), 8, 9, 11 (utilities by observed aboveground visible evidence), 13, 17, 18 and 19 of Table A thereof.

Date of Plat or Map: January 20th, 2023

Odalys C. Bello-Iznaga Professional Surveyor & Mapper # 6169 State of Florida

ALTA / NSPS LAND TITLE SURVEY

A PARCEL OF LAND LYING AND BEING A PORTION OF SE 1/4 OF SECTION 16, TOWNSHIP 51 SOUTH, RANGE 42 EAST, & SW 1/4 SECTION 15, TOWNSHIP 51 SOUTH, RANGE 42 EAST, CITY OF HOLLYWOOD, BROWARD COUNTY, FLORIDA

6	SURVEYOR'S REPORT
1	. This ALTA/NSPS Survey has been made on the ground on January 6th, 2023 under my supervision and procedures and techniques were applied while conducting this survey. Field findings results and its relationsh
2	. This map of an ALTA Survey has been prepared in accordance with the 2021 Minimum Standard Detail Req Title Association (ALTA) and the National Society of Professional Surveyors (NSPS) effective February 23, 2
3	. This ALTA Survey correctly depicts the lands contained within the subject property as herein described and a and any other relevant matters affecting these lands. Underground utilities and footings have not been locate closed geometric figure. Distances and directions along the boundary lines as reestablished based on the h site work are in consistency with distances and directions from records.
4	. Except as listed herein there are no other visible easements, right of ways and servitudes of which the une ground potential encroachments by the improvements on this property upon adjoining parcels, streets, eas detailed location of underground utilities.
5	. There is no observable evidence of site usage as solid waste dump, swamp and/ or sanitary landfill on this lo
6	. This property has access to and from a duly dedicated and accepted public Right of Way: Van Buren Stree right of way lines for these roadways.
7	. No evidence of recent earth moving work, building construction or additions have been observed in the proce
8	. No evidence of wetland field designations were present at the time of the survey.
9	FLOODPLAIN INFORMATION: As scaled from Federal Insurance Rate Map (FIRM) of Community No. 125 ⁴ Zone "X". As defined by FEMA, Zone "X" is an area of minimal flood hazard, outside the Special Flood Ha flood insurance purchase requirements and floodplain management standards apply. This determination is o in this area.
1	0. HORIZONTAL LOCATION AND ACCURACY: The lands surveyed had been located on the ground with maximum allowable Relative Positional Precision for ALTA/NSPS Land Title Survey, which equals 2 cm measurements) and office calculations meets and exceeds the customary minimum horizontal feature accurated
a 33020	 VERTICAL CONTROL AND ACCURACY: The elevations as shown are referred to the North American Verform NGVD 1929 to NAVD 1988 datum is (-) 1.51 feet or (minus 1.51 feet). The closure in feet, as computed Elevation are based on a level loop from and to the following official Bench Marks: Bench Mark # 1: National Geodetic Survey Bench Mark N 239, Elevation = 9.24 feet (NAVD88) Location: Is on the intersection of Dixie Highway and Taft Street 15.9 feet of the extended center of Roosevel Bench Mark # 2: National Geodetic Survey Bench Mark P 239, Elevation = 9.07 feet (NAVD88) Location: Is on the intersection of North 21st Avenue and Polk Street 2.4 feet of the near rail of the Florida Earth of the stended center of Roosevel Bench Mark # 2: National Geodetic Survey Bench Mark P 239, Elevation = 9.07 feet (NAVD88)
orded in Plat Book 1, 1	 This ALTA Survey meets and exceeds the minimum Standards of Practice as set forth by the Florida Board of Code, pursuant to Section 472.027, Florida Statutes. As defined in Section 5J-17.050 this survey is a "Bound
1:	This survey map and the copies thereof, are not valid without the original signature and raised seal of the ur prohibited.

14. The intended plotting scale for this survey map is 1": 20'. Data is expressed in U.S. Survey Foot.

- 15. References to "Deed", "Record" or "Plat" pertain to documents and instruments of record as part of the pertinent information used for this survey work. These lands are subject to additional restrictions of record that were not furnished to the undersigning registered surveyor or are not reflected on the Commitment for Title Insurance provided. The instruments of record investigated in the preparation of this survey are recorded in the Public Records of Miami-Dade County, unless otherwise shown.
- 16. North arrow direction is based on an assumed Meridian. The bearing structure depicted herein is based on the assumed bearing along the Center Line of Van Buren Street being N87°55'05"E
- 18th, 1945 thru December 2nd, 2022 at 8:00 AM. According to said O&E Report there are no active encumbrances that affect this parcel.

direction employing adequate instrumentation and survey personnel. Proper survey principles, field hip to instruments of record investigated are represented herein.

uirements for ALTA/NSPS Land Title Surveys, jointly established and adopted by the American Land 2021.

accurately shows the location and type of all visible above-ground improvements, evidence of utilities ed. Existing trees have not been located. The legal description of this property forms a mathematically horizontal position of survey monuments and control points recovered and traversed during the field

dersigned has knowledge of that might affect these lands and there are no other observable above sements or right of ways. Excavation and/or a private utility locate request might be necessary for a

ot and/or on the immediately adjoining parcels.

et - along the North property line. The undersigned has no knowledge of proposed changes in street

ess of conducting the field work.

113 (City of Hollywood), Panel 0569, Suffix H, revised on August 18th, 2014, this real property falls in azard Area (SFHA) and higher than the elevation of the 0.2-percent-annual-chance flood. Mandatory obtained directly from FEMA - the undersigned assumes no responsibility for any flooding occurrence

a precision that, based on a direct distance tested between two (2) corners, does not exceed the n (0.07 feet) plus 50 parts per million. The accuracy obtained by field measurements 9redundant acy (linear) for an urban area being equal to 1 foot in 7,500 feet.

tical Datum of 1988 (NAVD 1988). Official Broward County Single Average Conversion Factor (ACF) ed, meets the standard of plus or minus 0.05 feet times the squared root of the loop distance in miles.

elt Street, the mark is a 5-inch logo cap.

ast Coast Railroad.


of Land Surveyors and Mappers, in the applicable provisions of Chapter 5J-17, Florida Administrative lary Survey".

ndersigning Florida Licensed Land Surveyor & Mapper. Additions or deletions to this survey map are

17. While preparing this survey the undersigned examined and reviewed the Ownership and Encumbrance Report (O&E), dated January 17th, 2023 prepared by Phillips Law that searched public records from June

BELLO & BELLO LAND SURVEYING 12230 SW 131 AVENUE SUITE 201 MIAMI FL 33186 LB#7262 Phone: 305 251 06.06

8	8 PROJECT NUMBER: 22737		Page 1 of 2	
FIELD DATE: 01/06/2023 UPDATED		D DATE: N/A		
QA/QC BY: OCBI DRAW		DRAWN B	BY: EO	
Additions and deletions to this Survey Map are prohibited are not valid without the signature and original raised sea electronic signature and seal of the undersigning Florida I		l or without the authenticated		

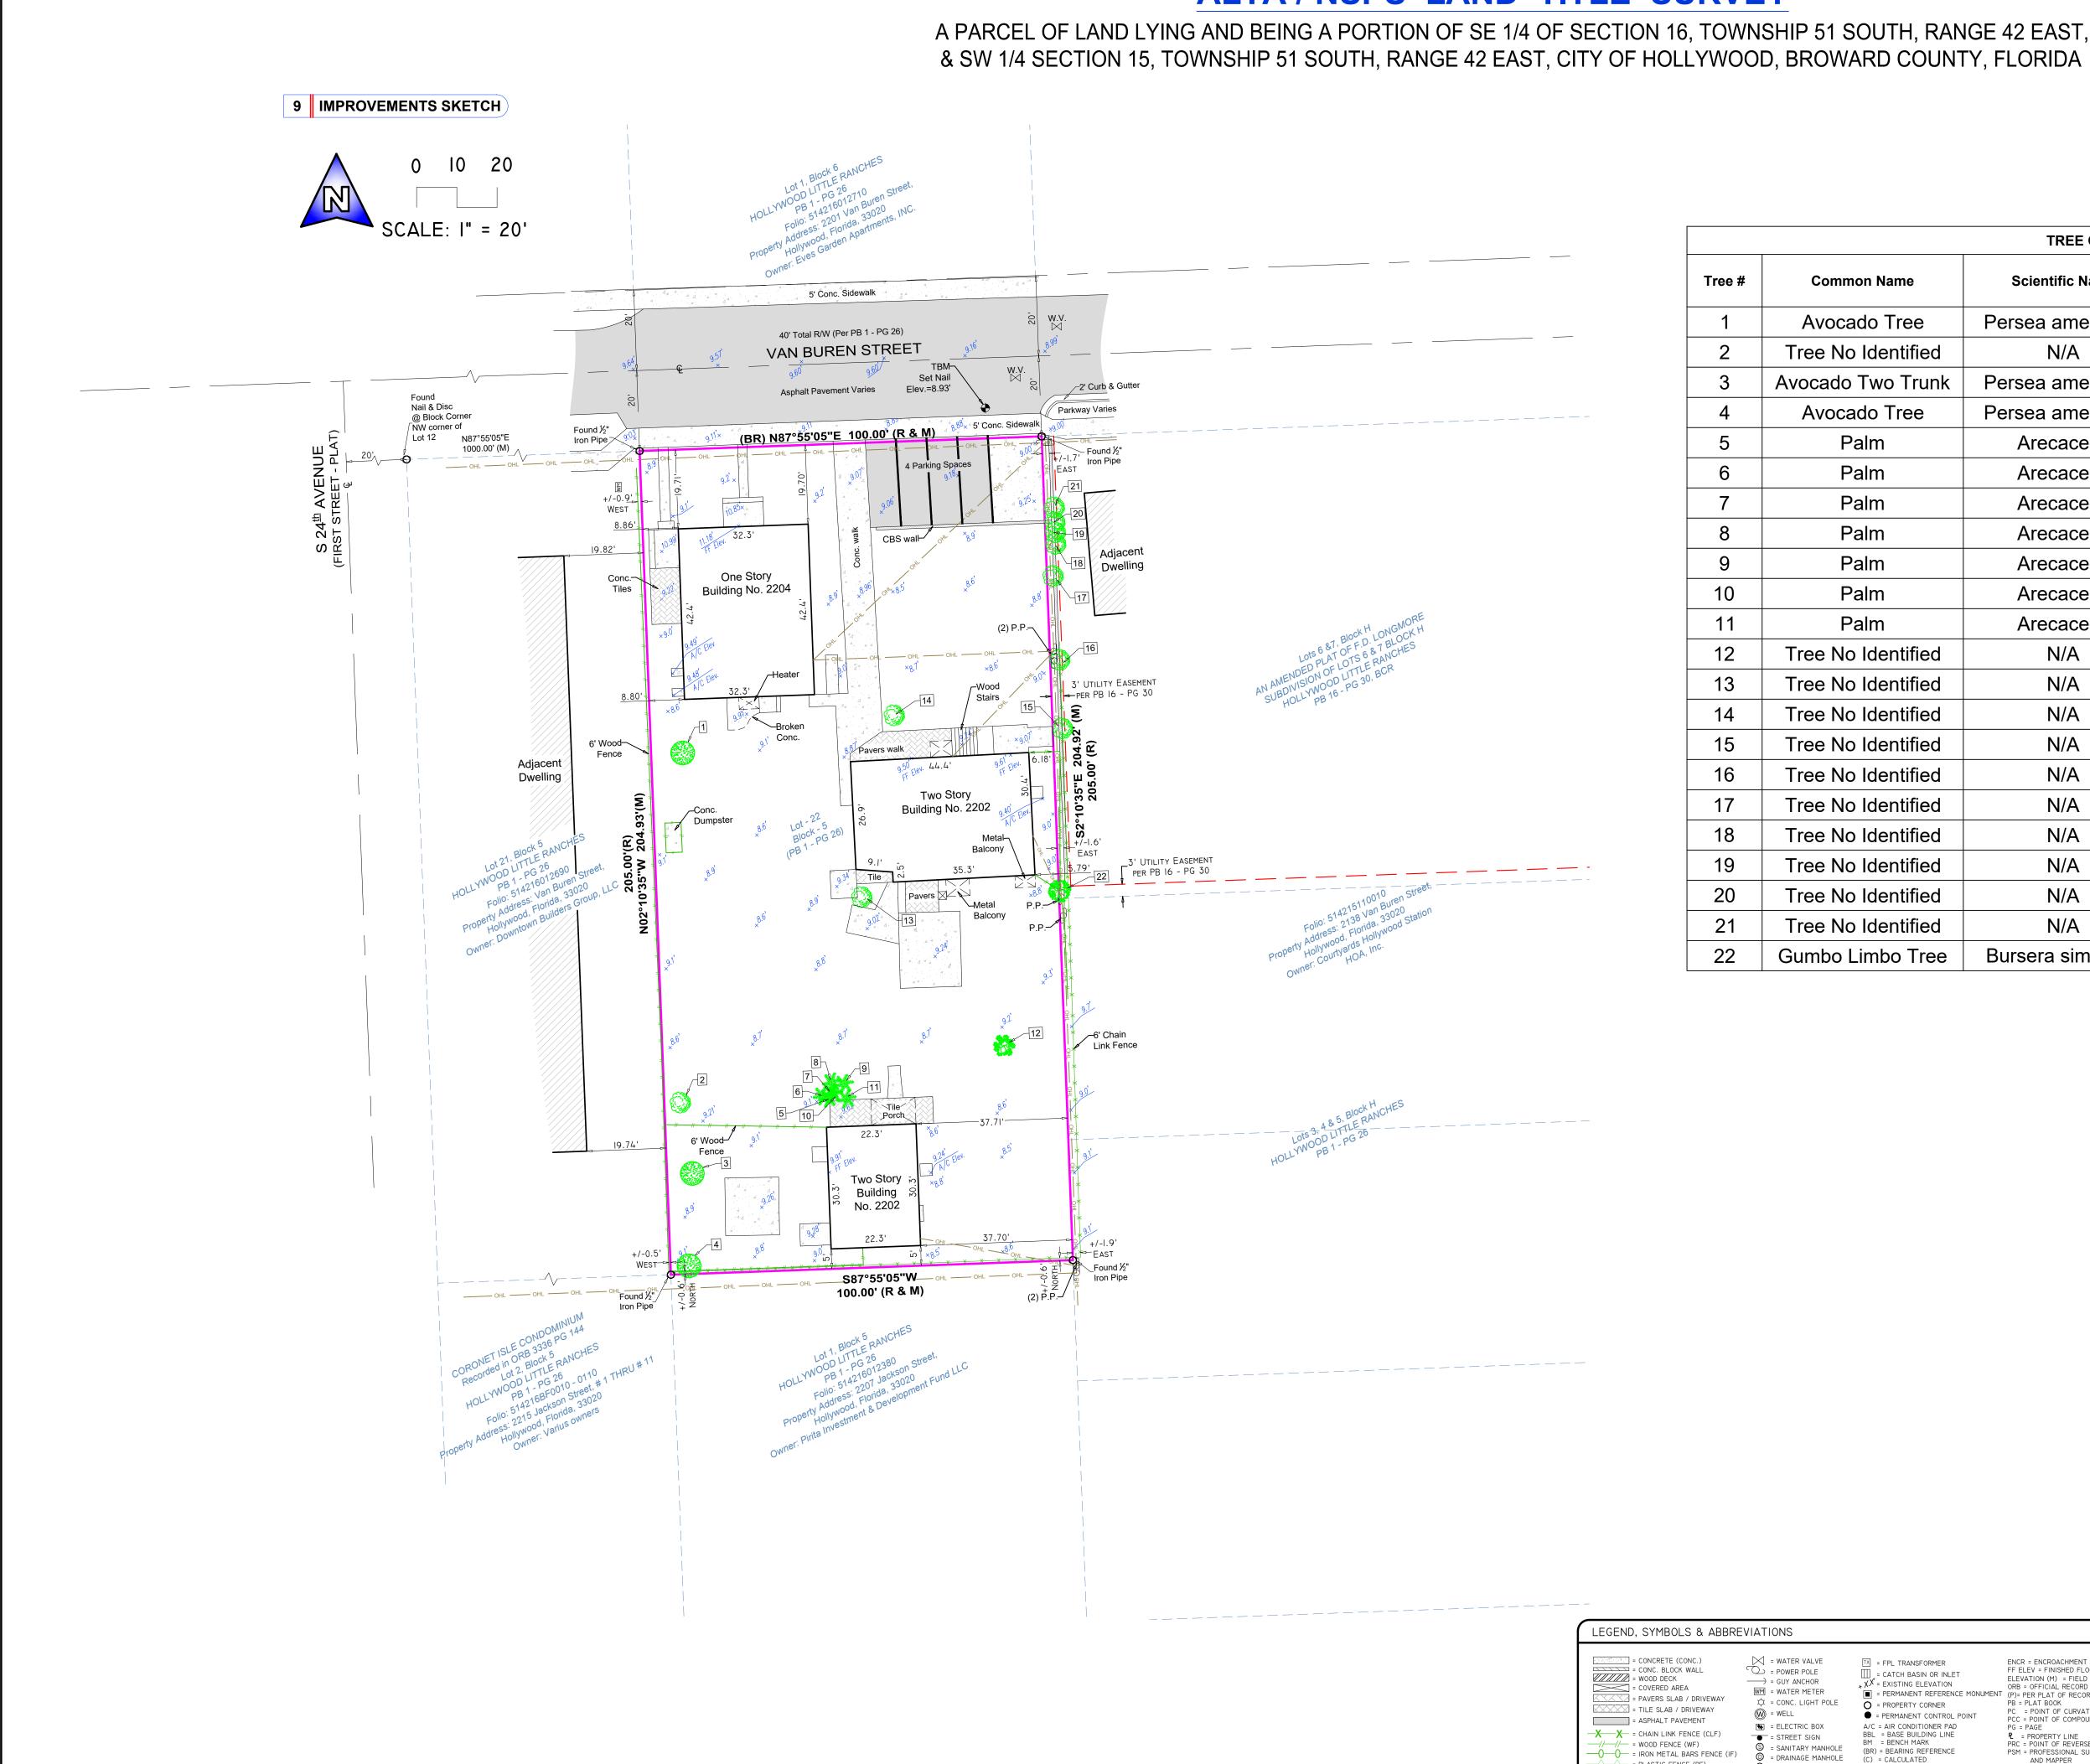

ALTA/NSPS LAND TITLE SURVEY

= OVERHEAD UTILITY LI

= MANHOLE

= FIRE HYDRANT


€ = CENTER LINE ELEV = ELEVATION

Scientific Nameall breast neight DBH(in)Height (ft)Canopy (ft)Persea americana243330adN/A483533ankPersea americana83320Persea americana183323Arecaceae8306Arecaceae83020Arecaceae83020Arecaceae83020Arecaceae83020Arecaceae83020Arecaceae83020Arecaceae <th></th> <th>TREE CHART</th> <th></th> <th></th> <th></th>		TREE CHART			
ed N/A 48 35 33 ink Persea americana 8 33 20 Persea americana 18 33 23 Arecaceae 8 30 6 Add 36 35 30 <		Scientific Name	at Breast Height		Approximate Canopy (ft)
Ink Persea americana 8 33 20 Persea americana 18 33 23 Arecaceae 8 30 6 Add 36 35 30 Add N/A 12 20 20		Persea americana	24	33	30
Persea americana 18 33 23 Arecaceae 8 30 6 Ad 36 35 30 Ad 12 20<	ed	N/A	48	35	33
Arecaceae 8 30 6 Arecaceae 8 30 20 Ad N/A 30 40 30 Ad 12 20 20	ınk	Persea americana	8	33	20
Arecaceae 8 30 6 Add N/A 36 35 30 Add N/A 30 40 30 Add N/A 12 20 20 Add N/A 8 18 14		Persea americana	18	33	23
Arecaceae 8 30 6 Arecaceae 8 35 30 Ad N/A 30 40 30 Ad N/A 12 20 20 Ad N/A 8 18		Arecaceae	8	30	6
Arecaceae 8 30 6 ed N/A 36 35 30 ed N/A 30 40 30 ed N/A 12 20 20 ed N/A 8 18 14		Arecaceae	8	30	6
Arecaceae 8 30 6 Arecaceae 8 30 6 Arecaceae 8 30 6 ed N/A 36 35 30 ed N/A 36 35 30 ed N/A 36 35 30 ed N/A 12 20 20 ed N/A 12 22 20 ed N/A 8 18 14		Arecaceae	8	30	6
Arecaceae 8 30 6 Arecaceae 8 30 6 ed N/A 36 35 30 ed N/A 12 20 20 ed N/A 12 22 20 ed N/A 8 18 14		Arecaceae	8	30	6
Arecaceae 8 30 6 ed N/A 36 35 30 ed N/A 12 20 20 ed N/A 12 22 20 ed N/A 8 18 14		Arecaceae	8	30	6
ed N/A 36 35 30 ed N/A 36 35 30 ed N/A 30 40 30 ed N/A 12 20 20 ed N/A 12 22 20 ed N/A 8 18 14		Arecaceae	8	30	6
ed N/A 36 35 30 ed N/A 30 40 30 ed N/A 12 20 20 ed N/A 12 22 20 ed N/A 8 18 14		Arecaceae	8	30	6
ed N/A 30 40 30 ed N/A 12 20 20 ed N/A 12 22 20 ed N/A 8 18 14	ed	N/A	36	35	30
ed N/A 12 20 20 ed N/A 12 22 20 ed N/A 8 18 14	ed	N/A	36	35	30
ed N/A 12 22 20 ed N/A 8 18 14	ed	N/A	30	40	30
ed N/A 8 18 14	ed	N/A	12	20	20
	ed	N/A	12	22	20
$\sim 1/2$ $N/2$ 2 $1/2$ $1/2$	ed	N/A	8	18	14
	ed	N/A	8	18	14
ed N/A 8 18 14	ed	N/A	8	18	14
ed N/A 10 20 18	ed	N/A	10	20	18
ed N/A 10 20 18	ed	N/A	10	20	18
ee Bursera simaruba 20 30 30	ee	Bursera simaruba	20	30	30

								τ Έ
			2	PROPERTY ADDRESS			2	SW 1 262
III = FPL TRANSFORMER	ENCR = ENCROACHMENT	R/W = RIGHT OF WAY	22	02 - 2204 Van Buren Street, #	[±] 1-4, Holly	/wood, Florida 33020		230 7#7
Frequencies Frequencies	SEC = SECTION TBM = TEMPORARY BENCH MARK TWS = TOWNSHIP BCR = BROWARD COUNTY RECORDS	Additions and deletions to this Survey Map are prohibited. This Survey Map and Report are not valid without the signature and original raised seal or without the authenticated electronic signature and seal of the undersigning Florida licensed Surveyor and Mapper.			12 B			
A/C = AIR CONDITIONER PAD BBL = BASE BUILDING LINE BM = BENCH MARK	PG = PAGE L = PROPERTY LINE		QA	VQC BY: OCBI	DRAWN E	BY: EO		
(BR) = BEARING REFERENCE (C) = CALCULATED CBS = CONCRETE BLOCK STRUCTURE	PRC = POINT OF REVERSE CURVE PSM = PROFESSIONAL SURVEYOR AND MAPPER PT = POINT OF TANGENCY		FIE	ELD DATE: 01/06/2023	UPDATE	D DATE: N/A	P	Ø
€ = CENTER LINE ELEV = ELEVATION	(R) = RECORD RGE = RANGE		8	PROJECT NUMBER: 227	37	Page 2 of 2		

YING

ш

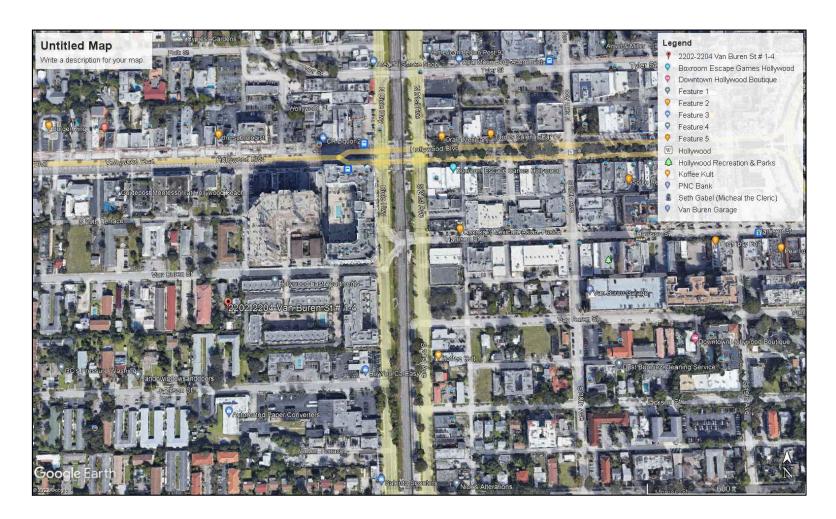

LOCATION MAP

SHEET INDEX

COVER	SHEET
SURVET	/
9P-1.1	LOCATION PLAN GENERAL NOTES LEGAL DESCRIPTION SITE DATA SITE PLAN
SP-1.2	BUILDING CALCULATION DETAIL SCREEN DUMPSTER DETAIL TYP. HANDICAP DETAIL TYP. PARKING DETAIL DIAGRAM F.A.R. CALCULATION DIAGRAM PERVIOUS & IMPERVIOUS.
C-1.1 C-1.2 C-1.3 C-1.4 C-1.5 L-1 L-2 L-3	FIRST FLOOR CIVIL PLANS SECOND FLOOR CIVIL PLANS GENERAL DETAILS PAVEMENT MARKINGS PLAN EROSION CONTROL PLAN GROUND FLOOR LANDSCAPE PLAN ROOF TOP GARDEN PLAN LANDSCAPE DETAILS


- A-1.1 FIRST FLOOR PLAN A-1.2 TYPICAL 2ND., 3RD & 4TH FLOOR PLAN A-1.3 ROOF PLAN & SUN DECK A-2.1 ELEVATIONS A-2.2 ELEVATIONS

PACO MEETING DATE: DEC. 19,2022 TAC-1 MEETING DATE: FEB. 06,2023 TAC-2 MEETING DATE: MARCH 20, 2023

PROPOSED 42-UNITS MULTI FAMILY DEVELOPMENT FOR:: VAN BUREN FLATS 2202-2204 VAN BURREN STREET, 1-4 HOLLYWOOD, FLORIDA 33020







LLR Architects, Inc. ARCHITECTURE & PLANNING

12980 SW 52 STREET MIRAMAR, FLORIDA 33027

(O)- 305-403-7926 (F)- 305-403-7928 E-MAIL: LLAROSA@LAROSAARCHITECTCTS.COM

AYLWARD ENGINEERING **CIVIL ENGINEERING**

3222 RIDGE TRACE DAVIE,FLORIDA 33328

(O)- 954-424-5852

E-MAIL: AYLWARDENGINEER@GMAIL.COM

BRANDON M. WHITE- ASLA LANDSCAPE ARCHITECTURE

1708 sw JOY HAVEN ST PORT ST. LUCIE, FL 34983 (O)-772-834-1357

	SITE C		ATIONS:	PARKING CALCU		s.				BUIL	.DING C				
	TOTAL SITE	E AREA:	2.41 S.F. OR .41 ACRES						UNIT # 1	UNIT # 2		UNIT # 4	UNIT # 5 (ONE BED.)	UNIT * 6	
	BUILDING	FOOTPRINT	AREA 12,708 S.F.	3-STUDIO (1) BEDROOM= 3XI= 3 P.S. 21-(1) BEDROOM= 21XI= 21 P.S. 12-(2) BEDROOMS= 12XI5= 18 P.S.	3 27 18		IST.	FLOOR COMMON AREA	-	-					
	DRIVEWA CONC, SL		560 S.F. 260 S.F.	GUEST PARKING SPACES (1 SPACE FOR EVERY 10 UNITS 42 UNITS)=	5		2NE	, FLOOR LIVING AREA=	786 S.F.	642 S.F.	642 S.F.	642 S.F.	642 S.F.	642 S.F.	805 :
		ERVIOUS AF		ADA SPACE REQ TOTAL PARKING SPACES	2	58	BAL	LCONY AREA:	2Ø5 S.F.	52 S.F.	52 S.F.	52 S.F.	52 SF.	50 S.F.	155 5
202.2204.Ven-BuremSt # 1/4		RVIOUS ARE			55	50		AL UNIT AREA=	991 S.F.	694 SF.	694 S.F.	694 S.F.	694 S.F.	692 S.F.	960
				SETBACK CALCU	LATION	S:		MMON AREA:							──
			ATIONS:		REQUIRED	PROVIDED		TAL GROSS AREA=							<u> </u>
	· · ·	2.47 S.F. × 1.7		FRONT	15'	15'-Ø'		D. FLOOR LIVING AREA=	786 S.F.	642 S.F.	642 S.F.	642 S.F.	642 S.F.	642 S.F.	-
	FIRST FLOOF (NOT DUMPS	R STER 4 ELECTRIC	683 S.F. AL ROOM)	REAR	20' 10'	25'-Ø' 10'-Ø'		LCONY AREA=	205 S.F. 991 S.F.	52 S.F. 694 S.F.	52 SF. 694 SF.	52 S.F. 694 S.F.	52 S.F. 694 S.F.	50 S.F. 692 S.F.	155 s 960
Produces Performance	2ND FLOOR (NOT JAN, B)	ALCONY & TRASH	11,441 S.F.	SIDE INTERIOR	101	10'-0'		MMON AREA:	55 S.F.	654 S.F.	. 654 S.F.	654 S.F.	054 S.F.	652 S.F.	566
	3RD, FLOOR (NOT JAN, B)	: Alcony 4 trash	11,441 S.F.		±10016			TAL GROSS AREA=							
	4TH FLOOR (NOT JAN, B)	ALCONY & TRASH	11,441 S.F.	HEIGHT CALCULA	1			H. FLOOR LIVING AREA=	786 S.F.	642 S.F.	642 S.F.	642 S.F.	642 S.F.	642 S.F.	805
	5TH FLOOR (NOT SUNDER	CK)			REQUIRED	PROVIDED		LCONY AREA:	205 S.F.	52 S.F.	52 S.F.	52 S.F.	52 SF.	50 SF.	155 9
	(NOT AMENIT	VIDED (1.7	2) 35,006 SF.	MAX, HEIGHT ALLOWED,	10 STORIES OR 140'	44'-1' TOP OF ROOF		AL UNIT AREA=	991 S.F.	694 SF.	694 S.F.	694 S.F.	694 S.F.	692 S.F.	960
2202-2204 VAN BURREN STREET, 1-4 HOLLYWOOD,	F.A.R. ALLO	OWED (1.7	5) 35,861,8 SF.			/	co	MMON AREA=							
FLORIDA 33020			ECTRIC VEHICLE	LAND, USE DESIGNATION: R	AC		TOT	TAL GROSS AREA=							
NORTH	SEE ORDI	NANCE 020		ZONING DESIGNATION: DH-2	2		5T⊢	I. ROOF DECK							1
			BE IN COMPLIANCE WITH VEVELOPMENT	NOTE: 1. ALL CHANGES TO THE DE	SIGN WILL RE	OUIRE	co	MMON AREA=							
1 LOCATION PLAN		PROVIDE	HIGH ALBEDO	PLANNING REVIEW & MAY B APPROVAL.			TOT	AL GROSS AREA:							
1. WORK PERFORMED SHALL COMPLY WITH THE FLORIDA BUILDING CODE	URBAN HE	AT ISLAND		2. THE MAX LIP AT GROUND											
2020, (6TH EDITION), FLORIDA FIRE PREVENTION CODE 2020-6TH, EDITION AND ALL APPLICABLE STATE AND LOCAL CODES, ORDINANCES	PROPERT	Y LINES (MA	DLE LEVEL AT ALL XXIMUM Ø5 IF ADJACENT	LIP GREATER THAN 1/4" WIL A.D.A. REQUIREMENT.	L BE BEVELI	ED TO MEET	5	BUILDING	CALC	CULA	TION				
AND REGULATIONS.	TO RESIDI	ECTIONAL A		3. REFER TO DETAIL 2 ON 8 CAR LIFTS, WE ARE USING A											
2. THE GENERAL NOTES AND SPECIFICATIONS SHALL TAKE PRECEDENCE OVER THE GENERAL CONDITIONS IN CASE OF CONFLICT.	ILIØ AND E	BROWARD A	EPENDING PER NFPA 1, MENDMENT 118.2 IAY TO PROVIDE	CONFIGURATION WHICH REQ				REEN BUILDING PRACTICE 116 PROJECT REQUIRES A (- A	
3. ON SITE VERIFICATION OF ALL DIMENSIONS AND CONDITIONS SHALL BE	NATURAL	LIGHT INTO	COMMON AREAS.	4. ALL STREETS & ALLEYS , (MONROE STREET, NORTH A	ADJACENT TO	O SITE I ALLEY) TO BE	CE	ERTIFCATION THROUGH THE					110010110		
THE RESPONSIBILITY OF THE CONTRACTOR NOTED DIMENSIONS SHALL	8. WHITE RO		BTALLED AS SHOWN ECT LIGHT.	MILLED & RESURFACED (FC LENGTH OF PROPERTY),			NC	OTE:							
TAKE PRECEDENCE OVER SCALED DIMENSIONS.				5. LIFTS ARE DESIGNATED "	O EACH 2-B	EDROOM UNIT		THERE WILL NOT BE ANY S							
4. THE GENERAL NOTES AND DETAILS APPLY THROUGHOUT THE JOB UNLESS OTHERWISE NOTED OR SHOUN. ALL WORK THAT IS EITHER							2. AL	APPLICANT TO MAINTAIN SIGH LLEY EDGE OF PAVEMENT FRO	IT VISIBILITY M THE BUILD	AT ALL TIME DING TO VAN	BUREN STRE	EA BETWEEN ET EDGE OF	PAVEMENT.	G AND THE	
IMPLIED OR REAGONABLY INFERABLE FROM THE CONTRACT DOCUMENTS SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR, THE CONTRACTOR															
IS RESPONSIBLE FOR FAMILIARIZING HIMSELF WITH EXISTING CONDITIONS.	4 5	TE D	ATA				6	NOTES							
5. TURNKEY FINISHED SPACE TO THE OWNER ANY AND ALL DISCREPANCIES AND/OR OMISSIONS SHALL BE REPORTED TO THE															
OWNER'S ARCHITECT PRIOR TO COMMENCEMENT, ANY WORK THAT															
PROCEED'S OTHERWISE SHALL BE REPLACED OR REPAIRED BY THE CONTRACTOR.				PROPOSED 6' LANDSCAPE HIGH PVC FENCE											
6, ALL PERMITS, INSPECTIONS, AND APPROVALS, SHALL BE APPLIED FOR					\backslash						17Ø'-Ø				
AND PAID BY THE CONTRACTOR FOR ALL DISCIPLINES OF THE WORK. THE CONTRACTOR IS RESPONSIBLE FOR ALL COORDINATION OF INSPECTIONS.			E		\uparrow						110-0	, 			
			0	┝╾╌┼╾┼──┼──┼╌┼ <u>═</u> ┟╌ _╛		<u> </u>	0 - 0			2	PERTY LINE				
1. ALL COMPLETED WORK SHALL BE PROTECTED AT ALL TIMES AS THE CONTRACTOR IS RESPONSIBLE FOR THE FULL REPLACEMENT COST OF			퉛췾	₽¥ ₹		ļ ≓		LINE OF BALCONY BALCONY BALCONY ABOVE					ONY E		
ALL DAMAGED WORK CAUSED BY HIS OPERATIONS, CONTRACTORS SHALL FOLLOW ALL ACCEPTED METHODS OF SAFETY PRACTICE AS MAY			X, PHICK	<u> </u>	_		-		_ _	_ ,	÷==		╤╋╅		
BE NEEDED TO PROTECT LIFE AND PROPERTY.				└──┼──┼─╆╇╾╫╍╍╼			╼╼┶┊	4	·	·	-4 		_₿┹╼╼		·
8. BEFORE COMMENCEMENT OF THE WORK, THE CONTRACTOR 6HALL FILE WITH THE OWNER'S CURRENT INSURANCE CERTIFICATION FOR WORKMAN			20			3	4	§ 5 6 (9	6	(1)	(12)	(3)	(
COMPENSATION, COMPREHENSIVE GENERAL LIABILITY, BODILY INJURY															
AND PROPERTY DAMAGE. THE CONTRACTOR SHALL INDEMNIFY THE LANDLORD, OUNER, AND ARCHITECT FOR ANT AND ALL COSTS, CLAIMS,			WARNINGS												
SUITS AND JUDGMENTS FOR PROPERTY DAMAGE AND PERSONAL INJURY, ARISING OUT OF WORK OF THE CONTRACTOR.			FROPOSED 12'x12' SITE VISIBILITY TRIANGLE	21'-0' PARKING BETBACK 9'-0	8'-6'	8-6	8'-6' 1	a 8'-6' 8'-6' 8'	<u>6. 14 8-</u>	6 8-6	5' 8'-6'	8'-8'	1 4 8'-6'	8'-6'	
9, ALL MATERIALS USED SHALL BE NEW AND DELIVERED TO THE JOG IN			100												
ORIGINAL SEALED CONTAINERS BEARING ORIGINAL MANUFACTURER'S			NEW B" CONCRETE SIDEWALK FLUSH, FLUSH TO CONNECT					. +							
LABELS, ALL WORK SHALL BE PERFORMED IN A FIRST CLASS WORKMANLIKE MANNER, MATCHING AND ALIGNING ALL SURFACED WHERE								336							
APPLICABLE TO AFFORD A FINISHED, NEAT APPEARANCE. CONTRACTOR SHALL CLEAN ALL SURFACES FREE OF ALL DIRT OR REFUSE CAUSED BY			FLUGH						NOTE: ALL LIFT S FOR THE S	HALL BE					
DEBRIG FROM ALL INSTALLATION TECHNIQUES OF THE TRADES, ALL ADJACENT SURFACES SHALL BE LEFT AS THEY APPEAR PRIOR TO		ш	PROPOSED 12'x12'	21'-0' PARKING SETBACK	18'-0'	22	'-Ø'	8'-6' 12'-0'	0F NDIVD	UAL UNITS		8'-0'		22'- 0'	
COMMENCEMENT OR REFINISHED AS REQUIRED TO LIKE-NEW CONDITION,		1 AF					-				*		-+		+-
10. THE CONTRACTOR SHALL GUARANTEE IN WRITING, IN FORM		N N			819 L#T #	e					333	4) L⊫T 1	-9 10		e
ACCEPTABLE TO THE OUNER, ALL LABOR AND MATERIAL INSTALLED BY HIM FOR A PERIOD OF NNOT LESS THAN ONE YEAR AFTER DATE OF FINAL		l a	WARNINGS	iş l	13-CA			6			IU	(3-CA			
ACCEPTANCE. SHOULD DEFECTS OCCUR, ALL WORK SHALL BE REPLACED OR PROPERLY REPAIRED AT NO ADDITIONAL COSTS TO THE OWNER		NA V						<u>i</u> 30 (3)		32		REG			
SUBSTANTIAL COMPLETION SHALL BE ATTAINED WHEN ALL PHASES OF		ĺ ĺ			Ø21 L⊯T 9 9	9 60		<u> </u>		Ą	353	إف [™] (6) الأن	9 1		8-F
THE WORK ARE COMPLETED AND THE SPACE CAN BE USED FOR WHAT IS INTENDED (EXCLUDING PUNCH LIST ITEMS).					<u>+</u> -	∔ - ♠				_ <u>_</u>	 ⊐1 ¦₀		-+		+-
11, ALL WORK AND/OR MATERIALS SHALL BE INSTALLED IN STRICT			ĔŖ -	15-0 5-0 6	2223 LIFT 🖁			ROLL-UP GATE	+	J garbage DUMPSTER	972	B) L⊫T III	-9- -8		- 9- 10
ACCORDANCE WITH MANUFACTURER'S OR INDUSTRY'S RECOMMENDATIONS OR STANDARDS.			STRUCK		<u>12-CA</u>	↓ ↓				rincycle		13-04			-∔-
12. CONTRACTORS SHALL BE FULLY RESPONSIBLE FOR THE					94)25) ∟⊯⊺ ģ	ې				ELEY.	39(4	o) ∟⊫⊤io	ې		Ģ

2425 LIFT 9

26

STEEL POST

PROPOSED FIRE ACCESS GATE PROPOSED 6' HIGH PVC FENCE

ö

38'-6' PAVERS

LINE OF BALCONY ABOVE

۶ð

AP

LAND8 AREA 15'-2

28

-----1

ELEV. 55 SF.

81419 F

PROPERTY LINE

205.0

165'-

up

3940 LIFT 9

BIKE STORAGE

12. CONTRACTORS SHALL BE FULLY RESPONSIBLE FOR THE
COORDINATION OF ALL THE WORK OF HIS TRADES PLUS THE
COORDINATION, REPAIR AND PREPARATION FOR THE WORK OF ANY
OTHER TRADES THAT WILL BE SUBSEQUENTLY LET UNDER SEPARATE

13. SURVEYOR TO LAY OUT ADDITION TO CONFIRM CONFORMANCE WITH SETBACKS BEFORE CONSTRUCTION STARTS.

2 GENERAL NOTES

3 LEGAL DESCRIPTION

CONTRACT BY THE OWNER.


LOT 22, BLOCK 5 OF HOLLYWOOD LITTLE RANCHES, ACCORDING TO THE PLAT THEREOF, AS RECORDED IN PLAT BOOK 1, PAGE 26, OF THE PUBLIC RECORDS OF BROWARD COUNTY, FLORIDA.

PROPOSED SITE PLAN T

 $\sqrt{2}$


NORTH


952 SF. 1,018 SF. 9,956 SF. 232 SF. 1,174 SF. 1,250 SF. 11,130 SF. 1,578 SF. 12,708 SF.		652 S.F.				
232 SF. 1,174 SF. 1,250 SF. 11,130 SF. 1,578 SF.		(E2 6 E				
1,250 S.F. 11,130 S.F. 1,578 S.F.	54 SE 232 SE	652 S.F.	652 S.F.	726 S.F.	992 S.F.	463 S.F.
1,578 SF.		54 S.F.	54 S.F.	54 S.F.	54 S.F.	54 S.F.
	Ø6 S.F. 1,25Ø S.F.	706 SF.	706 S.F.	78Ø S.F.	1,046 S.F.	517 S.F.
12709 65						
12,100 5.F.						
1,018 S.F. 9,956 S.F	552 S.F. 1,018 S.F.	652 S.F.	652 S.F.	726 S.F.	992 S.F.	463 S.F.
232 S.F. 1,174 S.F.	54 S.F. 232 S.F.	54 S.F.	54 S.F.	54 S.F.	54 S.F.	54 S.F.
1,250 S.F. 11,130 S.F.	Ø6 S.F. 1,25Ø S.F.	706 S.F.	706 S.F.	78Ø S.F.	1,046 S.F.	517 S.F.
1,578 S.F.						
12,708 S.F.						
1,018 S.F. 9,956 S.F	552 S.F. 1,018 S.F.	652 S.F.	652 S.F.	726 S.F.	992 S.F.	463 S.F.
232 S.F. 1,174 S.F.	54 S.F. 232 S.F.	54 S.F.	54 S.F.	54 S.F.	54 S.F.	54 S.F.
1,250 S.F. 11,130 S.F.	Ø6 S.F. 1,25Ø S.F.	706 SF.	706 S.F.	78Ø S.F.	1,046 S.F.	517 S.F.
1,578 S.F.						
12,708 S.F.						
12,108 5.						
7 <i>,000</i> S.F						

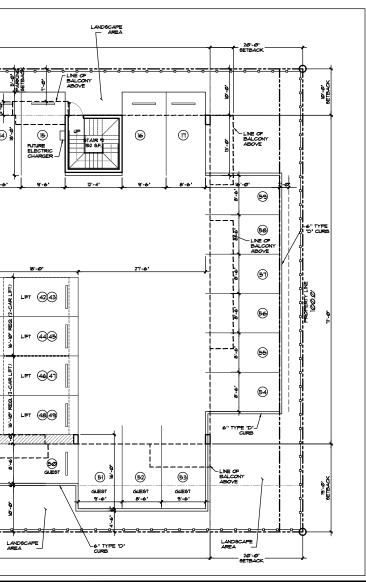






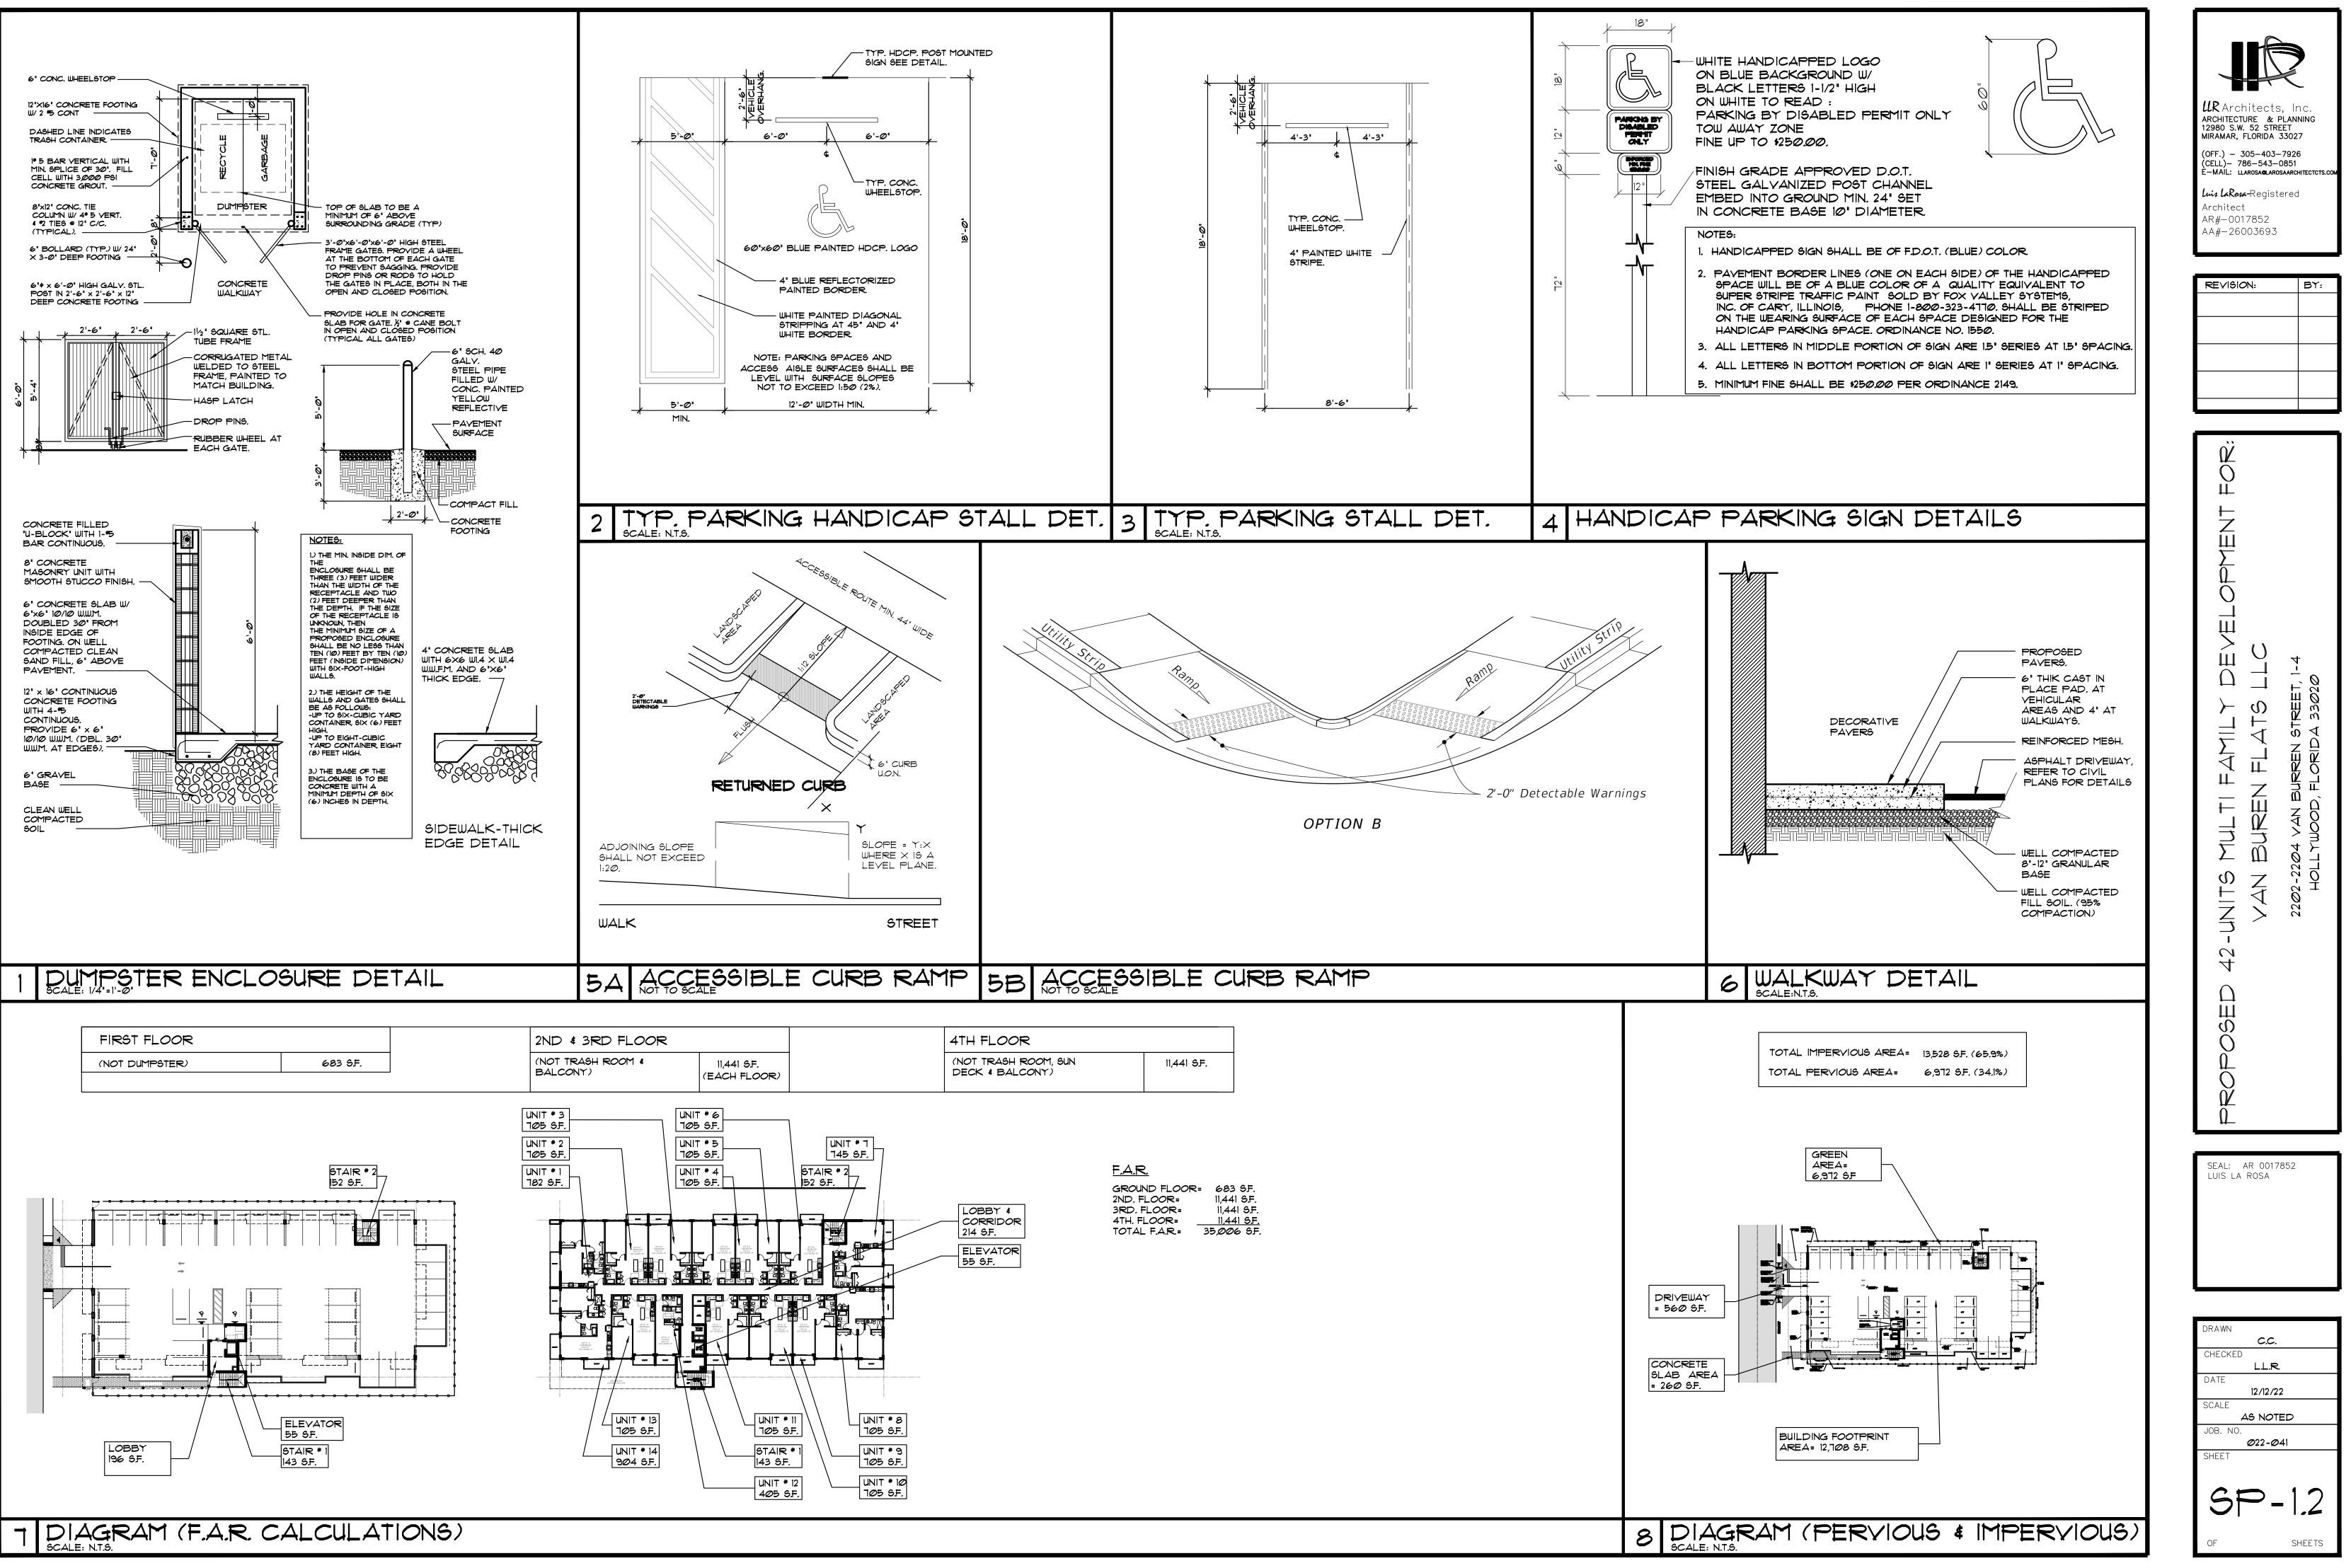


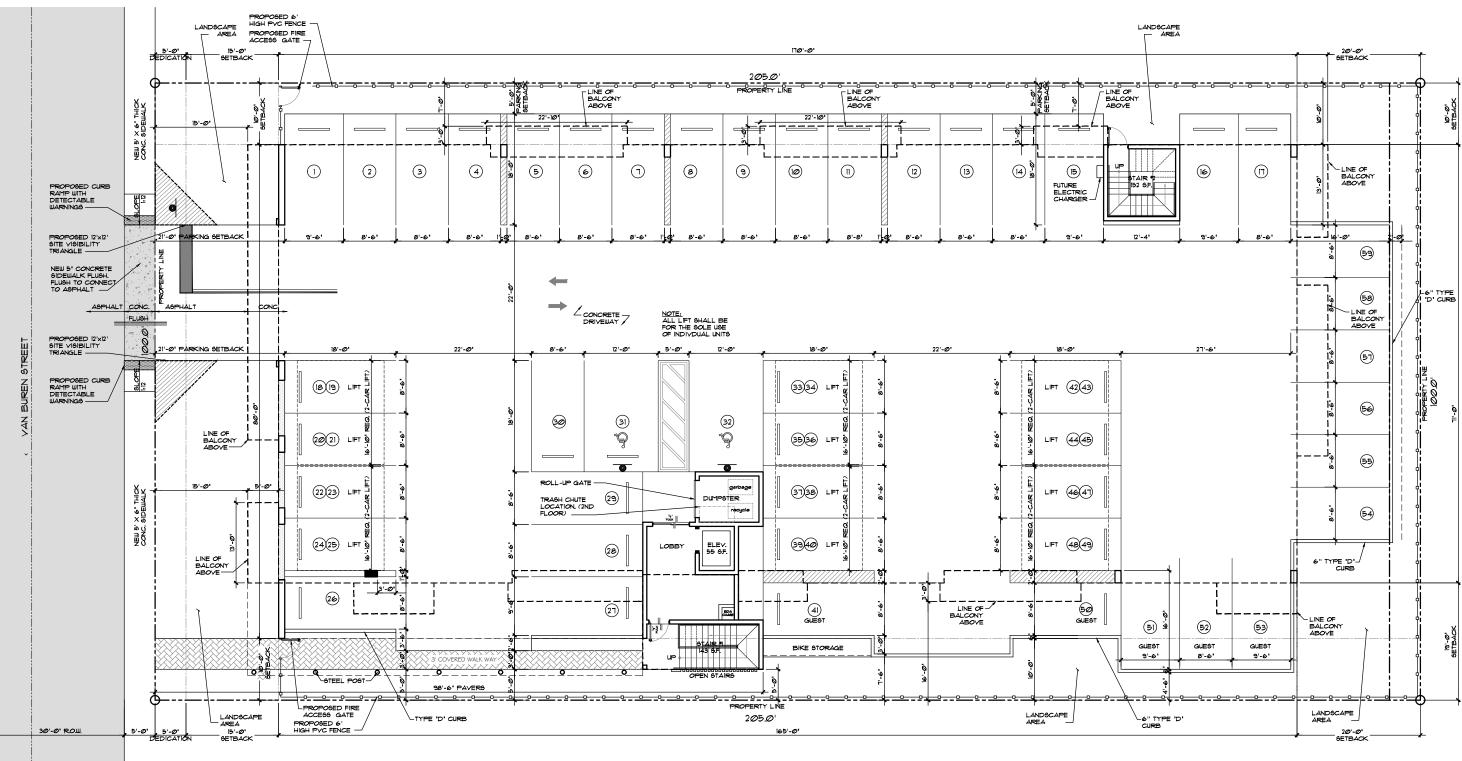

NORTH

PROPOSED FIRST FLOOR PLAN

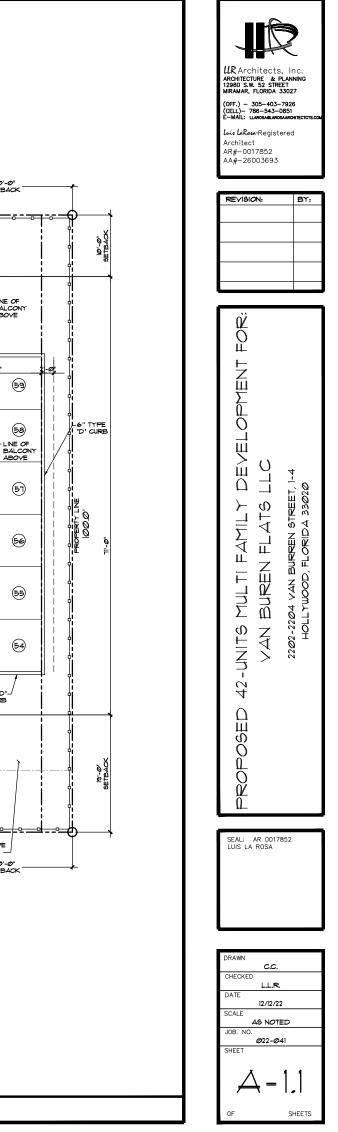


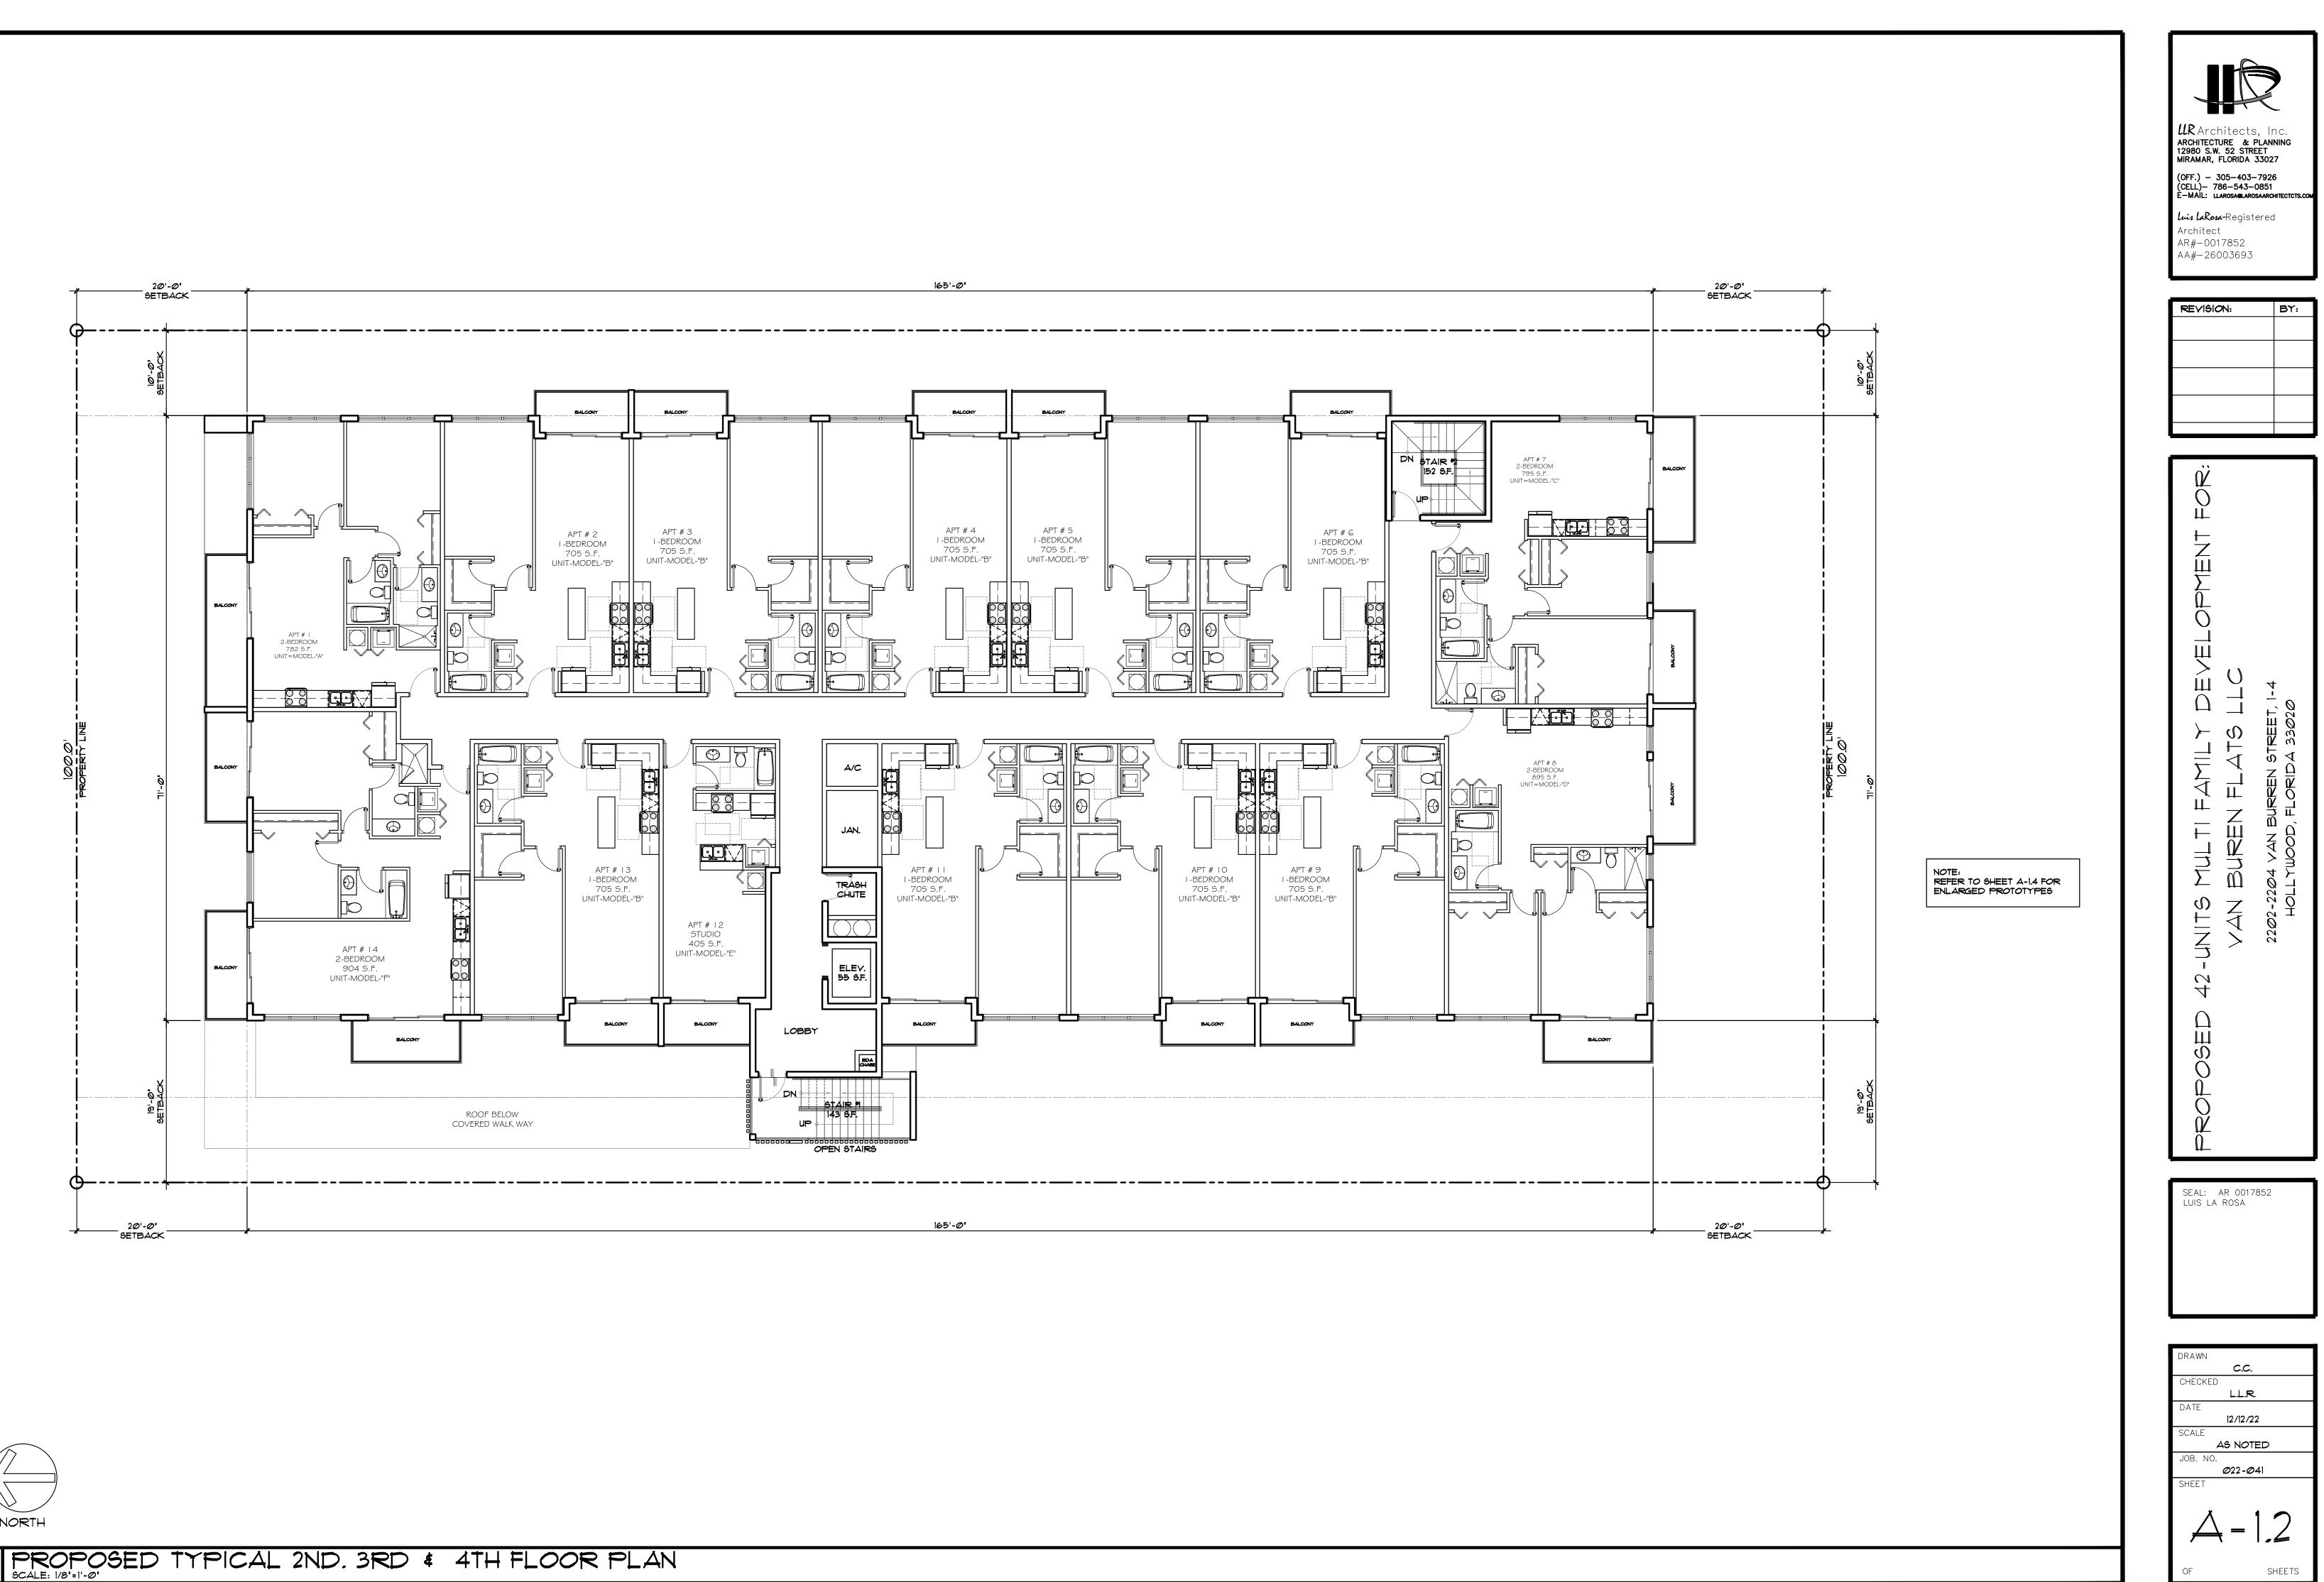


NORTH





NORTH

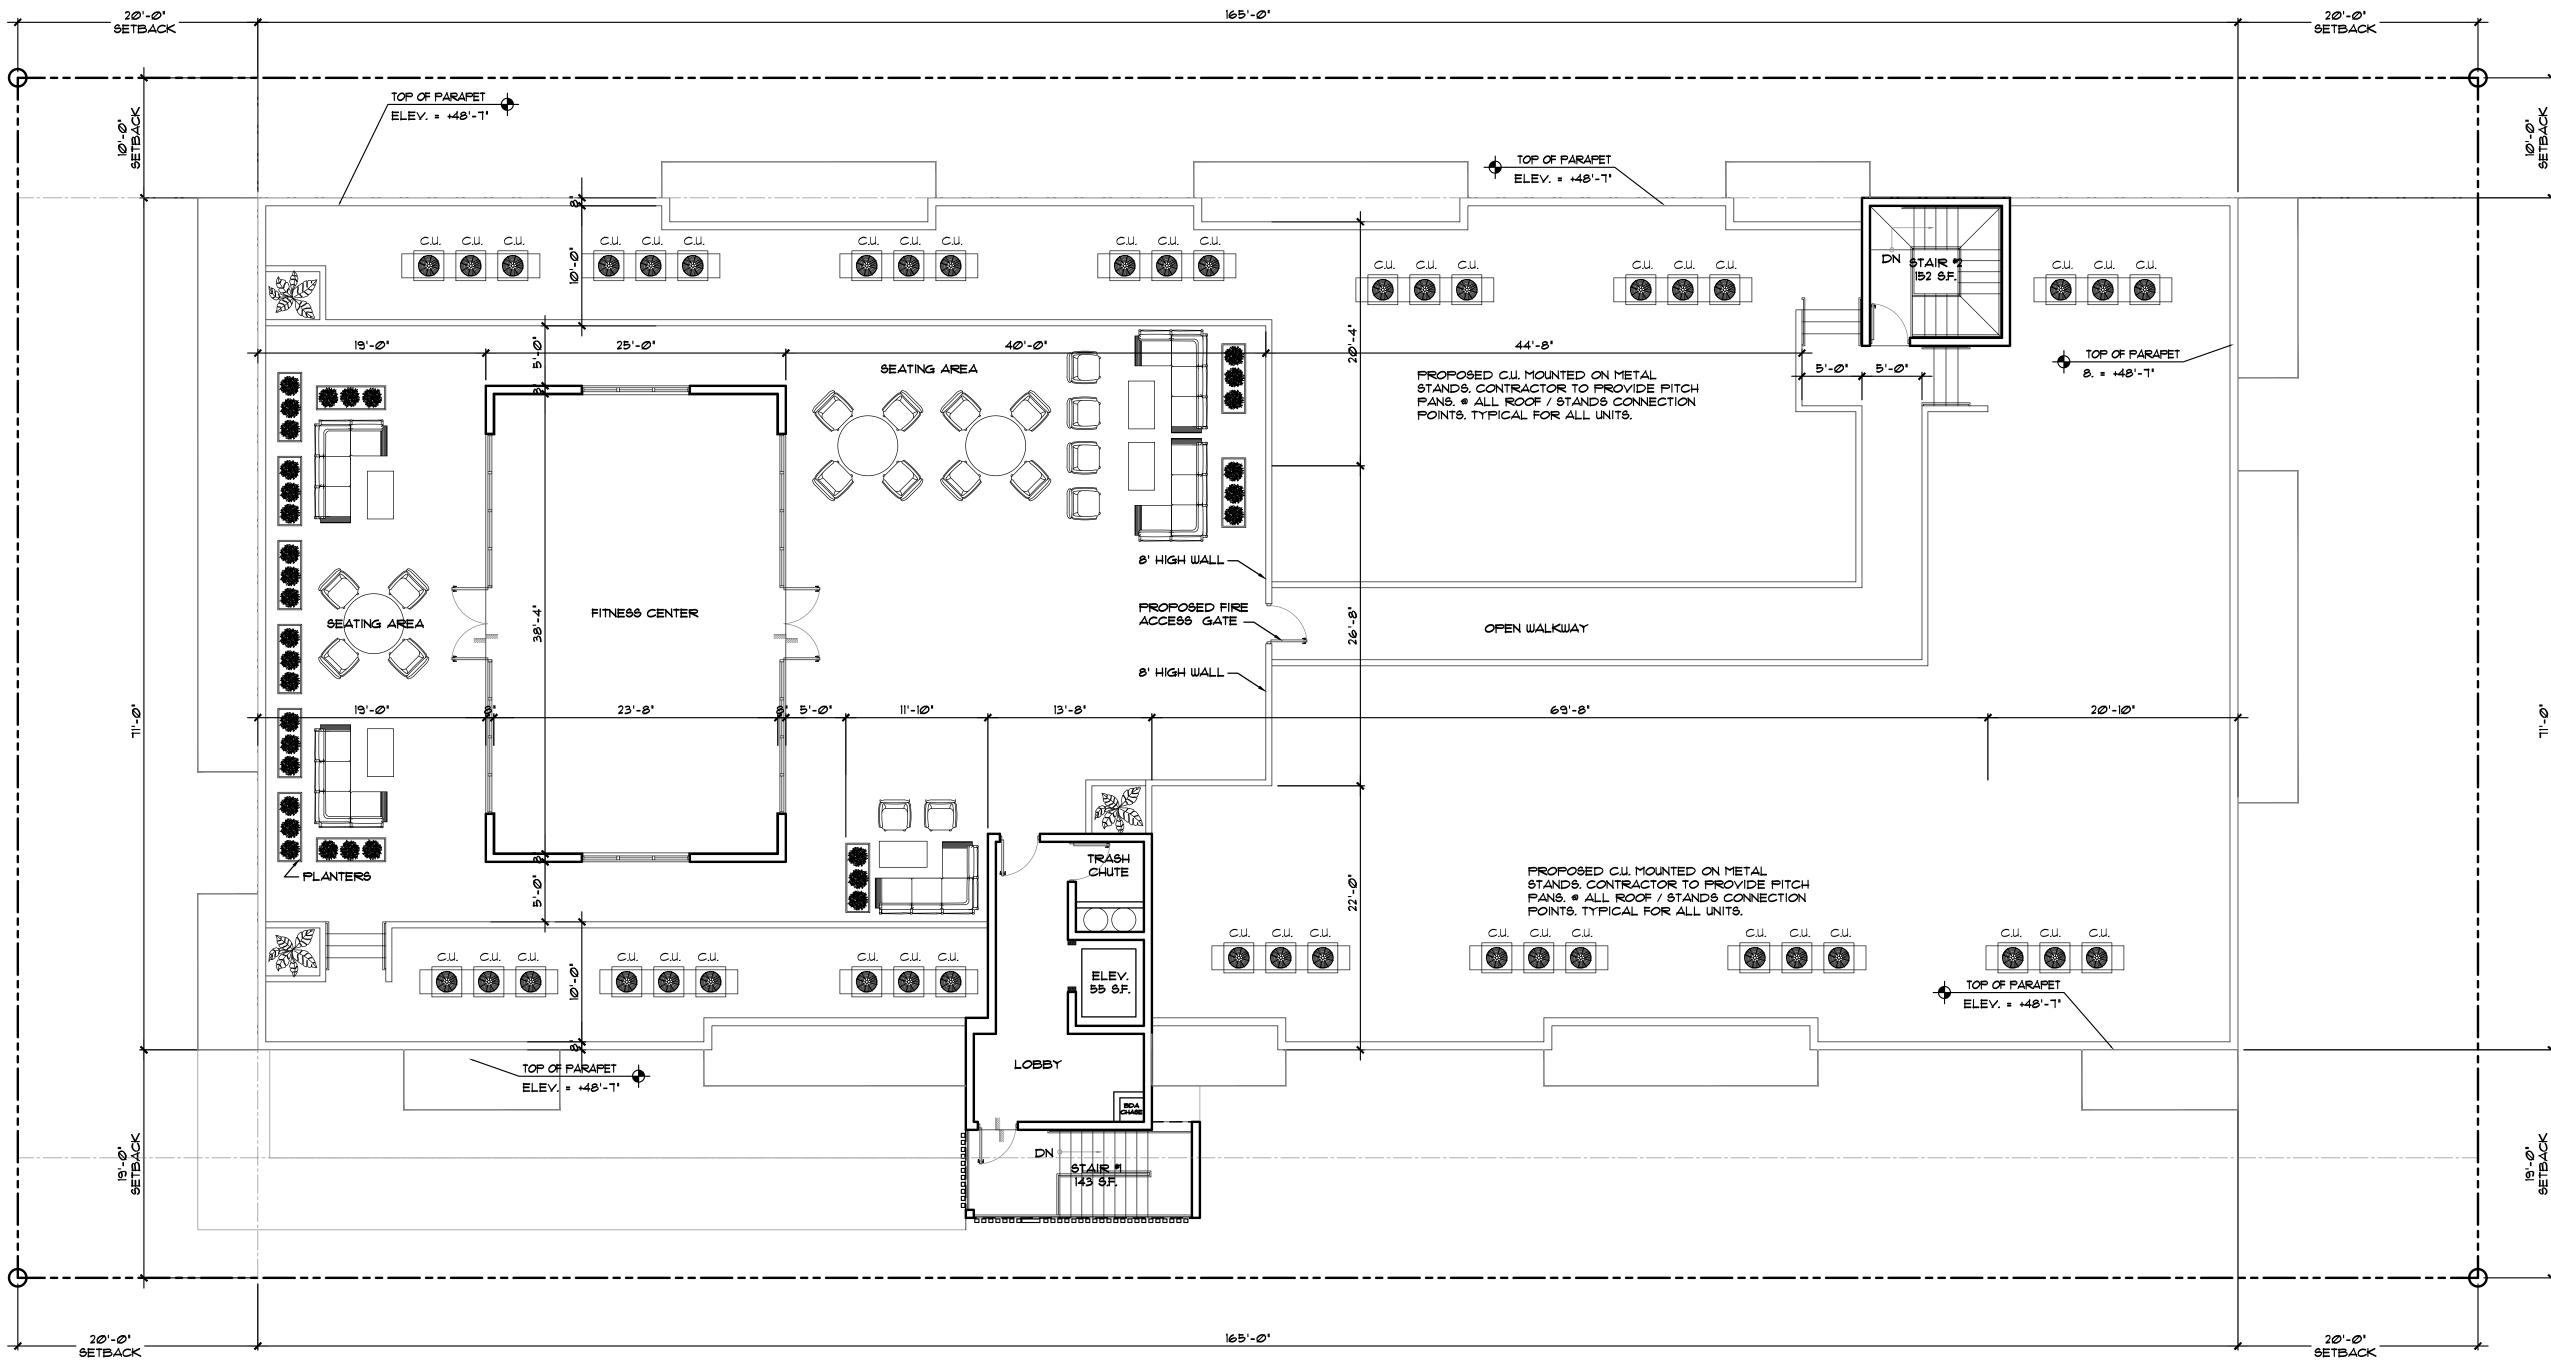

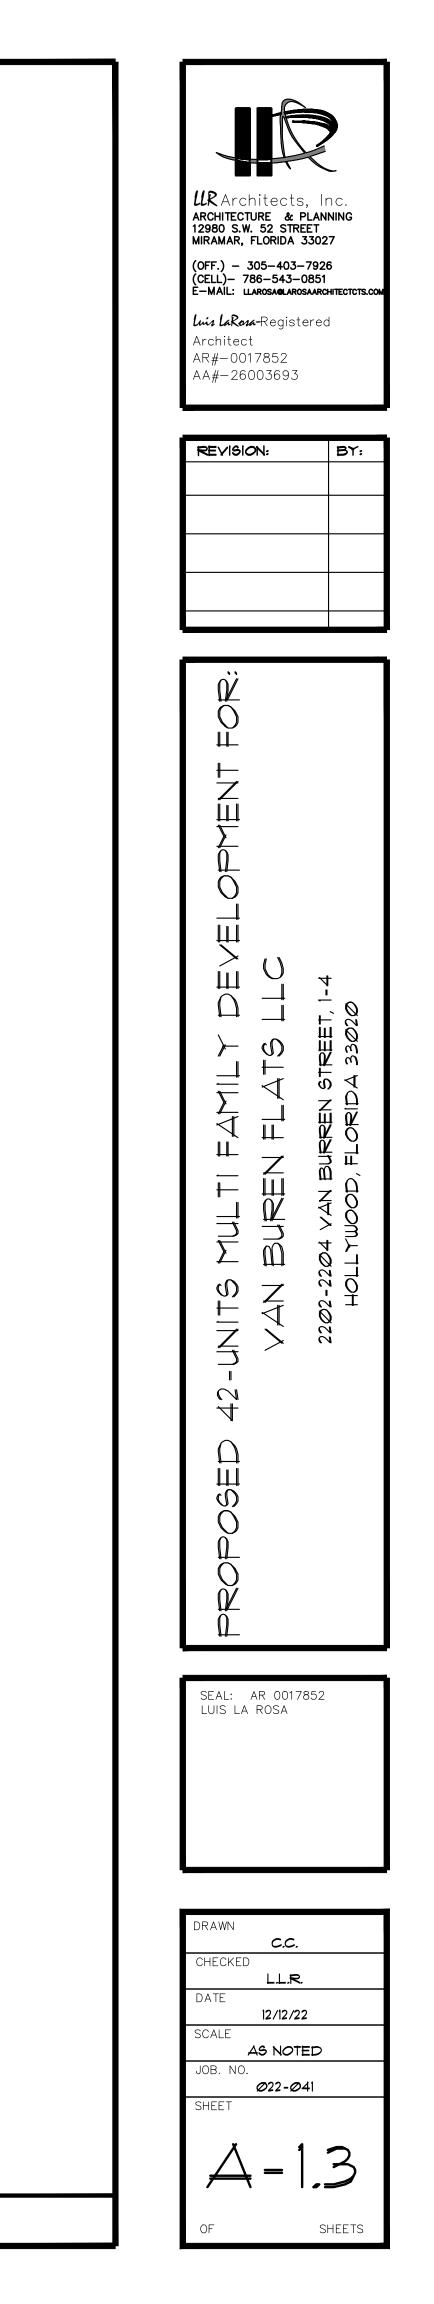




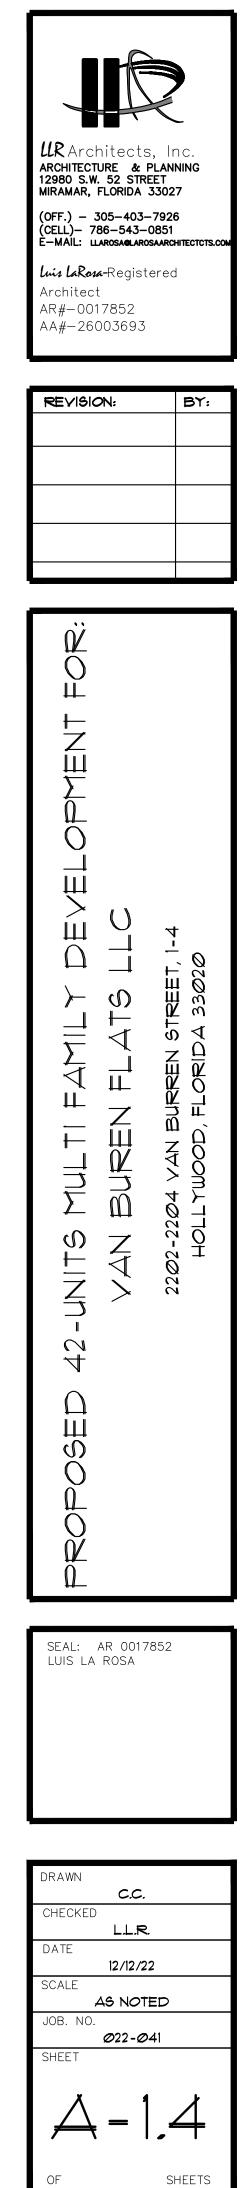

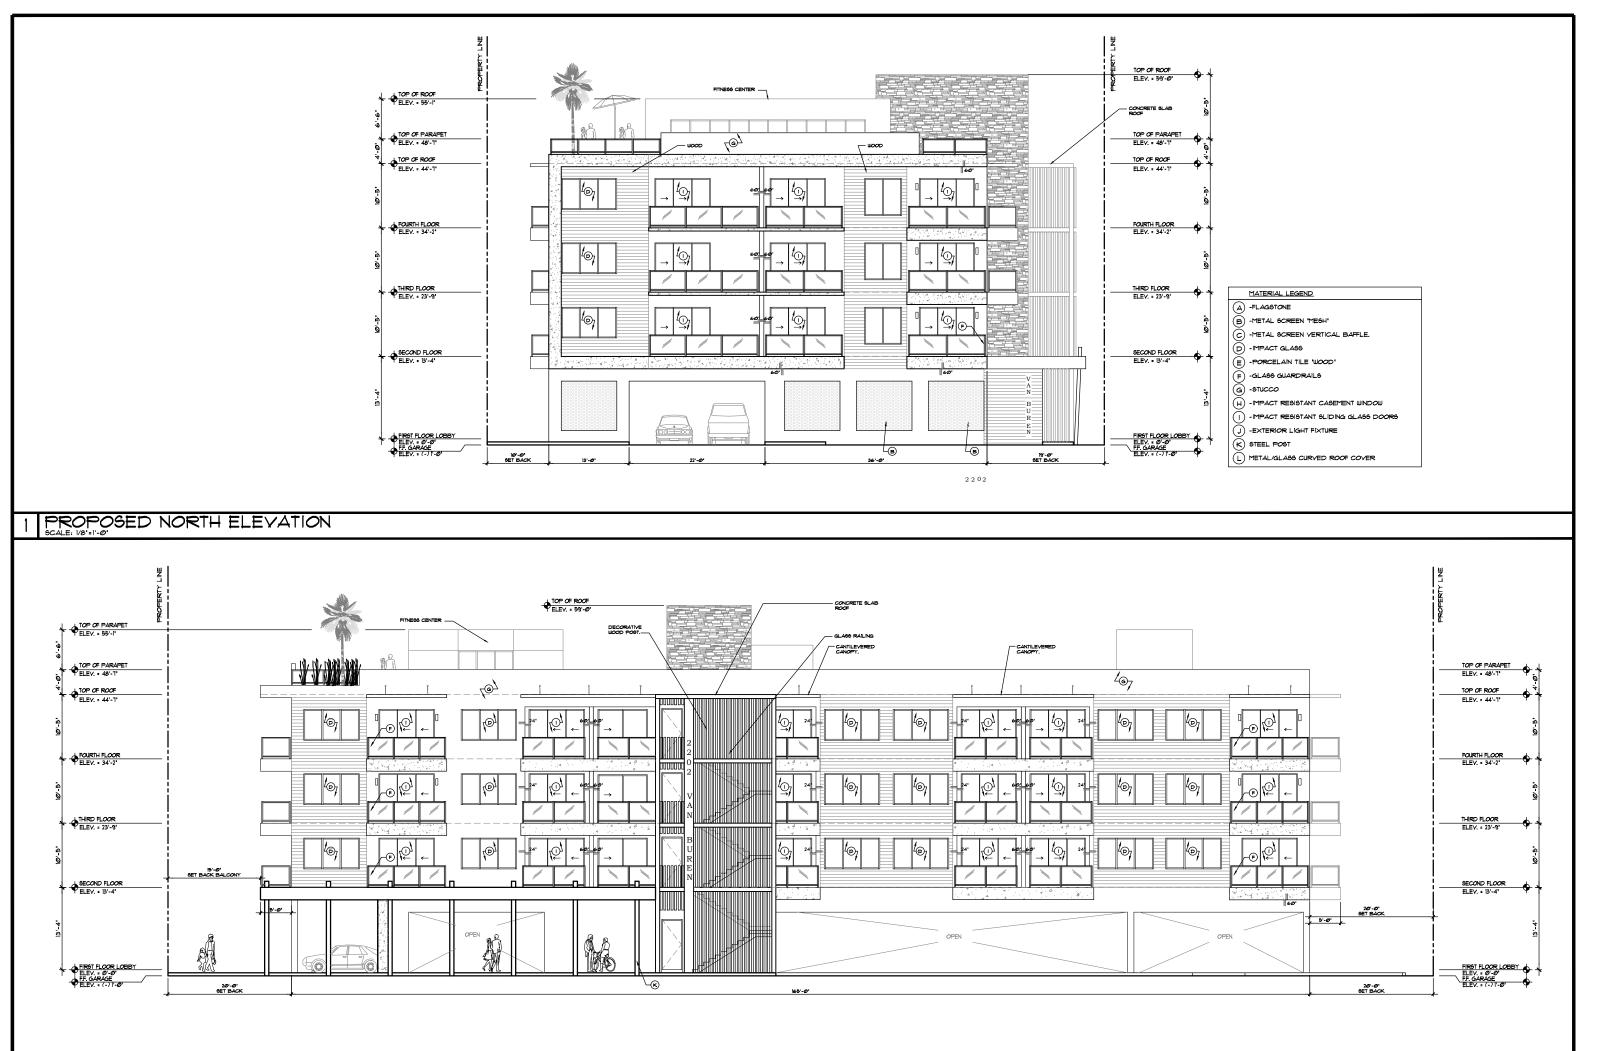






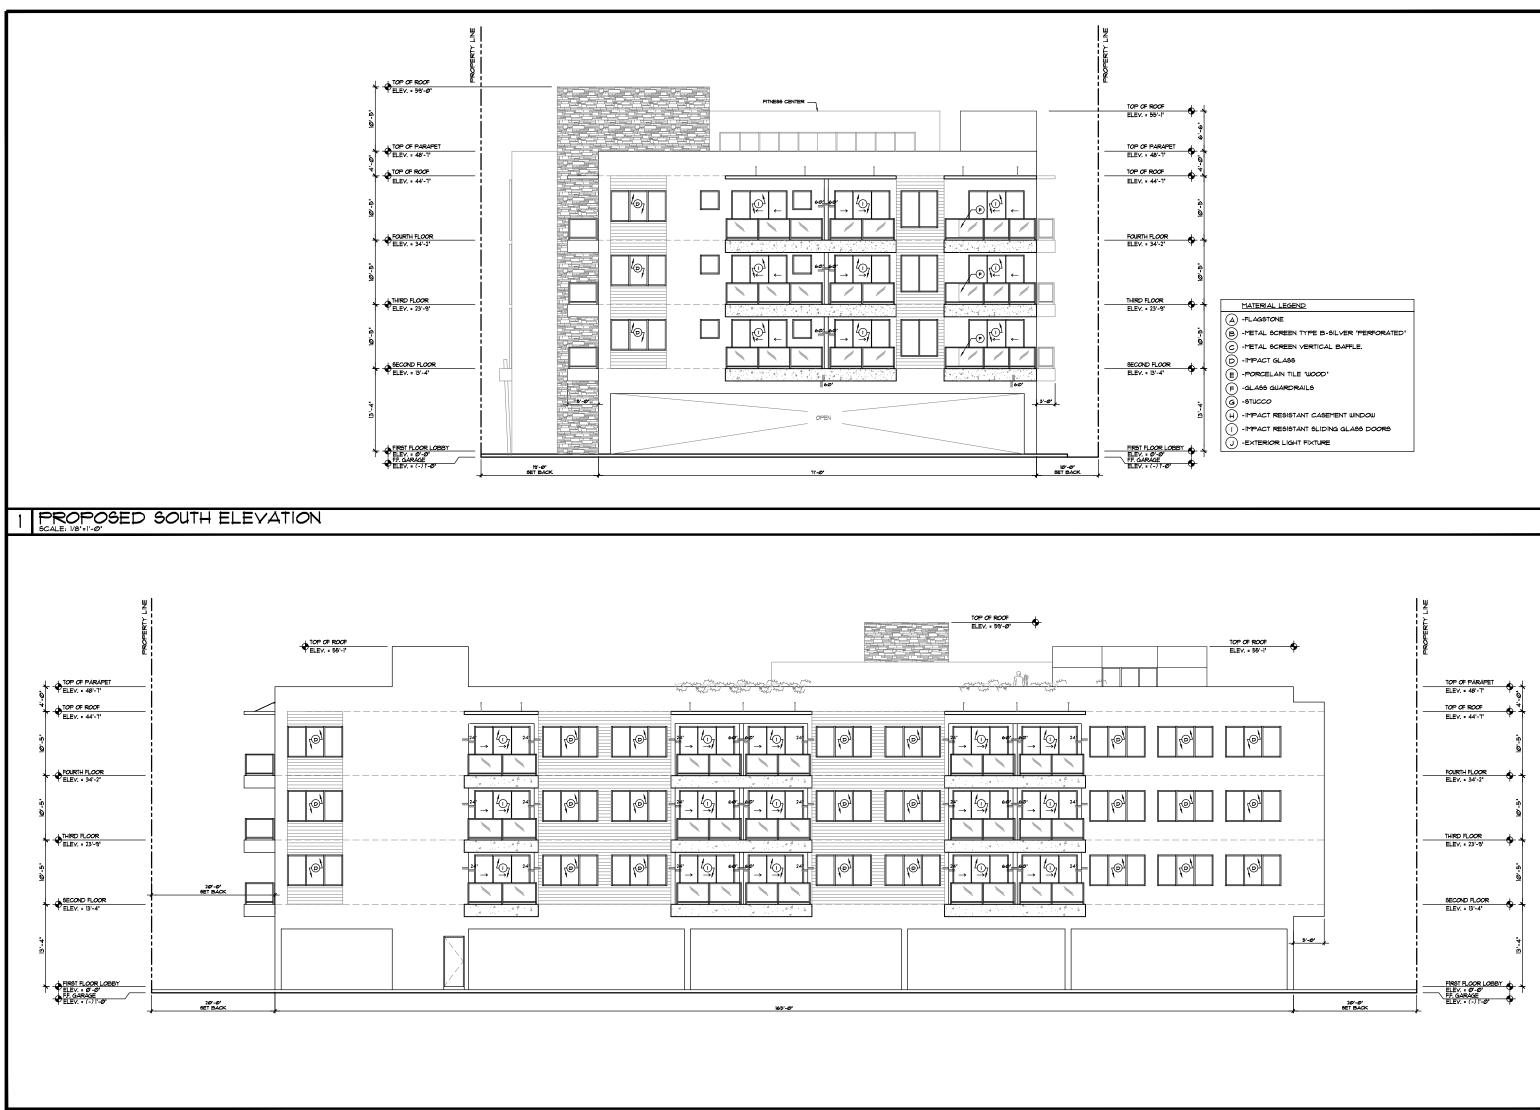

LLR Arct ARCHITECT 12980 SW MIRAMAR. (OFF.) - 3 (CELL) - 7 E-MAIL: U Luis LRoss Architect AR#-001 AA#-260	805–403– 86–543– AROSAGLARO «-Regist	-7926 0851 Isaarci	5 Hitectcts.com
REVISIO	DN:		BY:
ŝ			
PROPOSED 42-UNITS MULTI FAMILY DEVELOPMENT	VAN BUREN FLATS LLC	22002-22004 VAN BURREN STRFET 1-4	DD, FLORIDA 33020
SEAL: LUIS LA	AR 0017 ROSA	852	
00111			
DRAWN CHECKED	с.с.		
DATE	LLR		
	12/12/2	2	
SCALE	45 NOT	En	

= 2.2

Д

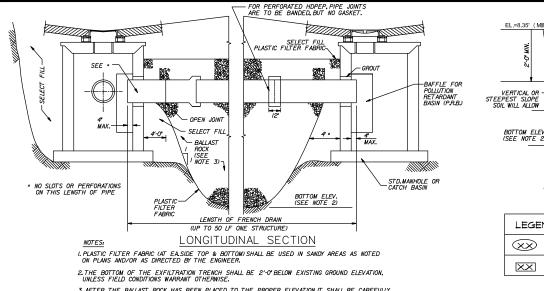

3. AFTER THE BALLAST ROCK HAS BEEN PLACED TO THE PROPER ELEVATION.IT SHALL BE CAREFULLY WASHED DOWN WITH CLEAN WATER IN ORDER TO ALLOW FOR INITIAL SETTLEMENT THAT MAY OCCUR. IF IT DOES TAKE PLACE.ADDITIONAL BALLAST ROCK WILL BE ADDED TO RESTORE THE BALLAST ROCK TO THE PROPER ELEVATION,SO THAT THE EXFLITRATION TRENCH BE COMPLETED IN ACCORDANCE WITH THE DETALS.

4. INVERT ELEVATION TO BE ABOVE AVERAGE OCTOBER GROUND WATER LEVEL OF 15' NAVD PER BROWARD COUNTY'S FUTURE CONDITIONS AVERAGE WET SEASON GROUNDWATER ELEVATION MAP

5. PLUG STUB PIPES WITH *10-1'x1" GALV. STEEL MESH OR ALUM.WIRE MESH (OVER END OF PIPE)

-OVERLAP I' MIN. WATER & SEWER DEMAND

42 UNITS × 250 GPD/UNIT= 10,500 GPD

FIRE NOTES

EL.=7.35' (MIN.)

AVG. WET SEASON GROUND WATER

ATION =1.5

PLASTIC FILTER FABRIC

- PLASTIC FILTER FABRIC

SELECT FILL

4"-0"

XX DENOTES EXISTING GRADE

XX DENOTES PROPOSED GRADE

TRANSVERSE SECTION

LEGEND: (note all values are N.A.V.D.88)

EL =8.35' (MIN

BOTTOM ELEV.-(SEE NOTE 2)

鼮

1), UNDERGROUND FIRE MAIN WORK WILL BE COMPLETED BY A CONTRACTOR HOLDING A CLASS 1, 11 OR V LICENSE AS PER 18 633.102

2), NO FIRE PUMP IS REQUIRED

3). PER NFPA I, 12.3.2" A QUALITY ASSURANCE PROGRAM FOR THE INSTALLATION OF DEVICES AND SYSTEMS INSTALLED TO PROTECT PENETRATION AND JOINTS SHALL BE PREPARED AND MONITORED BY THE REGISTERED DESIGN PROFESSIONAL RESPONSIBLE FOR DESIGN, INSPECTIONS OF FIRE STOP SYSTEMS AND FIRE-RESISTIVE JOINT SYSTEMS SHALL BE IN ACCORDANCE WITH 12.3.2.1 AND 12.3.2.1.

FIRE FLOW CALCUALTION: CODE: F.F.P.C. 2017 EDITION & NEPA 220

BUILDING TYPE:-


TOTAL AREA: 33,000 SF. TYPE OF OCCUPANCY: APARTMENT BUILDING AS PERSECTION 18.4.5.2. FOR NON-ONE & TWO-FAMILY DWELLING


TABLE 18.4.5.1.2 - 48,301-59,000 S.F.= 2,500 GPM FOR A DURATION OF 2 HOURS A REDUCTION OF 15% SHALL BE PERMITTED TO BE APPLIED MIN. FLOW: 1,000 GPM STANDARD SPRINKLERS OR 600 GPM QUICK RESPONSE

1,500 GPM X .25= 375 GPM (USE MINIMUM FOR QUICK RESPONSE- 600 GPM @20PSI)

FLOW TEST RESULTS: STATIC= PSI RESIDUAL = PSI

TOTAL FLOW= 1,060 + 920 GPM= 1,980 GPM

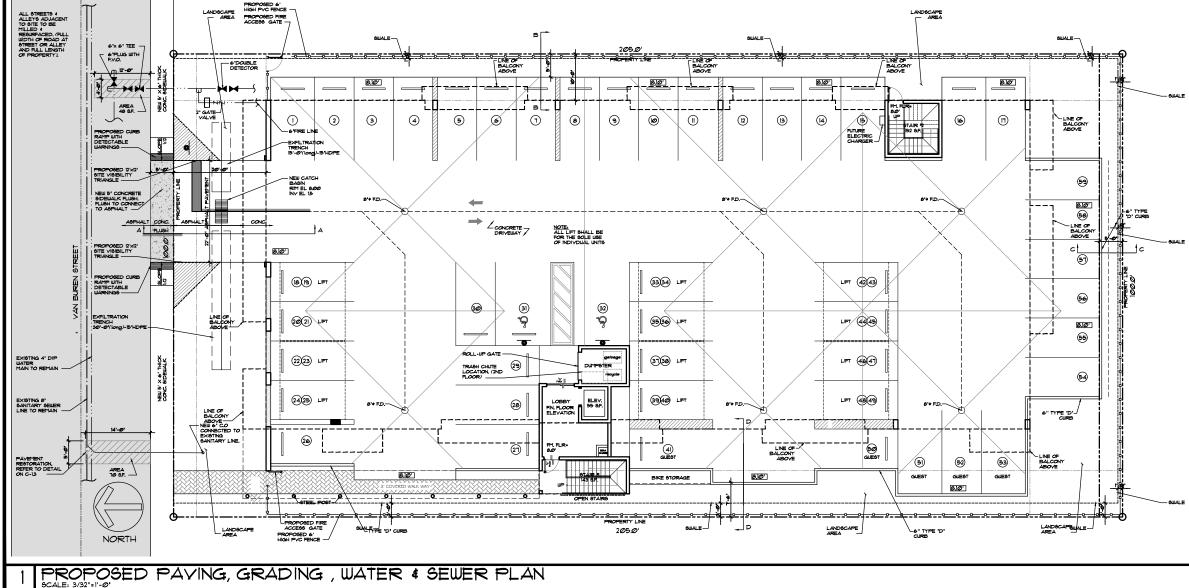

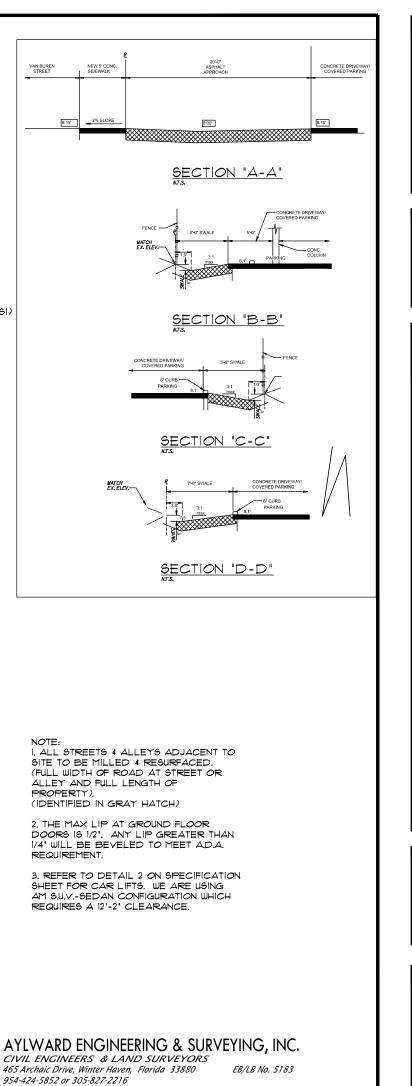

LLR Architects ARCHITECTURE & F. 12980 S.W. 52 STR MIRAMAR, FLORIDA 3 (OFF.) - 305-403 CELL) - 786-543-1 E-MAIL: LLANDSRAUND Luis LROSA-Regist ArgH-0017852 AA#-26003693 REVISION:	PLANNING EET 33027 -7926 0851 saarchitectcts.com
FROPOSED 42-UNITS MULTI FAMILY DEVELOPMENT FOR: VAN BUREN FLATS LLC	2202-2204 VAN BURREN STREET, 1-4 HOLLYWOOD, FLORIDA 33020
SEAL: AR 0017 LUIS LA ROSA	852
DRAWN CHECKED DATE I2/12/2: SCALE AS NOTI JOB. NO. 022-00 SHEET	2 ED

SHEETS

GENERAL NOTES	-					ſ	GENE	RAL NOTES (CO	ONTINUED):
THE NATURE AND EXT WORK. THE CONTRAC	TENT OF CONDITIONS WHICH TORS ARE DIRECTED, PRIOR	GS IS SOLELY TO ASSIST THE C H WILL BE ENCOUNTERED DU TO BIDDING, TO CONDUCT W	IRING THE CO VHATEVER IN	OURSE OF THE			12. CITY	OF HOLLYWOOD SHA	LL NOT PROVIDE STAGING AS NECESSARY FOR CONS
	NTERED, AND UPON WHICH	N CONCLUSION REGARDING T I BIDS WILL BE BASED.	HE ACTUAL (CONDITIONS					L AWAY EXCESSIVE STOCKI EFT ON THE CONSTRUCTIO
OF THE CITY OF HOLLY	YWOOD DEPARTMENT OF PL	FORM TO APPLICABLE STAND	G AND CONS	TRUCTION			14. CON	TRACTOR SHALL CLEA	N / SWEEP THE ROAD AT I
a	80	L, STATE AND NATIONAL COD	8					TRACTOR SHALL PROT UIRED BY NPDES REGU	TECT CATCH BASINS WITHI JLATIONS.
TIME OF THE PREPAR THERE MAY HAVE BE	ATION OF THESE PLANS; AN EN OTHER IMPROVEMENTS,	CORDING TO THE BEST INFOR ID DO NOT PURPORT TO BE A , UTILITIES, ETC., WITHIN THE ESE PLANS AND/OR THE ORIGI	BSOLUTELY C	CORRECT. ALSO, EA WHICH WERE				STRUCTION BEFORE 8	HAS A NOISE ORDINANCE 3:00 A.M. AND AFTER 6:00
CONTRACTOR SHALL V WORK PRIOR TO CON DRAWINGS AND ACTU	VERIFY THE LOCATIONS, ELE STRUCTION, AND NOTIFY TH JAL CONDITIONS ARE DISCO	VATIONS, AND OTHER FEATU IE ENGINEER IMMEDIATELY W VERED. THE ENGINEER ASSUM	RES AFFECTIN WHEN CONFL MES NO RESP	ng His/Her Ict Between Ponsibility for			INCL	UDE COST IN OTHER I	
AVOID CONFLICT WIT EXISTING UTILITIES SH	H EXISTING UTILITIES (NO A	PLANS. THE CONTRACTOR SH DDITIONAL COST SHALL BE PA VICE DURING CONSTRUCTION	AID FOR THIS	WORK).			NOT	ED ON THE DRAWING	
4. THE CONTRACTOR SH	ALL COORDINATE WITH ALL	UTILITIES TO ARRANGE FOR 1 C. AS NECESSARY TO COMPLET					SIDE	WALKS, ETC. TO SATIS	REPLACE ALL PAVING, STA SFY THE INSTALLATION OF WAS REMOVED DURING C
UTILITIES ON THIS PRO	DJECT, AND TO ENSURE THA	TO LOCATE AND PROTECT AN T EXISTING UTILITIES ARE MA ERWISE BY THE UTILITY OWN	AINTAINED IN				EQU FORI	IPMENT. IN CASE WO M MUST BE SIGNED B	NOT ENCROACH INTO PRIV RK ON PRIVATE PROPERTY Y PROPERTY OWNER AND IBLE TO MAINTAIN ACCES:
	OXES, STORMWATER INLETS	Y CASTINGS INCLUDING VALV 5, AND SIMILAR STRUCTURES					21. THE IRRIC	CONTRACTOR SHALL	BE RESPONSIBLE FOR DAM ATE OR PUBLIC) ACCIDENT REMOVED OR MODIFIED I
	REQUIRED TO OBTAIN ALL A IE START OF CONSTRUCTION	PPLICABLE CONSTRUCTION A	ND ENVIRON	IMENTAL			PERT	INENT APPURTENANC	CES TO MATCH OR EXCEED
		48 HOURS PRIOR TO BEGINNI							OTHER PRIVATE PROPERTY TS SHALL BE REPLACED TO
IMPROVEMENTS, SHO	P DRAWINGS SHALL BE SUB	MITTED TO ECSD IN ACCORD	ANCE WITH T	THE CONTRACT					VIDE MAINTENANCE OF TR ARTMENT OF PUBLIC UTIL
	AGENCY SHOP DRAWING AP ALL NOTIFY ECSD IMMEDIAT	PROVAL, IF REQUIRED. TELY FOR ANY CONFLICT ARIS	ING DURING					REES ARE TO BE REM NEER.	OVED OR RELOCATED WIT
	BE CONSIDERED INCIDENTAL	N ON THESE DRAWINGS. THIS L TO THE CONTRACT AND NO					PERM		PONSIBLE FOR OBTAINING OF HOLLYWOOD BUILDING
11. ELEVATIONS SHOWN 1988 (NAVD 88).	ARE IN FEET AND ARE REFE	RENCED TO THE NORTH AME	RICAN VERTIC	CAL DATUM OF			HAV	ING JURISDICTION. AN	E PLANS TO BE IN ACCORD NY DISCREPANCIES BETWE ENTS SHALL BE IMMEDIATI
ISSUED: 03/01/	1994 DEPARTMENT OF F	PUBLIC UTILITIES STANDA	RD DETAIL	REVISED: 06/08/20	014	-	OF HOLLY WOOD ALLE	ISSUED: 03/01/1994	DEPARTMENT OF PUB
AMOND DRAWN:	EAM	ENERAL NOTES		DRAWING NO.		1	DIAMOND or me GOLD COAST	DRAWN: EAM APPROVED: XXX	GEN (CC
WATER MAIN S	SEPARATION IN ACCO	RDANCE WITH F.A.C. R	1						
OTHER PIPE	HORIZONTAL SEPARATION	CROSSING (1), (4)	@ CI	TSPACING ROSSING NT CENTERED) (8)					OF ROADWAY BASE
STORM SEWER, STORM WATER FORCE MAIN, RECLAIMED WATER (2)		12 inches is the minimum except for storm sewer, then 6 inches is the minimum and 12 inched is preferred	Alternate 3 ft m				PL4 EXCEED 1 LAYER SI	RAL BACKFILL SHALL ICED IN LAYERS NOT 2" IN THICKNESS. E HALL BE COMPACTED MAXIMUM DRY DENS	TO ACH TO
GRAVITY SANITARY SEWER, (3) SANITARY SEWER FORCE MAIN, RECLAIMED WATER	WATER MAIN 3	S WATER MAIN 3 12 inches is the minimum except for gravity sewer, then 6 inches is the minimum and 12 inched is preferred	Alternate 6 ft m				COMPACTED	YERS NOT TO I THICKNESS. BA TR SHALL BE TO 98% OF DRY DENSITY	INITIAL CKFILL
on-site sewage treatment & Disposal system	10 ft minimum		-					BEDDING	
 SEPARATION IS 12 INCHES. RECLAIMED WATER REGUL 3 FT. FOR GRAVITY SANITA TOP OF THE GRAVITY SANITA TOP OF THE GRAVITY SANITA 18" VERTICAL MINIMUM SI A MINIMUM 6 FOOT HORI IN PARALLEL INSTALLATION IN CASES WHERE IT IS NOT IN A SEPARATE TRENCH OR SUCH AN ELEVATION THAT WHERE IT IS NOT POSSIBLE MAIN SHALL BE CONSTRUC MINIMUM VERTICAL DISTA WATER MAIN SHALL BE LO JOINTS). 	ATED UNDER PART III OF CHAPT RY SEWER WHERE THE BOTTOM TARY SEWER. EPARATION REQUIRED BY CITY O ZONTAL SEPARATION SHALL BE IN SWHENEVER POSSIBLE. POSSIBLE TO MAINTAIN A 10 FO CON AN UNDISTURBED EARTH S THE BOTTOM OF THE WATER M TO MAINTAIN A VERTICAL DIST TED OF DIP AND THE SANITARY NOCE OF 6 INCHES. THE WATER IN CATED AS FAR APART AS POSSIBLE	WATER MAIN MUST BE BELOW O TER 62-610, F.A.C. I OF THE WATER MAIN IS LAID AT OF HOLLYWOOD, UNLESS OTHERW MAINTAINED BETWEEN ANY TYPE DOT HORIZONTAL SEPARATION, T HELF LOCATED ON ONE SIDE OF T MAIN IS AT LEAST 18 INCHES ABOVE TANCE OF 18 INCHES IN A PARALL SEWER OR FORCE MAIN SHALL B MAIN SHOULD ALWAYS BE ABOVE BLE FROM JOINTS ON THE SEWER CROSSING MUST BE MECHANICA	LEAST 6 INCHI WISE APPROVE E OF SEWER AN THE WATER MA THE SEWER OR VE THE TOP OF LEL INSTALLATIO BE CONSTRUCTI E THE SEWER, J OR FORCE MA	ES ABOVE THE D. ND WATER MAIN AIN MUST BE LAID FORCE MAIN AT THE SEWER. ONS, THE WATER ED OF DIP WITH A JOINTS ON THE VIN (STAGGERED			1. 2. 3.	DTES: WHEN PIPE INSTALL WHENEVER BEDDING BE CLEAN SANDY S BEDDING SHALL BE LIMEROCK). CRUSH PARTICLES OF PRO MATERIAL, WOOD, T MATERIALS. ALL BEDDING MATE ANY PIPE IS LAID. SECTION 02222, "E DENSITY TESTING S	
ENDLAW 000 2 - ISSUED: 03/01	/1994 DEPARTMENT OF F	PUBLIC UTILITIES STANDAR	D DETAIL	REVISED: 11/06/2017	7				DEDADTMENT OF DUD

DRAWING NO.

G-01.1


SEPARATION REQUIREMENTS

OF F.D.E.P.

PROVED:

OF HOLLYWOOD, FIG	ISSUED:	03/01/1994	DEPARTMENT OF
DIAMOND OF THE	DRAWN:	EAM	PIPE LAYIN
GOLD COAST	APPROVED	: XXX	SI

AVMANDED					11 OR 1-800-432-4770 (SUNSHINE ONE-CALL OF FLORIDA	y.
ABOVE THE PIPE. THE MARKER TAPE SHOULD BE IMPRINTED WITH A WARNING THAT THERE IS BURIED PIPE BELOW. THE TAPE SHALL BE MAGNA TEC, AS MANUFACTURED BY THOR ENTERPRISES INC. OR APPROVED EQUAL. 42. ALL CONNECTIONS TO EXISTING MAINS SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR. WATER CONNECTIONS SHALL BE METERED, AND THE COST OF WATER AND TEMPORARY METER SHALL BE BORNE BY THE CONTRACTOR. 43. A COMPLETE AS-BUILT SURVEY SHALL BE ACCURATELY RECORDED OF THE UTILITY SYSTEM DURING CONSTRUCTION. AS-BUILT SURVEY SHALL BE ACCURATELY RECORDED OF THE UTILITY SYSTEM DURING CONSTRUCTION. AS-BUILT SURVEY SHALL BE ACCURATELY RECORDED OF THE UTILITY SYSTEM DURING CONSTRUCTION. AS-BUILT SURVEY SHALL BE COVERED IN OVERALL BID. THE AS-BUILT SURVEY SHALL INCLUDE: a. PLAN VIEW SHOWING THE HORIZONTAL LOCATIONS OF EACH MANHOLE, INLET, VALVE, FITTING, BEND AND HORIZONTAL PIPE DEFLECTIONS WITH COORDINATES AND IN REFERENCE TO A SURVEY BASELINE OR RIGHT-OF-WAY CENTERLINE. b. THE PLAN VIEW SHALL ALSO SHOW SPOT ELEVATIONS OF THE TOP OF THE MAIN (WATER MAIN AND FORCE MAIN) OR PIPE INVERTS (GRAVITY MAINS) AT INTERVALS NOT TO EXCEED 100 FEET AS MEASURED ALONG MAIN. THE PLAN VIEW SHALL ALSO INCLUDE SPOT ELEVATIONS AT EACH MANHOLE, INLET, VALVE, FITTING, BEND AND VERTICAL PIPE DEFLECTION. c. THE PLAN VIEW SHALL ALSO SHOW THE HORIZONTAL SEPARATION FROM UNDERGROUND UTILITIES IMMEDIATELY ADJACENT OR PARALLEL TO THE NEW MAIN. d. PROFILE VIEW WITH SPOT ELEVATIONS OF THE TOP OF THE MAIN (WATER MAIN AND FORCE MAIN) OR PIPE INVERT (GRAVITY MAIN) AND OF THE FINSHED GRADE OR MANHOLE RIM DIRECTIVA BOVE THE MAIN AT INTERVALS NOT TO EXCEED 100 FEET AS MEASURED ALONG THE MAIN. THE PROFILE VIEW SHALL ALSO INCLUDE SPOT ELEVATIONS AT EACH MANHOLE, INLET, VALVE, FITTING, BEND AND VERTICAL PIPE DEFLECTION. 6. THE PROFILE VIEW WITH SPOT ELEVATIONS OF THE TOP OF THE MAIN (WATER MAIN AND FORCE MAIN) OR PIPE INVERT (GRAVITY MAIN) AND OF THE TOP SPOT ELEVATIONS AT EACH MANHOLE, INLET, VALVE, FITTING, BEND AND VERTICAL PIPE DEFLECTION. 6. THE PROFILE VIEW SHALL ALSO				Alwa	ays call 811 two full business days before you dig	
CONNECTIONS SHALL BE METERED, AND THE COST OF WATER AND TEMPORARY METER SHALL BE BORNE BY THE CONTRACTOR. 43. A COMPLETE AS-BUILT SURVEY SHALL BE ACCURATELY RECORDED OF THE UTILITY SYSTEM DURING CONSTRUCTION. AS-BUILT SURVEY SHALL BE SUBMITTED TO ECSD SIGNED AND SEALED BY A FLORIDA REGISTERED SURVEYOR PRIOR TO FINAL INSPECTION AND ACCEPTANCE OF PROJECT. THE COST OF SIGNED AND SEALED AS-BUILTS SHALL BE COVERED IN OVERALL BID. THE AS-BUILT SURVEY SHALL INCLUDE: a. PLAN VIEW SHOWING THE HORIZONTAL LOCATIONS OF EACH MANHOLE, INLET, VALVE, FITTING, BEND AND HORIZONTAL PIPE DEFLECTIONS WITH COORDINATES AND IN REFERENCE TO A SURVEY BASELINE OR RIGHT-OF-WAY CENTERLINE. b. THE PLAN VIEW SHALL ALSO SHOW SPOT ELEVATIONS OF THE TOP OF THE MAIN (WATER MAIN AND FORCE MAIN) OR PIPE INVERTS (GRAVITY MAINS) AT INTERVALS NOT TO EXCEED 100 FEET AS MEASURED ALONG MAIN. THE PLAN VIEW SHALL ALSO INCLUDE SPOT ELEVATIONS AT EACH MANHOLE, INLET, VALVE, FITTING, BEND AND VERTICAL PIPE DEFLECTION. c. THE PLAN VIEW SHALL ALSO SHOW THE HORIZONTAL SEPARATION FROM UNDERGROUND UTILITIES IMMEDIATELY ADJACENT OR PARALLEL TO THE NEW MAIN. d. PROFILE VIEW WITH SPOT ELEVATIONS OF THE TOP OF THE MAIN (WATER MAIN AND FORCE MAIN) OR PIPE INVERT (GRAVITY MAIN) AND OF THE FINDE OF THE FINMED GRADE OR MANHOLE, RIM DIRECTLY ABOVE THE MAIN AT INTERVALS NOT TO EXCEED 100 FEET AS MEASURED ALONG THE MAIN. THE PROFILE VIEW SHALL ALSO SHOW THE LOP OF THE MAIN (WATER MAIN AND FORCE MAIN) OR PIPE INVERTIGAL SHANL ALSO INCLUDE SPOT ELEVATIONS AT EACH MANHOLE, INLET, VALVE, FITTING, BEND AND VERTICAL PIPE DEFLECTION. e. THE PROFILE VIEW SHALL ALSO AND VERTICAL PIPE DEFLECTION. for the PROFILE VIEW SHALL SHOW ALL UNDERGROUND UTILITIES CROSSING THE NEW MAIN AND THE VERTICAL SEPARATION PROVIDED BETWEEN THAT UNDERGROUND UTILITY AND THE NEW MAIN. f. ALL CADD FILES MUST BE CREATED FOLLOWING THE CITY OF HOLLYWOOD "SURVEY / AS-BUILT CAD DRAWING STANDARDS'' ESSUED: 03/01/1994 DEPARTMENT OF PUBLIC UTILITIES STANDARD DETAIL REVISED: 11/06/2015 DRAWN: EAM		ABOV BURIE	E THE PIPE. D PIPE BELC	THE MAR	KER TAPE SHOULD BE IMPRINTED WITH A WARNING TAPE SHALL BE MAGNA TEC, AS MANUFACTURED BY T	THAT THERE IS
CONSTRUCTION. AS-BUILT SURVEY SHALL BE SUBMITTED TO ECSD SIGNED AND SEALED BY A FLORIDA REGISTERED SURVEYOR PRIOR TO FINAL INSPECTION AND ACCEPTANCE OF PROJECT. THE COST OF SIGNED AND SEALED AS-BUILTS SHALL BE COVERED IN OVERALL BID. THE AS-BUILT SURVEY SHALL INCLUDE: a. PLAN VIEW SHOWING THE HORIZONTAL LOCATIONS OF EACH MANHOLE, INLET, VALVE, HITTING, BEND AND HORIZONTAL PIPE DEFLECTIONS WITH COORDINATES AND IN REFERENCE TO A SURVEY BASELINE OR RIGHT-OF-WAY CENTERLINE. b. THE PLAN VIEW SHALL ALSO SHOW SPOT ELEVATIONS OF THE TOP OF THE MAIN (WATER MAIN AND FORCE MAIN) OR PIPE INVERTS (GRAVITY MAINS) AT INTERVALS NOT TO EXCEED 100 FEET AS MEASURED ALONG MAIN. THE PLAN VIEW SHALL ALSO INCLUDE SPOT ELEVATIONS AT EACH MANHOLE, INLET, VALVE, HITTING, BEND AND VERTICAL PIPE DEFLECTION. c. THE PLAN VIEW SHALL ALSO SHOW THE HORIZONTAL SEPARATION FROM UNDERGROUND UTILITIES IMMEDIATELY ADJACENT OR PARALLEL TO THE NEW MAIN. d. PROFILE VIEW WITH SPOT ELEVATIONS OF THE TOP OF THE MAIN (WATER MAIN AND FORCE MAIN) OR PIPE INVERT (GRAVITY MAIN) AND OF THE FINISHED GRADE OR MANHOLE RIM DIRECTLY ABOVE THE MAIN AT INTERVALS NOT TO EXCEED 100 FEET AS MEASURED ALONG THE MAIN. THE PROFILE VIEW SHALL ALSO INCLUDE SPOT TUEVATIONS AT EACH MANHOLE, INLET, VALVE, FITTING, BEND AND VERTICAL PIPE DEFLECTION. e. THE PROFILE VIEW SHALL SHOW ALL UNDERGROUND UTILITIES CROSSING THE NEW MAIN AND THE VERTICAL SEPARATION PROVIDED BETWEEN THAT UNDERGROUND UTILITY AND THE NEW MAIN. f. ALL CADD FILES MUST BE CREATED FOLLOWING THE CITY OF HOLLYWOOD "SURVEY / AS-BUILT CAD DRAWING STANDARDS" ISSUED: 03/01/194 DEPARTMENT OF PUBLIC UTILITIES STANDARD DETAIL REVISED: 11/06/2017 DRAWINE EAM GENERAL NOTES DRAWINE CAM DRAWING NO.		CONN	IECTIONS SH	IALL BE N	IETERED, AND THE COST OF WATER AND TEMPORARY	
 FITTING, BEND AND HORIZONTAL PIPE DEFLECTIONS WITH COORDINATES AND IN REFERENCE TO A SURVEY BASELINE OR RIGHT-OF-WAY CENTERLINE. THE PLAN VIEW SHALL ALSO SHOW SPOT ELEVATIONS OF THE TOP OF THE MAIN (WATER MAIN AND FORCE MAIN) OR PIPE INVERTS (GRAVITY MAINS) AT INTERVALS NOT TO EXCEED 100 FEET AS MEASURED ALONG MAIN. THE PLAN VIEW SHALL ALSO INCLUDE SPOT ELEVATIONS AT EACH MANHOLE, INLET, VALVE, FITTING, BEND AND VERTICAL PIPE DEFLECTION. THE PLAN VIEW SHALL ALSO SHOW THE HORIZONTAL SEPARATION FROM UNDERGROUND UTILITIES IMMEDIATELY ADJACENT OR PARALLEL TO THE NEW MAIN. PROFILE VIEW WITH SPOT ELEVATIONS OF THE TOP OF THE MAIN (WATER MAIN AND FORCE MAIN) OR PIPE INVERT (GRAVITY MAIN) AND OF THE FINISHED GRADE OR MANHOLE RIM DIRECTLY ABOVE THE MAIN AT INTERVALS NOT TO EXCEED 100 FEET AS MEASURED ALONG THE MAIN. THE PROFILE VIEW SHALL ALSO INCLUDE SPOT ELEVATIONS AT EACH MANHOLE, INLET, VALVE, FITTING, BEND AND VERTICAL PIPE DEFLECTION. THE PROFILE VIEW SHALL SHOW ALL UNDERGROUND UTILITIES CROSSING THE NEW MAIN AND THE VERTICAL SEPARATION PROVIDED BETWEEN THAT UNDERGROUND UTILITY AND THE NEW MAIN. ALL CADD FILES MUST BE CREATED FOLLOWING THE CITY OF HOLLYWOOD "SURVEY / AS-BUILT CAD DRAWING STANDARDS" ISSUED: 03/01/1994 DEPARTMENT OF PUBLIC UTILITIES STANDARD DETAIL REVISED: 11/06/2017 DRAWINE EAM 	an san	CONS REGIS SIGNE	TRUCTION. TERED SURVED AND SEAL	AS-BUILT /EYOR PR	SURVEY SHALL BE SUBMITTED TO ECSD SIGNED AND S IOR TO FINAL INSPECTION AND ACCEPTANCE OF PROJ	SEALED BY A FLORIDA IECT. THE COST OF
 MAIN AND FORCE MAIN) OR PIPE INVERTS (GRAVITY MAINS) AT INTERVALS NOT TO EXCEED 100 FEET AS MEASURED ALONG MAIN. THE PLAN VIEW SHALL ALSO INCLUDE SPOT ELEVATIONS AT EACH MANHOLE, INLET, VALVE, FITTING, BEND AND VERTICAL PIPE DEFLECTION. THE PLAN VIEW SHALL ALSO SHOW THE HORIZONTAL SEPARATION FROM UNDERGROUND UTILITIES IMMEDIATELY ADJACENT OR PARALLEL TO THE NEW MAIN. PROFILE VIEW WITH SPOT ELEVATIONS OF THE TOP OF THE MAIN (WATER MAIN AND FORCE MAIN) OR PIPE INVERT (GRAVITY MAIN) AND OF THE FINISHED GRADE OR MANHOLE RIM DIRECTLY ABOVE THE MAIN AT INTERVALS NOT TO EXCEED 100 FEET AS MEASURED ALONG THE MAIN. THE PROFILE VIEW SHALL ALSO INCLUDE SPOT ELEVATIONS AT EACH MANHOLE, INLET, VALVE, FITTING, BEND AND VERTICAL PIPE DEFLECTION. THE PROFILE VIEW SHALL SHOW ALL UNDERGROUND UTILITIES CROSSING THE NEW MAIN AND THE VERTICAL SEPARATION PROVIDED BETWEEN THAT UNDERGROUND UTILITY AND THE NEW MAIN. ALL CADD FILES MUST BE CREATED FOLLOWING THE CITY OF HOLLYWOOD "SURVEY / AS-BUILT CAD DRAWING STANDARDS" ISSUED: 03/01/1994 DEPARTMENT OF PUBLIC UTILITIES STANDARD DETAIL REVISED: 11/06/2017 RAWN: EAM GENERAL NOTES DRAWING NO. 		a.	FITTING, B	end and	HORIZONTAL PIPE DEFLECTIONS WITH COORDINATES	
 UTILITIES IMMEDIATELY ADJACENT OR PARALLEL TO THE NEW MAIN. PROFILE VIEW WITH SPOT ELEVATIONS OF THE TOP OF THE MAIN (WATER MAIN AND FORCE MAIN) OR PIPE INVERT (GRAVITY MAIN) AND OF THE FINISHED GRADE OR MANHOLE RIM DIRECTLY ABOVE THE MAIN AT INTERVALS NOT TO EXCEED 100 FEET AS MEASURED ALONG THE MAIN. THE PROFILE VIEW SHALL ALSO INCLUDE SPOT ELEVATIONS AT EACH MANHOLE, INLET, VALVE, FITTING, BEND AND VERTICAL PIPE DEFLECTION. THE PROFILE VIEW SHALL SHOW ALL UNDERGROUND UTILITIES CROSSING THE NEW MAIN AND THE VERTICAL SEPARATION PROVIDED BETWEEN THAT UNDERGROUND UTILITY AND THE NEW MAIN. ALL CADD FILES MUST BE CREATED FOLLOWING THE CITY OF HOLLYWOOD "SURVEY / AS-BUILT CAD DRAWING STANDARDS" 		b.	MAIN AND 100 FEET A ELEVATION	FORCE N S MEASU	IAIN) OR PIPE INVERTS (GRAVITY MAINS) AT INTERVA IRED ALONG MAIN. THE PLAN VIEW SHALL ALSO INCL	LS NOT TO EXCEED UDE SPOT
 MAIN) OR PIPE INVERT (GRAVITY MAIN) AND OF THE FINISHED GRADE OR MANHOLE RIM DIRECTLY ABOVE THE MAIN AT INTERVALS NOT TO EXCEED 100 FEET AS MEASURED ALONG THE MAIN. THE PROFILE VIEW SHALL ALSO INCLUDE SPOT ELEVATIONS AT EACH MANHOLE, INLET, VALVE, FITTING, BEND AND VERTICAL PIPE DEFLECTION. e. THE PROFILE VIEW SHALL SHOW ALL UNDERGROUND UTILITIES CROSSING THE NEW MAIN AND THE VERTICAL SEPARATION PROVIDED BETWEEN THAT UNDERGROUND UTILITY AND THE NEW MAIN. f. ALL CADD FILES MUST BE CREATED FOLLOWING THE CITY OF HOLLYWOOD "SURVEY / AS-BUILT CAD DRAWING STANDARDS" ISSUED: 03/01/1994 DEPARTMENT OF PUBLIC UTILITIES STANDARD DETAIL REVISED: 11/06/2017 DRAWN: EAM GENERAL NOTES 		c.	the second second second second	or a see of or one of the		IUNDERGROUND
AND THE VERTICAL SEPARATION PROVIDED BETWEEN THAT UNDERGROUND UTILITY AND THE NEW MAIN. f. ALL CADD FILES MUST BE CREATED FOLLOWING THE CITY OF HOLLYWOOD "SURVEY / AS-BUILT CAD DRAWING STANDARDS" ISSUED: 03/01/1994 DEPARTMENT OF PUBLIC UTILITIES STANDARD DETAIL REVISED: 11/06/2017 DRAWN: EAM GENERAL NOTES DRAWING NO.		d.	MAIN) OR DIRECTLY A THE MAIN	PIPE INVI ABOVE TH THE PRO	ERT (GRAVITY MAIN) AND OF THE FINISHED GRADE OR IE MAIN AT INTERVALS NOT TO EXCEED 100 FEET AS N OFILE VIEW SHALL ALSO INCLUDE SPOT ELEVATIONS AT	MANHOLE RIM
AS-BUILT CAD DRAWING STANDARDS"		e.	AND THE V	ERTICAL		
DRAWN: EAM GENERAL NOTES DRAWING NO.		f.				D "SURVEY /
	LYWOO	S. FLOR	SSUED: 03/	01/1994	DEPARTMENT OF PUBLIC UTILITIES STANDARD DET	AIL REVISED: 11/06/2017
	AMOND or na D COAST -	990				

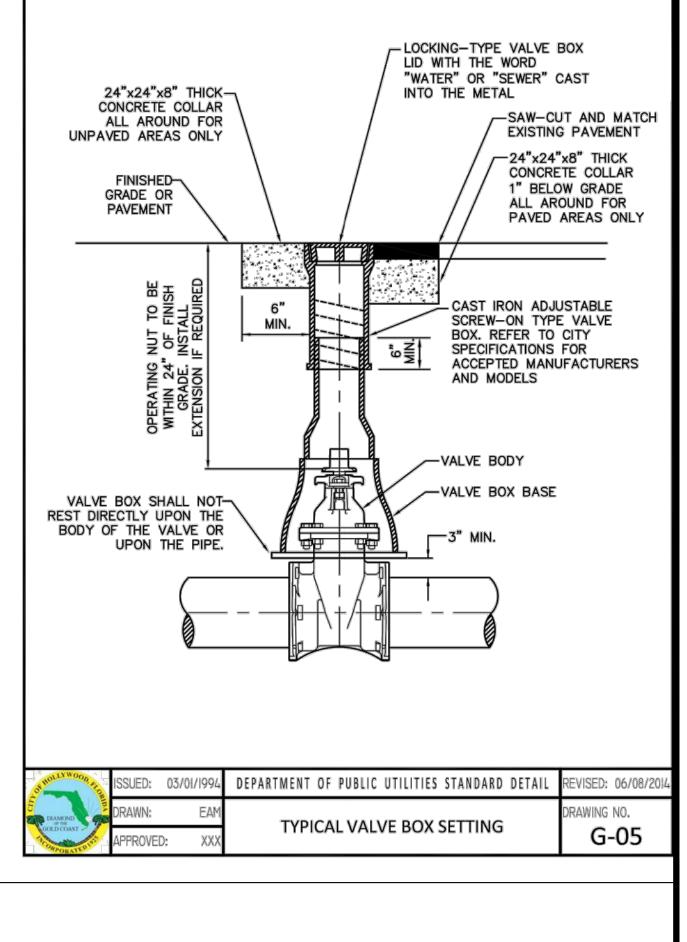


LLR Architects, Inc. ARCHITECTURE & PLANNING 12980 S.W. 52 STREET MIRAMAR, FLORIDA 33027

(OFF.) — 305—403—7926 (CELL)— 786—543—0851 E—MAIL: llarosa@larosaarchitectcts.c

Luis LaRosa-Registered Architect


AR#-0017852 AA#-26003693





 \mathbb{N} Ο ┣— ¥. 0 Į∐ > \bigcirc \square _____ ЕЕТ, I. Ø2Ø ____ $A^{\uparrow}S$ \succ Тщ $\frac{1}{2}$ ທ ຊ Ζ<u>Ω</u> Ш Ζ 92-22@4 VAN BU HOLLYWOOD, F ⊢ Ľ UNITS \overline{A} Ø 22 $\mathbf{>}$ - \sim \mathbf{A} ЦЦ S Ο \square \bigcirc \mathbb{Q} SEAL: AR 0017852 LUIS LA ROSA


DRAWN		
	C.C.	
CHECKED		
	L.L.R.	
DATE		
	12/12/22	
SCALE		
4	AS NOTED	
JOB. NO.		
	@22-@41	
SHEET		
-		
	1 ~)	
	, • ==	
OF	SHEETS	

_					
	CONCRETE THRUST BLOCK EXIST. POTABLE WATER AND/OR SANITARY SEWAGE T FORCE MAIN	PLAN EXISTING 24"x2 CONC 1" BE ALL / PAVE 0 0 0 0 0 0 0 0 0 0 0 0 0	AND MATCH PAVEMENT 24"x8" THICK RETE COLLAR ELOW GRADE AROUND FOR D AREAS ONLY COR BRICK CTED SOIL TO PING VALVE LEVEL WITH	24"x24"x8" THICK CONCRETE COLLAR ALL AROUND FOR UNPAVED AREAS ONLY FINISHED GRADE OR PAVEMENT UNUT TO BE MUHIN 54" OF FINISH OBEVAUNG NOT TO BE MITHIN 24" OF FINISH OF FINISHED GRADE INSTANT	
.8	 TAPPING MUST BE DONI TEMPORARY THRUST BL FOR SEWAGE FORCE MA FOR WATER MAINS, A G SIDE OF THE TAPPING V 		TAPPING OPERATIONS. AT PROPERTY LINE. THE DOWNSTREAM		
TOFHOL	ISSUED: 03/01/1994	DEPARTMENT OF PUBLIC UTILITIES STANDARD D	DRAWING NO.	DRAWN: EAM	TYPIC
Neon	APPROVED: XXX	AND VALVE SETTING		WATER SYSTEM NOTES (CO 11. ALL WATER MAIN INSTALLATIONS SH	
₩ 1. 2. 3. 4. 5. 6.	APPROVED: XXX ATER SYSTEM NOTE NEW OR RELOCATED UNDER EXISTING OR PROPOSED GRA THE OUTSIDE OF THE WATEL INCHES BELOW THE OTHER P NEW OR RELOCATED UNDER EXISTING OR PROPOSED PRE OR PIPELINE CONVEYING REC LEAST 12 INCHES ABOVE OR I UNDER FAC 62-555.314(5)]. AT ALL UTILITY CROSSINGS E ABOVE OR BELOW THE OTHE THE OTHER PIPELINE, OR TH THREE FEET FROM ALL JOINT MAINS, OR PIPELINES CONVE F.A.C., AND AT LEAST SIX FEE WASTEWATER FORCE MAINS III OF CHAPTER 62-610, F.A.C. NEW UNDERGROUND WATEF CROSSING BELOW SANITARY POLYETHYLENE ENCASEMEN FITTINGS, VALVES, RODS, ANI POLYETHYLENE TUBING SHA THE ENDS OF THE PIPE BY OF PROVIDE A SNUG FIT AND SHA THE POLYETHYLENE TUBING NOT INTENDED TO BE A COM TUBING SHALL BE REPAIRED SECTION SHALL BE REPAIRED SECTI	AND VALVE SETTING AND VALVE SETTING SECURED ABOVE, ONE FULL LENGTH OF WATER MAINS INCLUDED IN THIS PROJECT TH/ VITY OR VACUUM-TYPE SANITARY SEWER OR STORM SE MAIN IS AT LEAST SIX INCHES ABOVE THE OTHER PIPEL PELINE. ROUND WATER MAINS INCLUDED IN THIS PROJECT TH/ SURE-TYPE SANITARY SEWER, WASTEWATER OR STORM AIMED WATER MAINS INCLUDED IN THIS PROJECT TH/ SURE-TYPE SANITARY SEWER, WASTEWATER OR STORM AIMED WATER MAINS INCLUDED IN THIS PROJECT TH/ SURE-TYPE SANITARY SEWER, WASTEWATER OR STORM AIMED WATER PIPELINE. [FAC 62-555.314(2); EXCEP ESCRIBED ABOVE, ONE FULL LENGTH OF WATER MAIN J ESCRIBED ABOVE, ONE FULL LENGTH OF WATER MAIN J IS IN VACUUM-TYPE SANITARY SEWERS, STORM SEWERS YING RECLAIMED WATER REGULATED UNDER PART III O T FROM ALL JOINTS IN GRAVITY OR PRESSURE-TYPE SAN OR PIPELINES CONVEYING RECLAIMED WATER NOT RE [FAC 62-555.314(2); EXCEPTIONS ALLOWED UNDER FA MAINS INCLUDED IN THIS PROJECT TO BE DUCTILE IRO SEWER MAINS. T MATERIAL SHALL BE USED TO ENCASE ALL BURIED DUC APPURTENANCES IN ACCORDANCE WITH AWWA C105 L BE CUT TWO FEET LONGER THAN THE PIPE SECTION A L BE SECURED AT QUARTER POINTS WITH POLYETHYLENE TALL BE SECURED AT QUARTER POINTS WITH POLYETHYLENE SHALL PREVENT CONTACT BETWEEN THE PIPE AND BED PLETELY AIRTIGHT AND WATERTIGHT ENCLOSURE. DAM IN A WORKMANLIKE MANNER USING POLYETHYLENE TA ., POLY WRAP WILL NOT BE PAID FOR AS A SEPARATE BI IF THE PRICE BID FOR WATER MAINS. L BE ENCASED IN POLY WRAP UP TO THE GROUND SUR ED BY THE POLY WRAP. PIPE LESS THAN THREE INCHES (3") IN DIAMETER SHALL G PRESSURE, NON-SHOCK, BLOCK PATTERN, SCREWED E ID WEDGE. THEY SHALL BE STANDARD THREADED FOR EL, GATE VALVES SHALL BE OF CAST IRON CONSTRUC OR ALL SIZE VALVES SHALL BE OF CAST IRON CONSTRUC	AT WILL CROSS ANY WER WILL BE LAID SO INE OR AT LEAST 12 AT WILL CROSS ANY A WATER FORCE MAIN, MATER MAIN IS AT TIONS ALLOWED PIPE WILL BE CENTERED RAS POSSIBLE FROM OINTS ARE AT LEAST 5, STORM WATER FORCE FF CHAPTER 62-610, ITARY SEWERS, GULATED UNDER PART C 62-555.314(5)]. N PIPE (D.I.P.) WHEN CTILE IRON PIPE, METHOD A. THE ND SHALL OVERLAP EED AND LAPPED TO ENE TAPE. EACH END TAPE. DING MATERIAL, BUT IS IAGED POLYETHYLENE PE, OR THE DAMAGED D ITEM. IT SHALL BE FACE AND THE WEEP BE RATED FOR TWO SONNET, NON-RISING PVC PIPE AND HAVE A BE RESILIENT SEAT AND 'UTILITY APPROVAL.	WATER SYSTEM NOTES (CO	HE REQUIREN BE DUCTILE II CTILE IRON PI E CEMENT LIN EETING ANSI/ TINGS MUST PE AND FITTI ANICAL JOIN D AS DETERMI CARRIED OU FILL, PRESSUN CARRIED OU FILL, PRESSUN CARRIED OU FILL, PRESSUN CARRIED OU FILL, PRESSUN CARRIED OU FILL, PRESSUN S. /ER WATER M N BETWEEN S DINT SHALL BE REQUIRED. E FOR IDENTIN LICT, WATER I RATION. NO A DDITIONAL FI VIDED BY THE . TWIST-OFF N CHANCALJOIN TH A MINIMI DINT RESTRA SINTEREST OF IN PLACE AND OF THE EXCAL Y DAMAGE TO ONSIBLE FOR
W 1. 2. 3. 4. 5. 6. 7. 8. 9.	APPROVED: XXX APPROVED: XXX ATER SYSTEM NOTE NEW OR RELOCATED UNDER EXISTING OR PROPOSED GRA THE OUTSIDE OF THE WATE INCHES BELOW THE OTHER P NEW OR RELOCATED UNDER EXISTING OR PROPOSED PRE OR PIPELINE CONVEYING REC LEAST 12 INCHES ABOVE OR I UNDER FAC 62-555.314(5)]. AT ALL UTILITY CROSSINGS D ABOVE OR BELOW THE OTHE THE OTHER PIPELINE, OR TH THREE FEET FROM ALL JOINT MAINS, OR PIPELINES CONVE F.A.C., AND AT LEAST SIX FEE WASTEWATER FORCE MAINS III OF CHAPTER 62-610, F.A.C. NEW UNDERGROUND WATEF CROSSING BELOW SANITARY POLYETHYLENE ENCASEMEN FITTINGS, VALVES, RODS, ANI POLYETHYLENE TUBING SHA THE ENDS OF THE PIPE BY OI PROVIDE A SNUG FIT AND SH OF THE POLYETHYLENE TUBING NOT INTENDED TO BE A COM TUBING SHALL BE REPLACED CONSIDERED TO BE A PART OF FIRE HYDRANT BARRELS SHA HOLES SHALL NOT BE COVER GATE VALVES FOR USE WITH HUNDRED (200) PSI WORKIN STEM, BRASS BODY, AND SO MALLEABLE IRON HANDWHE BIDIRECTIONAL FLOW ONLY.	AND VALVE SETTING AND VALVES AND AND AND AND AND AND AND AND	AT WILL CROSS ANY WER WILL BE LAID SO INE OR AT LEAST 12 AT WILL CROSS ANY WATER FORCE MAIN, MATER MAIN IS AT TIONS ALLOWED PIPE WILL BE CENTERED R AS POSSIBLE FROM OINTS ARE AT LEAST S, STORM WATER FORCE IF CHAPTER 62-610, ITARY SEWERS, GULATED UNDER PART C 62-555.314(5)]. N PIPE (D.I.P.) WHEN CTILE IRON PIPE, METHOD A. THE ND SHALL OVERLAP IED AND LAPPED TO ENE TAPE. EACH END TAPE. DING MATERIAL, BUT IS AGED POLYETHYLENE PE, OR THE DAMAGED D ITEM. IT SHALL BE FACE AND THE WEEP BE RATED FOR TWO KONNET, NON-RISING PVC PIPE AND HAVE A BE RESILIENT SEAT AND ' UTILITY APPROVAL. TION AND ADJUSTABLE R THE WATER LINES. BLE FOR DEPTHS OF THE DUR INCHES (24") OF EMENTS OF CHAPTER	APPROVED: XXX WATER SYSTEM NOTES (CC) 1. ALL WATER MAIN INSTALLATIONS SH 62-555.320 F.A.C. 12. ALL PVC PIPE SHALL CONFORM TO TI DR 18. ALL DIP WATER MAINS SHALL COMPLYING WITH CLASS 52. ALL DUC ANSI/AWWA C151/A21.51-02 AND BI 13. FITTINGS SHALL BE DUCTILE IRON, MI MINIMUM WORKING PRESSURE, FIT C104/A21.4-03. ALL DUCTILE IRON PIP AMERICA. 14. ALL DUCTILE IRON PIPE TO BE MECH AGAINST CORROSION SHALL BE USED 15. PAVEMENT RESTORATION SHALL BE 16. ALL TRENCHING, PIPE LAYING, BACKI CITY OF HOLLYWOOD SPECIFICATION 17. THE MINIMUM DEPTH OF COVER OV 18. MINIMUM HORIZONTAL SEPARATION 19. MAXIMUM DEFLECTION PER EACH JO (MAXIMUM) WHERE DEFLECTION IS F 20. CONTRACTOR SHALL BE RESPONSIBLE MINIMUM COVER. IN CASE OF CONFI WITH 18" MINIMUM VERTICAL SEPARATION 19. PIPE JOINT RESTRAINT SHALL BE PROV MANUFACTURED TO ASTM A 536-80. THE RESTRAINING THE MAIN OR THE AC 21. PIPE JOINT RESTRAINT SHALL BE PROV MANUFACTURED TO ASTM A 536-80. THE RESTRAINING DEVICES. THE MEC PRESSURE OF 250 PSI MINIMUM, WI MEGALUG OR APPROVED EQUAL. JO JOINTS (60 FEET) FROM ANY FITTING. 22. WHENEVER IT IS NECESSARY, IN THE CONTRACTOR SHALL BE SOLELY RESPI CONSTRUCTION, AND FOR THE INDEX	IALL COMPLY HE REQUIREN BE DUCTILE II CTILE IRON PI E CEMENT LII EETING ANSI/ TINGS MUST PE AND FITTI IANICAL JOIN D AS DETERM CARRIED OU FILL, PRESSU IANICAL JOIN CARRIED OU FILL, PRESSU IS. /ER WATER M N BETWEEN S DINT SHALL BI REQUIRED. E FOR IDENTI LICT, WATER I RATION. NO / DDITIONAL FI VIDED BY THE . TWIST-OFF I CHANICAL JOI THA MINIM DINT RESTRA INTEREST OF IN PLACE ANI OF THE EXCA Y DAMAGE TI ONSIBLE FOR

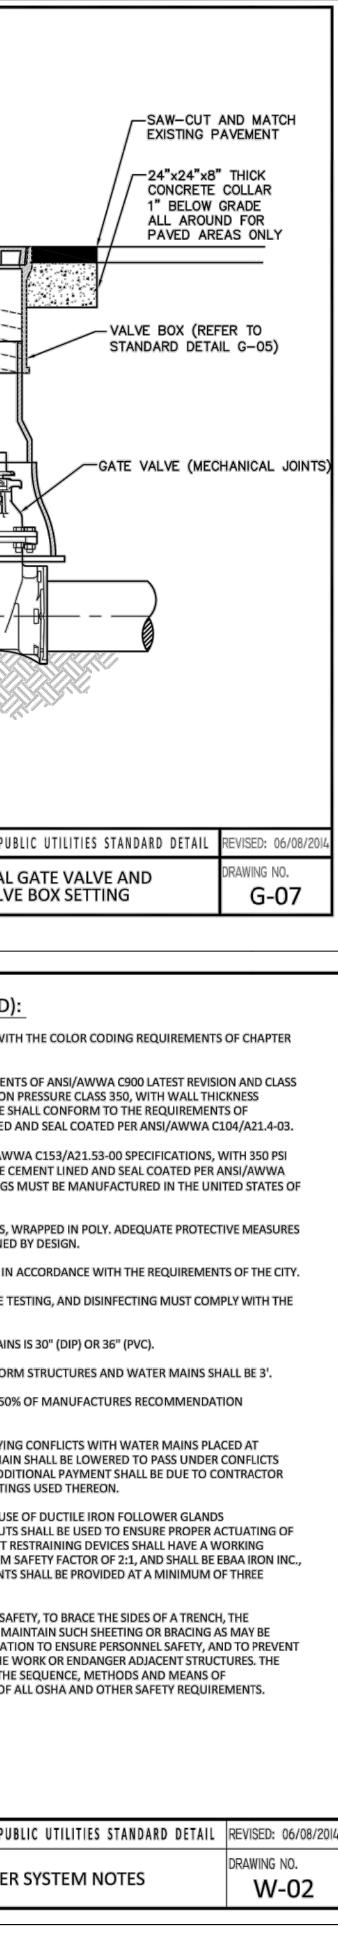


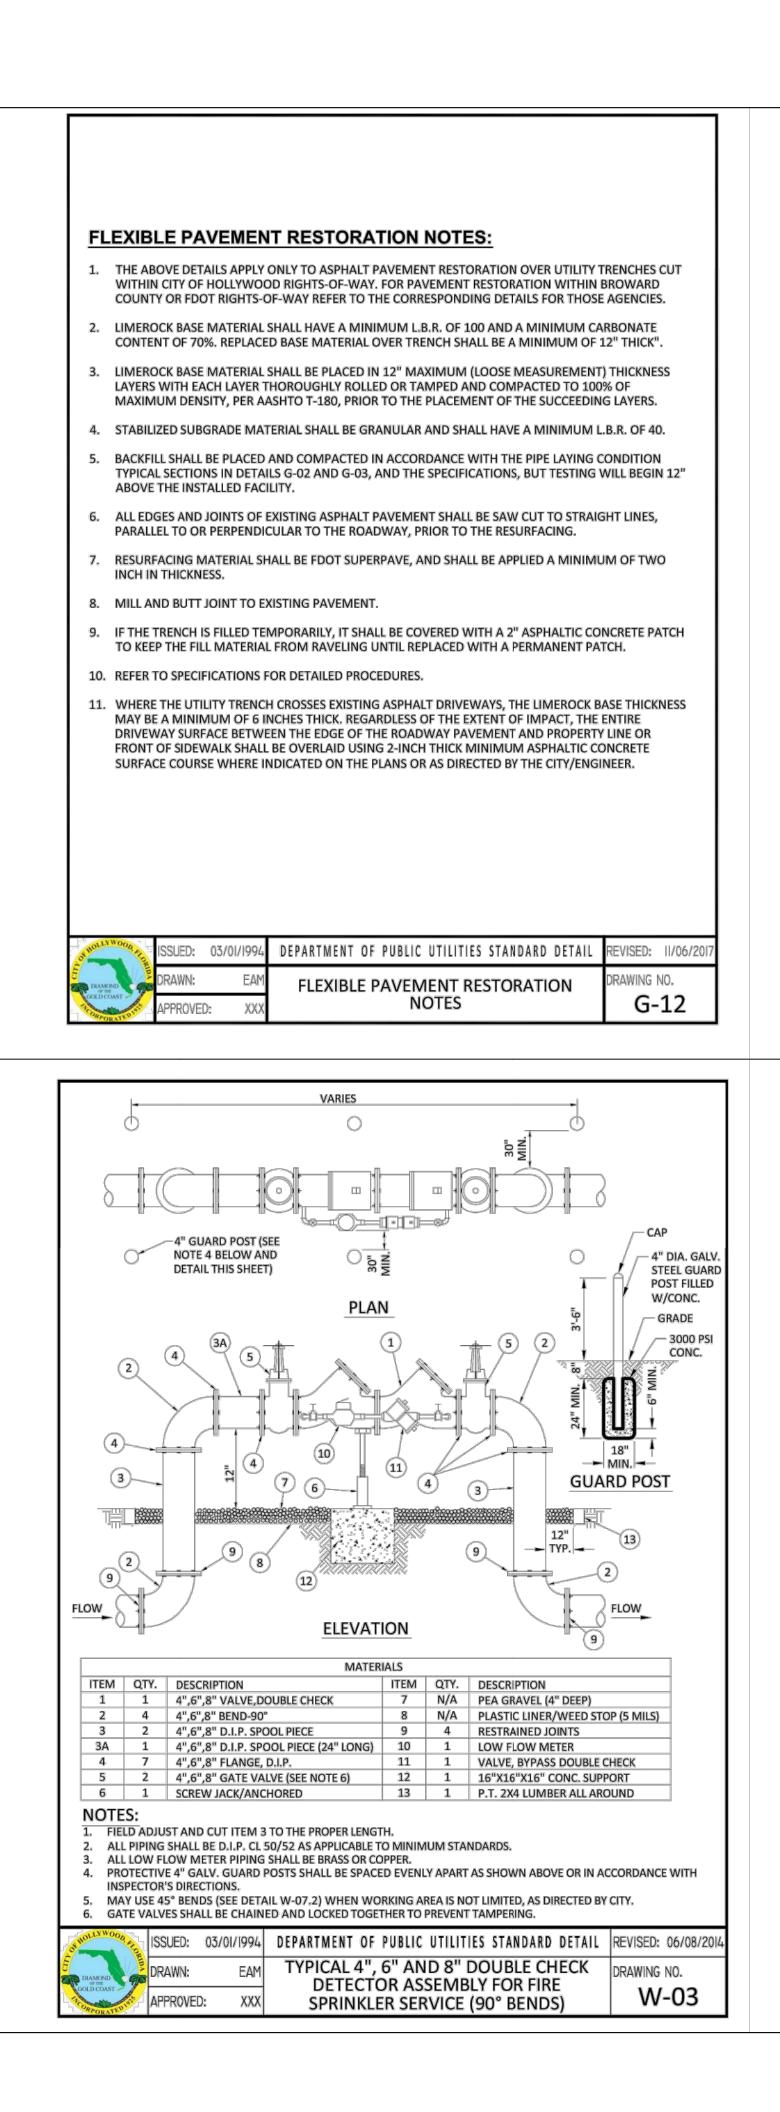

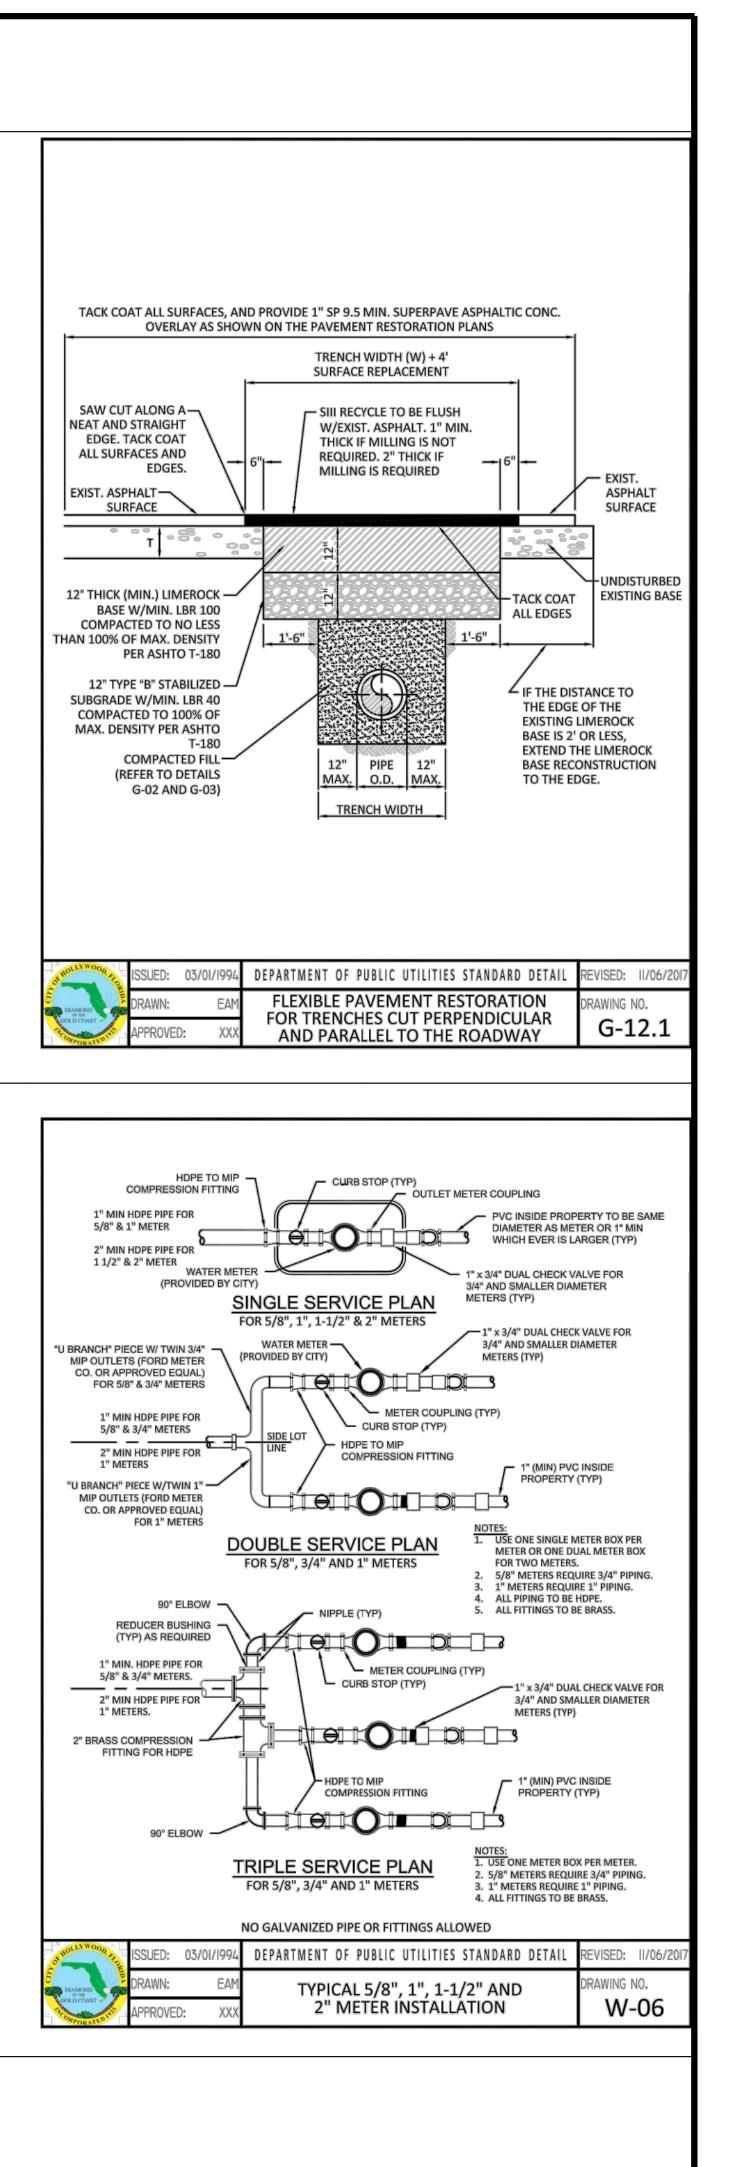


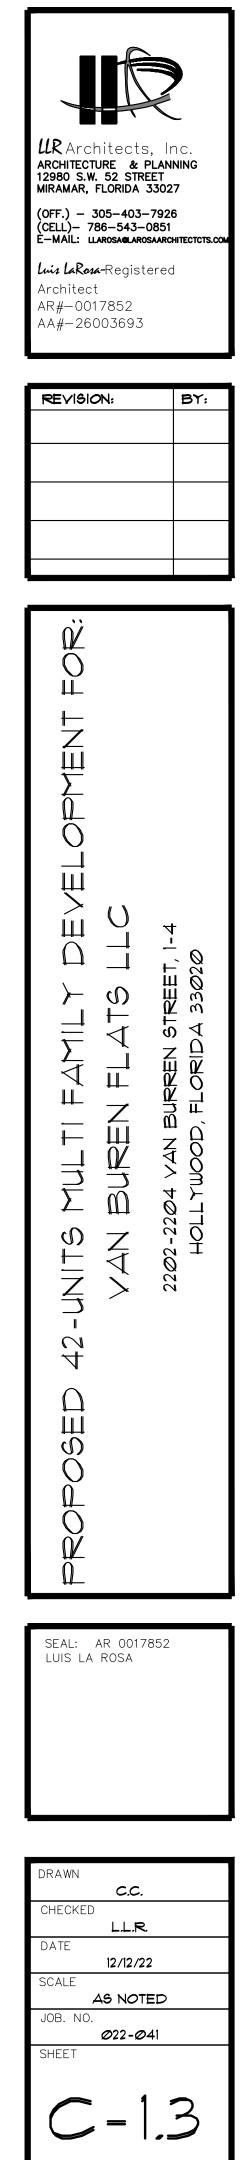


SHEETS

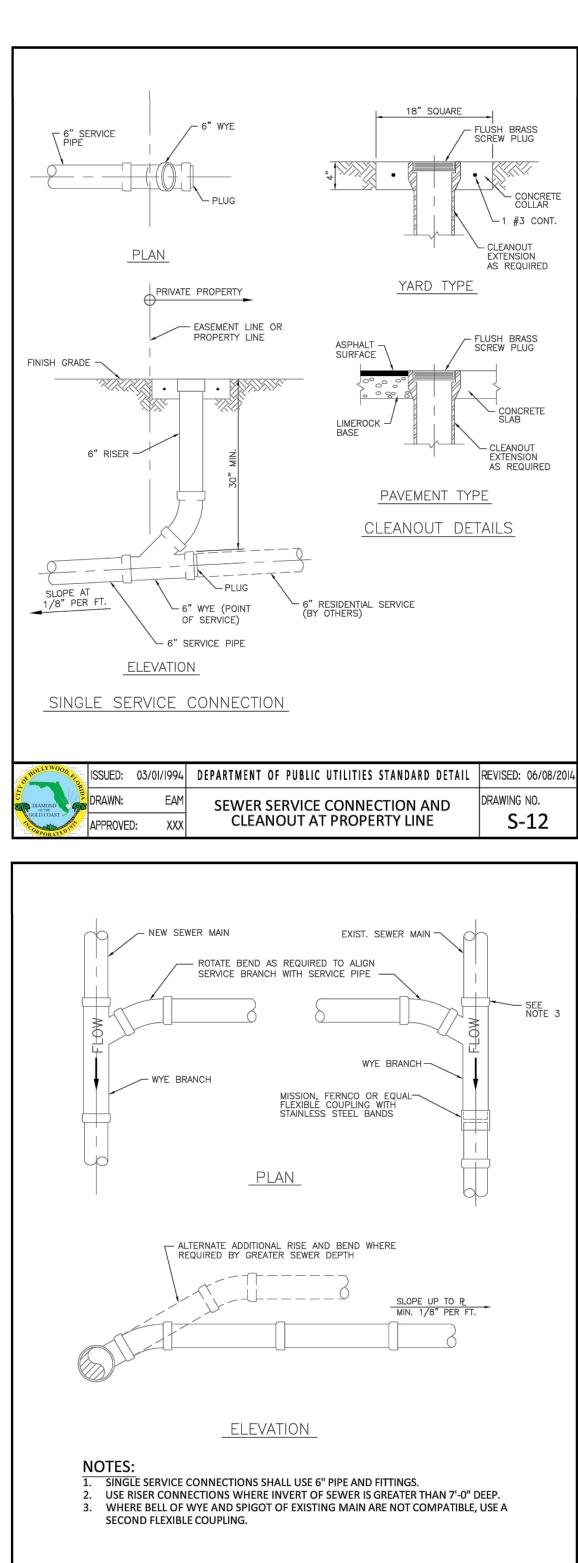


ISSUED: 03/01/1994 DEPARTMENT OF PUBLIC UTILITIES STANDARD DETAIL REVISED	: 06/08/2014
	G NO.
APPROVED: XXX	-09

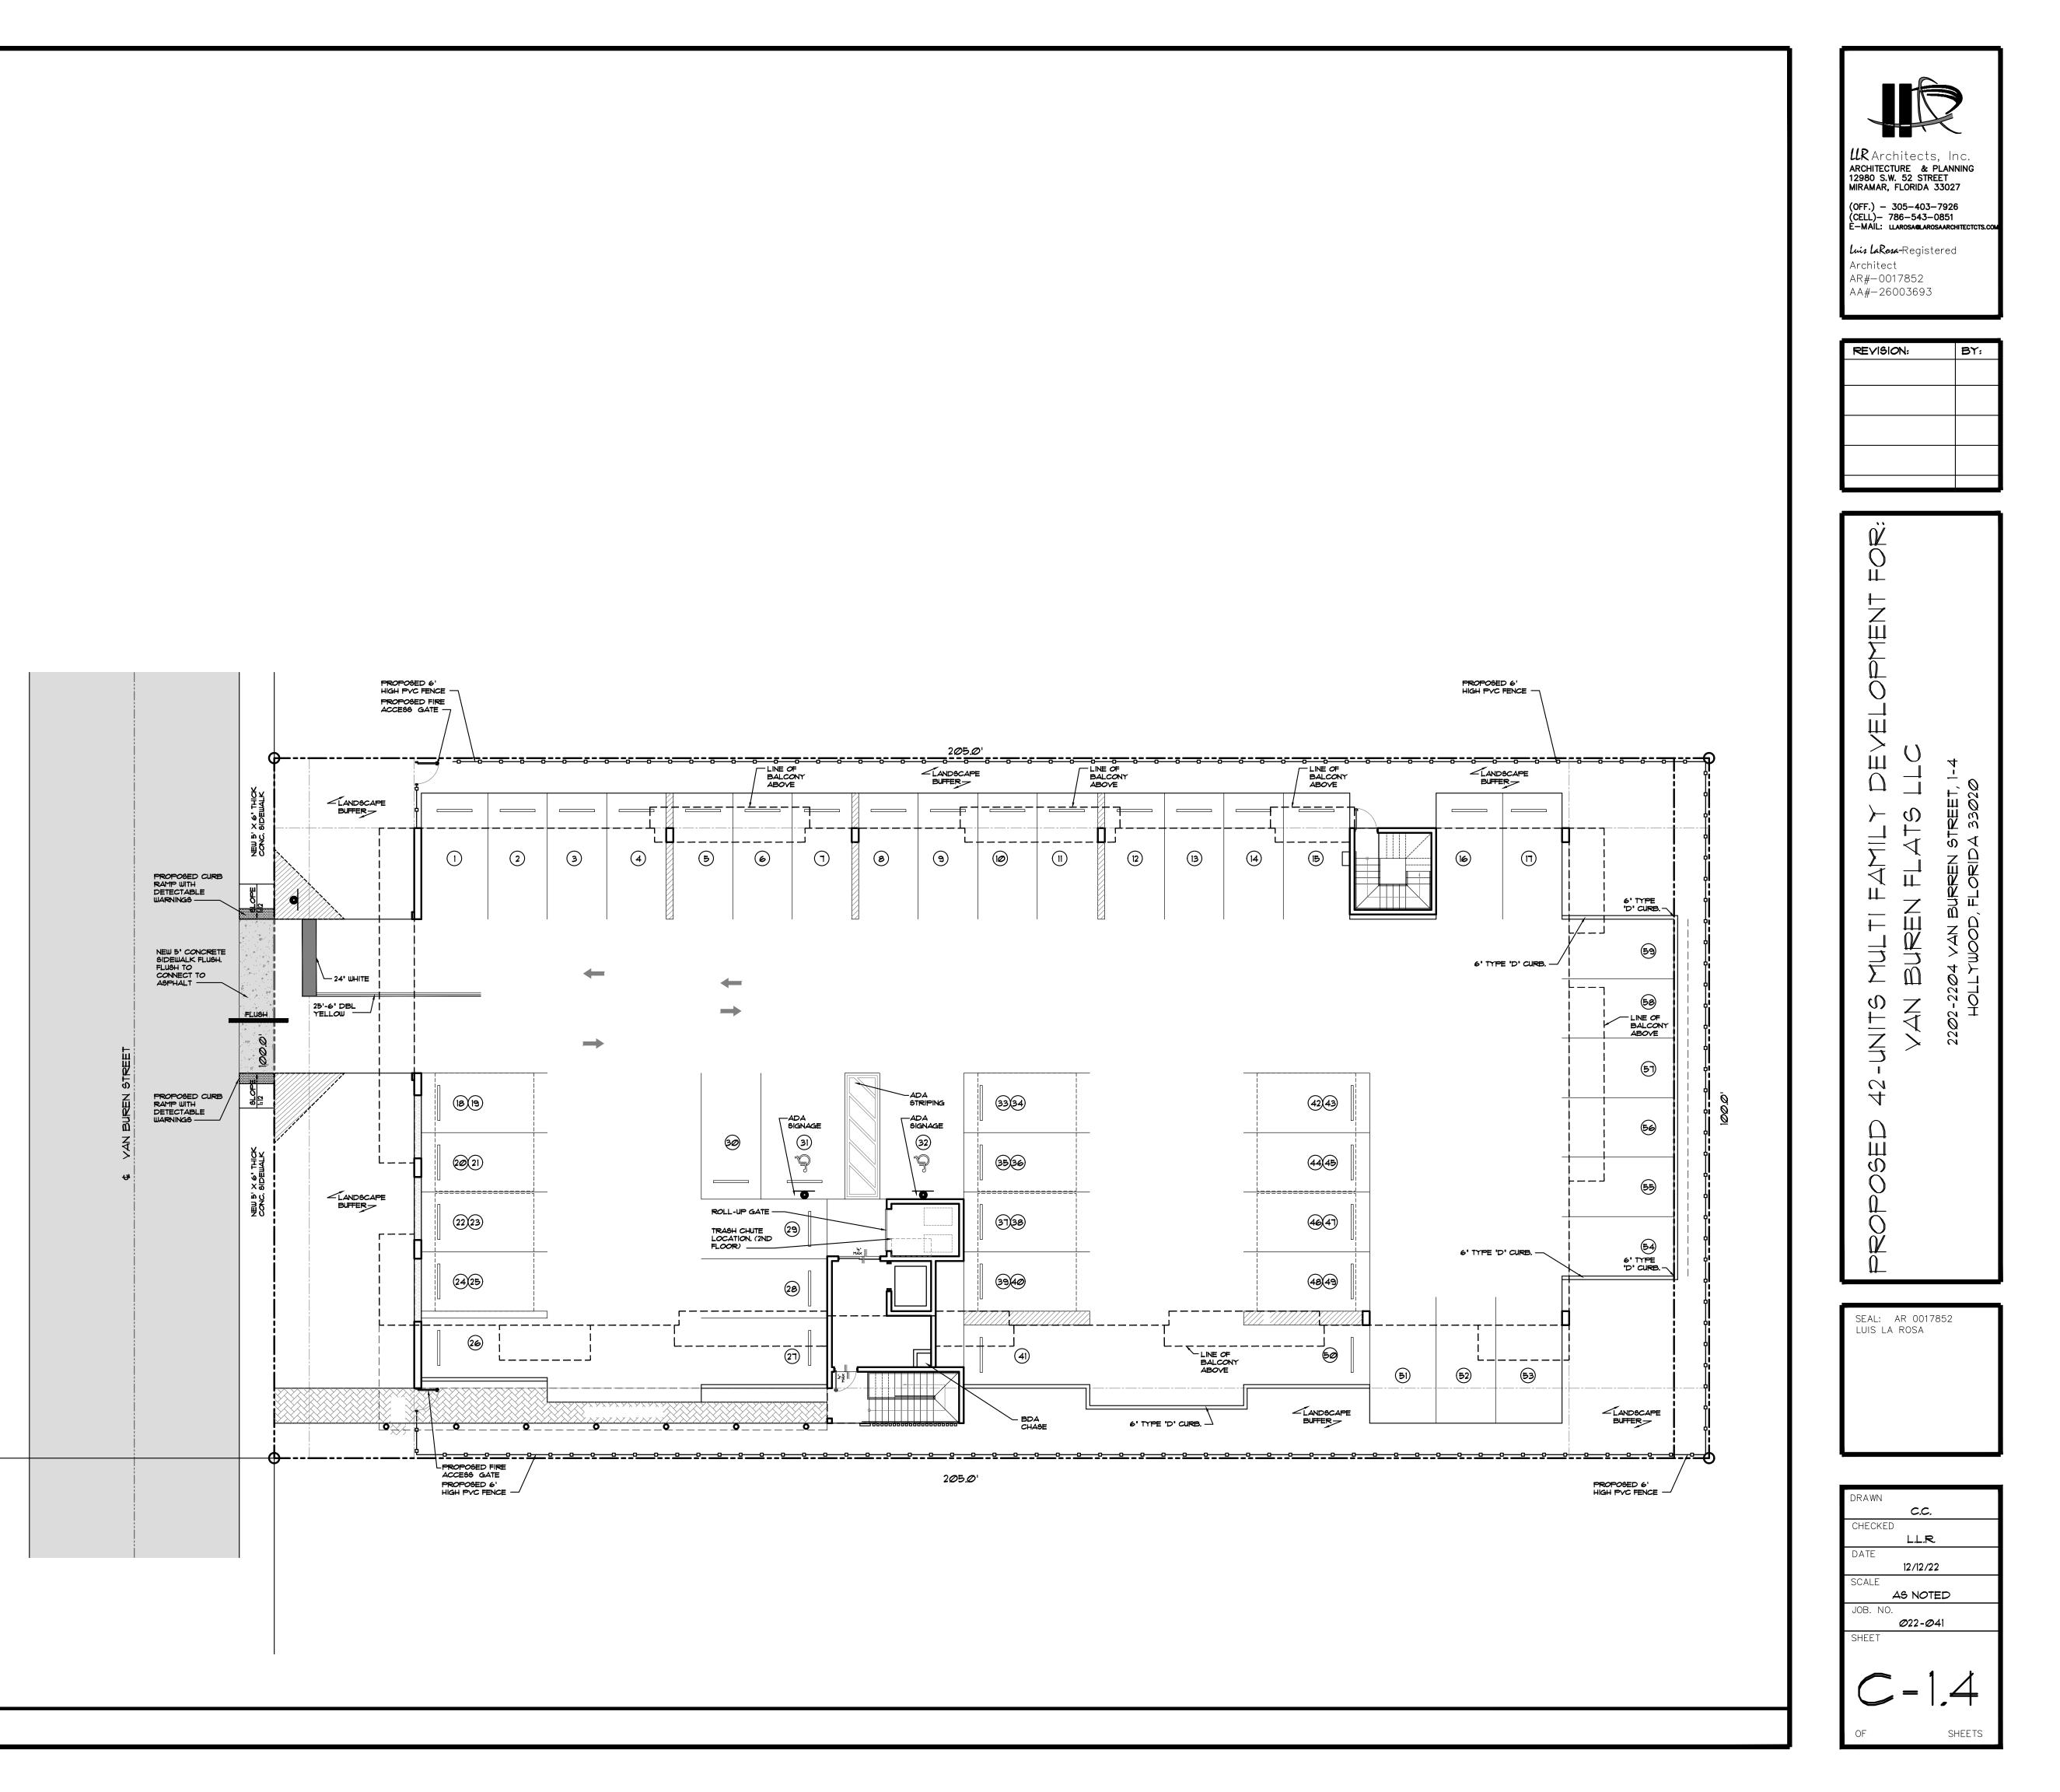

PAVEMENT MARKINGS PLAN

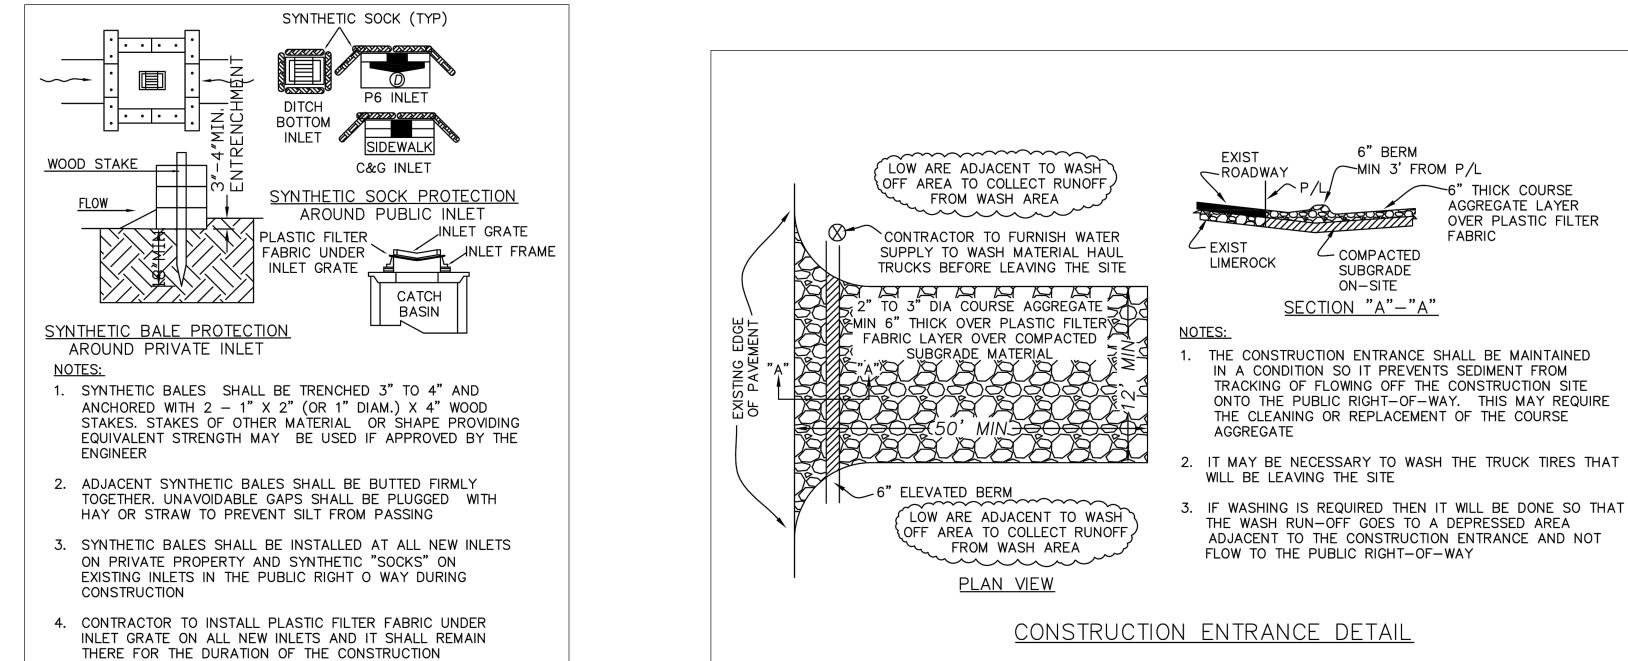

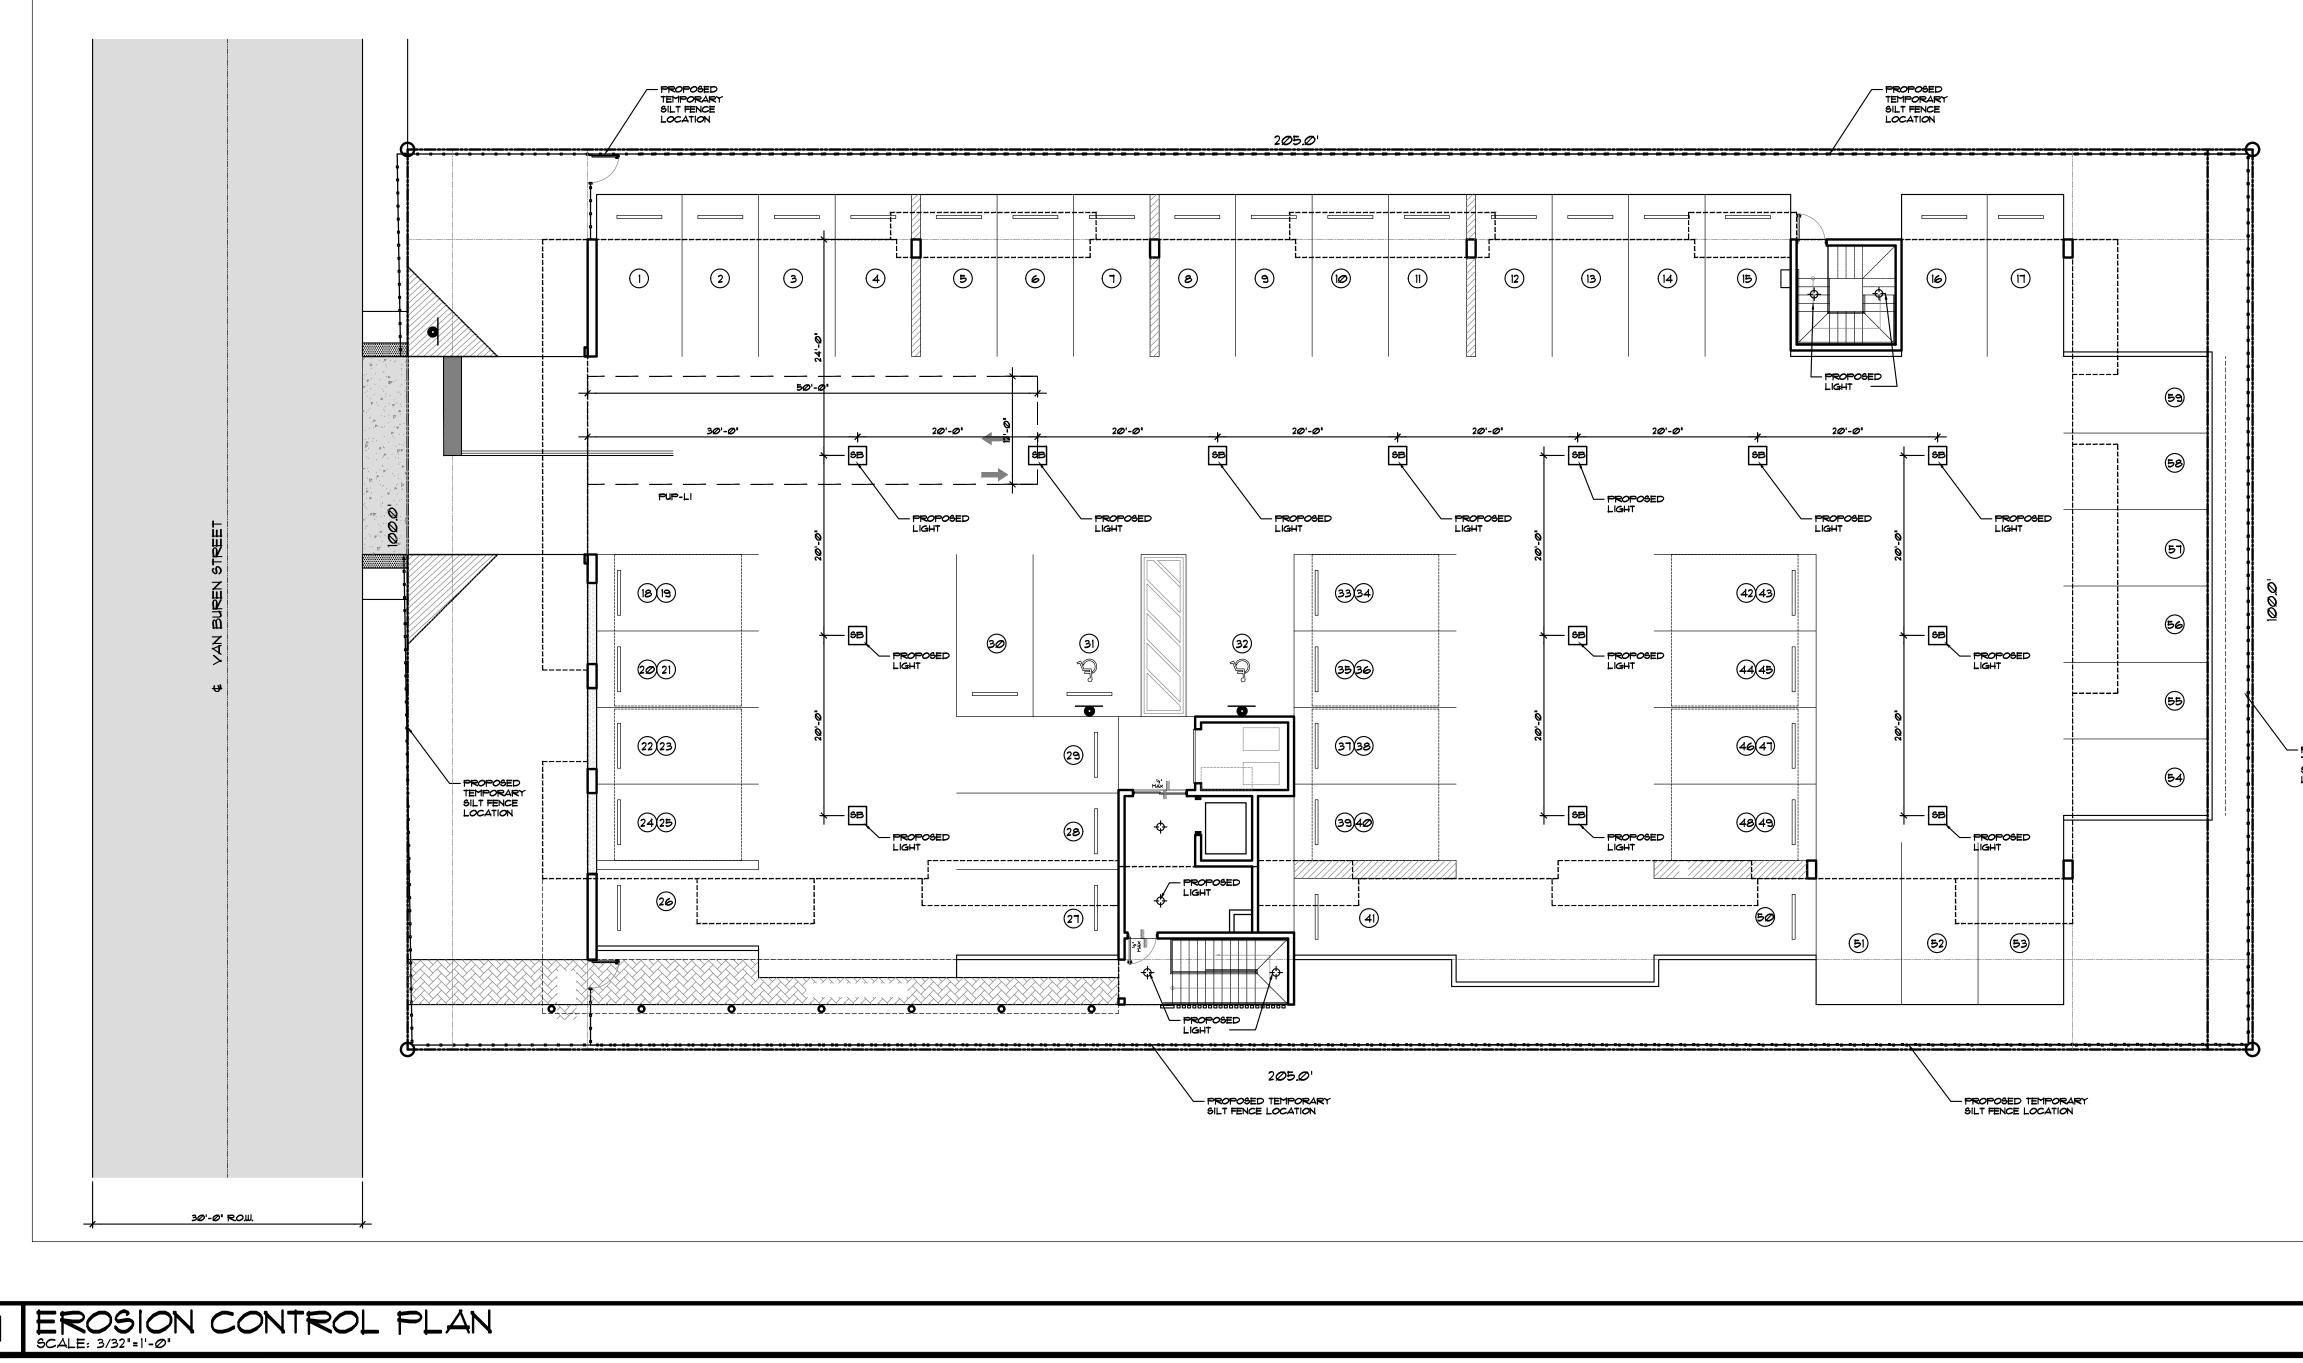




ARCHITECTURE & PLANNING 12980 S.W. 52 STREET MIRAMAR, FLORIDA 33027


(OFF.) - 305-403-7926 (CELL)- 786-543-0851 E-MAIL: LLAROSA@LAROSAARCHITECTCTS.CC

Luis LaRosa-Registered Architect

AR#-0017852 AA#-26003693



Ш \square ____ Q. б Щ C <u>1 6</u> ≓ H---s √ \triangleleft $\neg \Omega$ $\overline{\triangleleft}$ ЦЦ ĶΟ 규 ____ Ш. Ш Ω ₽____ NOC MOC Q \cap ↓ N \triangleleft \sim $\overline{}$ SEAL: AR 0017852 luis la Rosa



This item has been digitally signed and sealed by Sharon Aylward Cox, P.E. on the date adjacent to the seal.

Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.





March 6, 2023

via email: epermits@hollywoodfl.org

Favio Perez, ASLA City of Hollywood Department of Development Services P.O. Box 229045 Hollywood, FL 33022-9045 fperez@hollywoodfl.org 954-921-3900

RE: 2202-2204 Van Buren Street Response to Landscape Comments Received

Mr. Perez,

We are in receipt of the comments in regard to the landscape plans submitted for the project located at 2202-2204 Van Buren Street. Please see below for individual responses to comments along with the landscape plans for review.

Landscape Comments:

- 1. Provide tree disposition plan. RESPONSE: Disposition plan and mitigation calculations are included in revised plans attached.
- 2. Provide sod species on plant schedule. RESPONSE: Acknowledged. Sod species added to plant schedule.
- 3. Label all sides of property weather there are 'Existing Overhead Powerlines' or 'No Overhead Powerlines'. Provide FPL approved trees for planting under powerlines. RESPONSE: Acknowledged. Notes added to plans.
- 4. Tree removal Disclaimer: Write this statement on ALL sheets for existing/proposed landscape: 'Trees and Palms shall not be removed without first obtaining an approved Tree Removal Permit from the City of Hollywood.'

RESPONSE: Acknowledged. Note added to plans.

If you need any clarification on the revisions or responses received, please do not hesitate to reach out directly.

Regards,

Brandon M. White Landscape Architectural Services, LLC


Landscape Architectural Services, LLC 1708 SE Joy Haven Street, Port St. Lucie, FL 34983 Phone: (772) 834-1357 Email: brandon@las-fl.com

Landscape Notes:

- Alternative plant species for required landscape may be permitted subject to review and approval by the City of Hollywood Planning Department prior to installation.
- All prohibited exotic or invasive species shall be removed from the entire site prior to the issuance of a Certificate of Occupancy.
- All required landscaping shall be installed prior to the issuance of a Certificate of Occupancy.
- No Cypress Mulch is to be used on site. Eucalyptus or Melaleuca Mulch is to be used in a 3" consistent layer in all planting beds.
- Enhanced landscaping beyond minimum requirements will conform to all applicable sections of the City of Hollywood Landscape Manual.
- This plan has been designed to meet the tree planting requirements contained within the FPL document entitled 'Plant the Right Tree in the Right Place' and City of Hollywood Landscape Manual.
- For existing or proposed utilities, no tree shall be planted where it could, at mature height conflict with overhead power lines. - Tree species shall be selected as to minimize conflicts with existing or proposed utilities.
- See engineer's plans for all underground & overhead utilities and field locate all prior to installation; contact Landscape Designer/Owner regarding any conflicts.
- All site drainage by others.
- Landscape adjacent to vehicular traffic to be maintained to preserve site line visibility.


-Tree Relocation Note: Do not relocate without obtaining permit from the City of Hollywood. Existing tree(s) to be relocated require root pruning by a qualified professional prior to relocation. If the tree(s) does not survive after relocation and is dead or in poor health at time of final inspection, mitigation will be required through payment into the tree preservation fund, equal to \$350 per every 2" tree mitigation owed.

-Irrigation Note: Per Article 9: 9.4(4): Irrigation. All landscaped areas shall receive 100% coverage by means of an automatic sprinkler system designed and constructed in accordance with the City of Hollywood Code of Ordinances, the Florida Building Code, State Law, and the regulations of the South Florida Water Management District. Failure to maintain or disconnection of the irrigation system shall be a violation of these regulations.

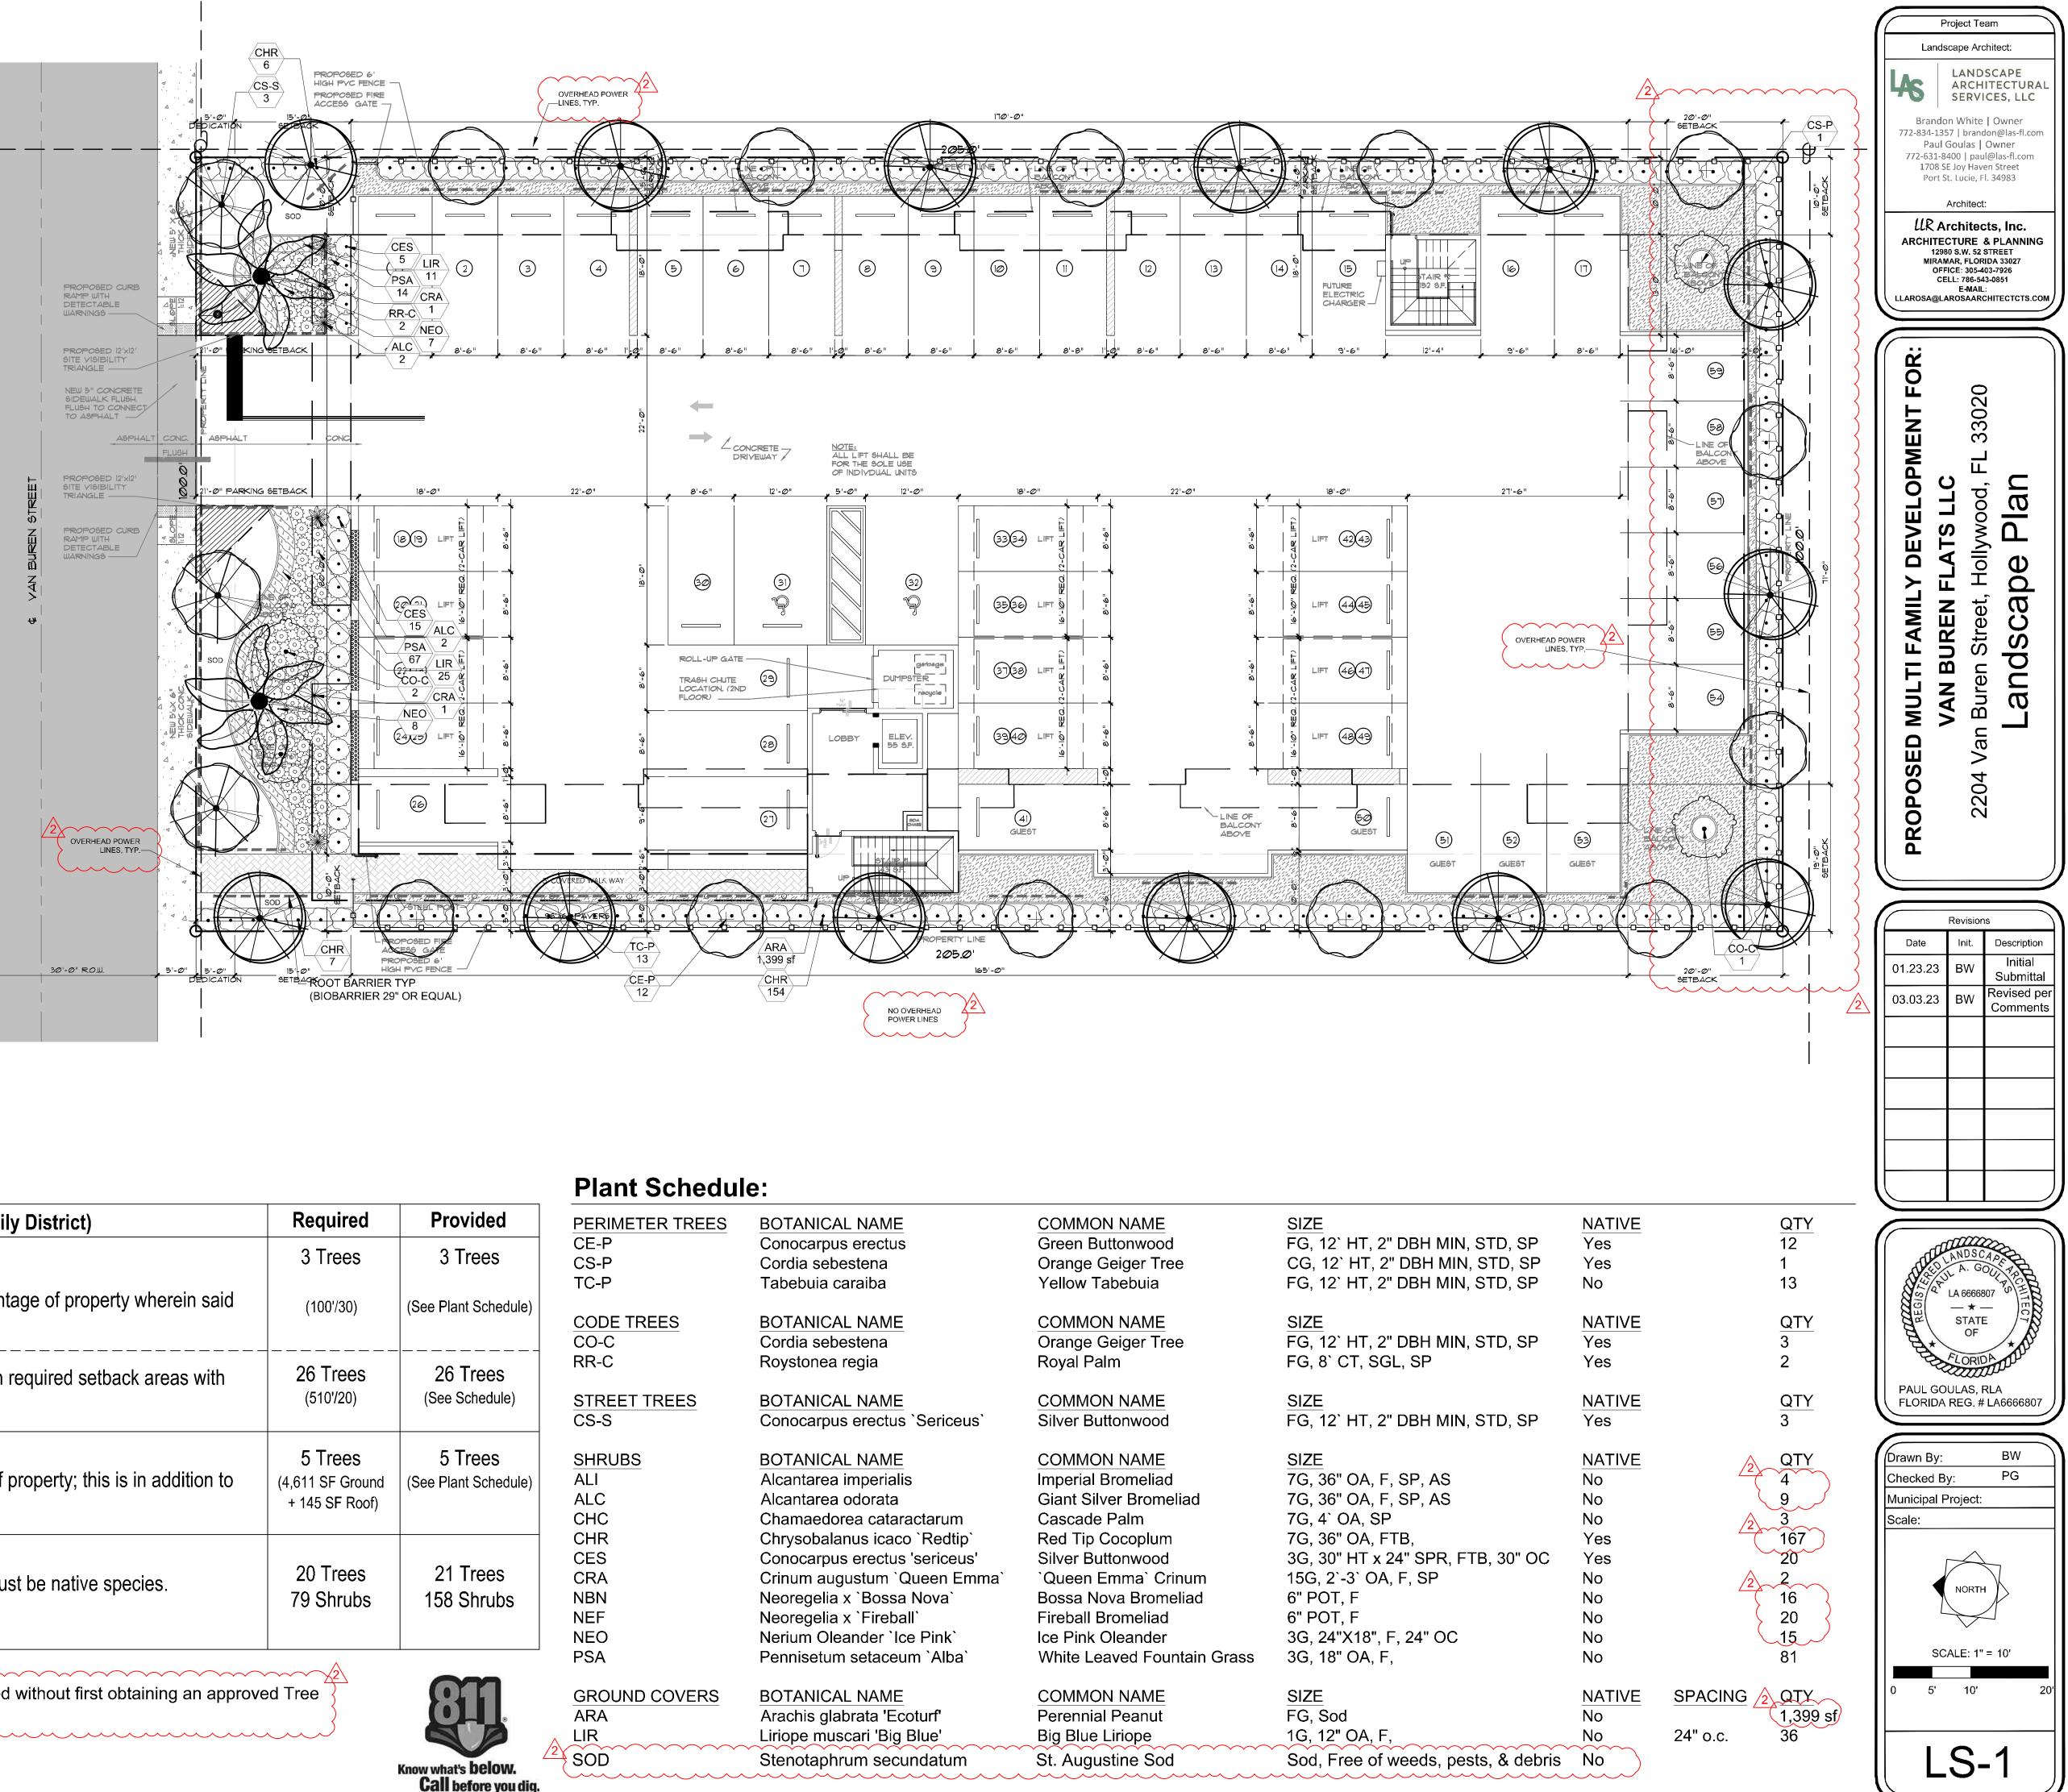

Landscape Data:			Plant Schedule:			
RAC Zoning - DH-2 (Dixie Highway Medium Intensity Multi-Family District)	Required	Provided	PERIMETER TREES	BOTANICAL NAME	COMMON NAME	SIZE
Perimeter Landscape	3 Trees	3 Trees	CE-P CS-P TC-P	Conocarpus erectus Cordia sebestena Tabebuia caraiba	Green Buttonwood Orange Geiger Tree Yellow Tabebuia	FG, 12` CG, 12` FG, 12`
One 12' street tree per 30 linear feet or portion thereof, of street frontage of property wherein said improvements are proposed.	(100'/30)	(See Plant Schedule)	CODE TREES CO-C	BOTANICAL NAME Cordia sebestena	<u>COMMON NAME</u> Orange Geiger Tree	<u>SIZE</u> FG, 12`
Residential Uses shall provide a five (5) foot landscape buffer within required setback areas with	26 Trees	26 Trees	RR-C	Roystonea regia	Royal Palm	FG, 8` C
one (1) tree for every 20 linear feet of required buffer area.	(510'/20)	(See Schedule)	STREET TREES CS-S	<u>BOTANICAL NAME</u> Conocarpus erectus `Sericeus`	COMMON NAME Silver Buttonwood	<u>SIZE</u> FG, 12`
Open Space A minimum of one (1) tree per 1,000 square feet of pervious area of property; this is in addition to tree requirement for parking lots and paved vehicular use area.	5 Trees (4,611 SF Ground + 145 SF Roof)	5 Trees (See Plant Schedule)	<u>SHRUBS</u> ALI ALC CHC	<u>BOTANICAL NAME</u> Alcantarea imperialis Alcantarea odorata Chamaedorea cataractarum	<u>COMMON NAME</u> Imperial Bromeliad Giant Silver Bromeliad Cascade Palm	<u>SIZE</u> 7G, 36" (7G, 36" (7G, 4` O
Native Requirements A minimum of 60% of required trees and 50% of required shrubs must be native species.	20 Trees 79 Shrubs	21 Trees 158 Shrubs	CHR CES CRA NBN NEF NEO	Chrysobalanus icaco `Redtip` Conocarpus erectus 'sericeus' Crinum augustum `Queen Emma` Neoregelia x `Bossa Nova` Neoregelia x `Fireball` Nerium Oleander `Ice Pink`	Red Tip Cocoplum Silver Buttonwood `Queen Emma` Crinum Bossa Nova Bromeliad Fireball Bromeliad Ice Pink Oleander	7G, 36" 3G, 30" 15G, 2`- 6" POT, 6" POT, 3G, 24">
Disclaimer: Trees and Palms shall not be removed without first obtaining an approv Removal Permit from the City of Hollywood.	$\Delta = \Delta$		PSA <u>GROUND COVERS</u> ARA LIR 2 SOD	Pennisetum setaceum `Alba` <u>BOTANICAL NAME</u> Arachis glabrata 'Ecoturf' Liriope muscari 'Big Blue' Stopotophrum socundatum	White Leaved Fountain Grass <u>COMMON NAME</u> Perennial Peanut Big Blue Liriope St. Augusting Sod	3G, 18" (<u>SIZE</u> FG, Sod 1G, 12" (Sod, Erc

Call before you dig.

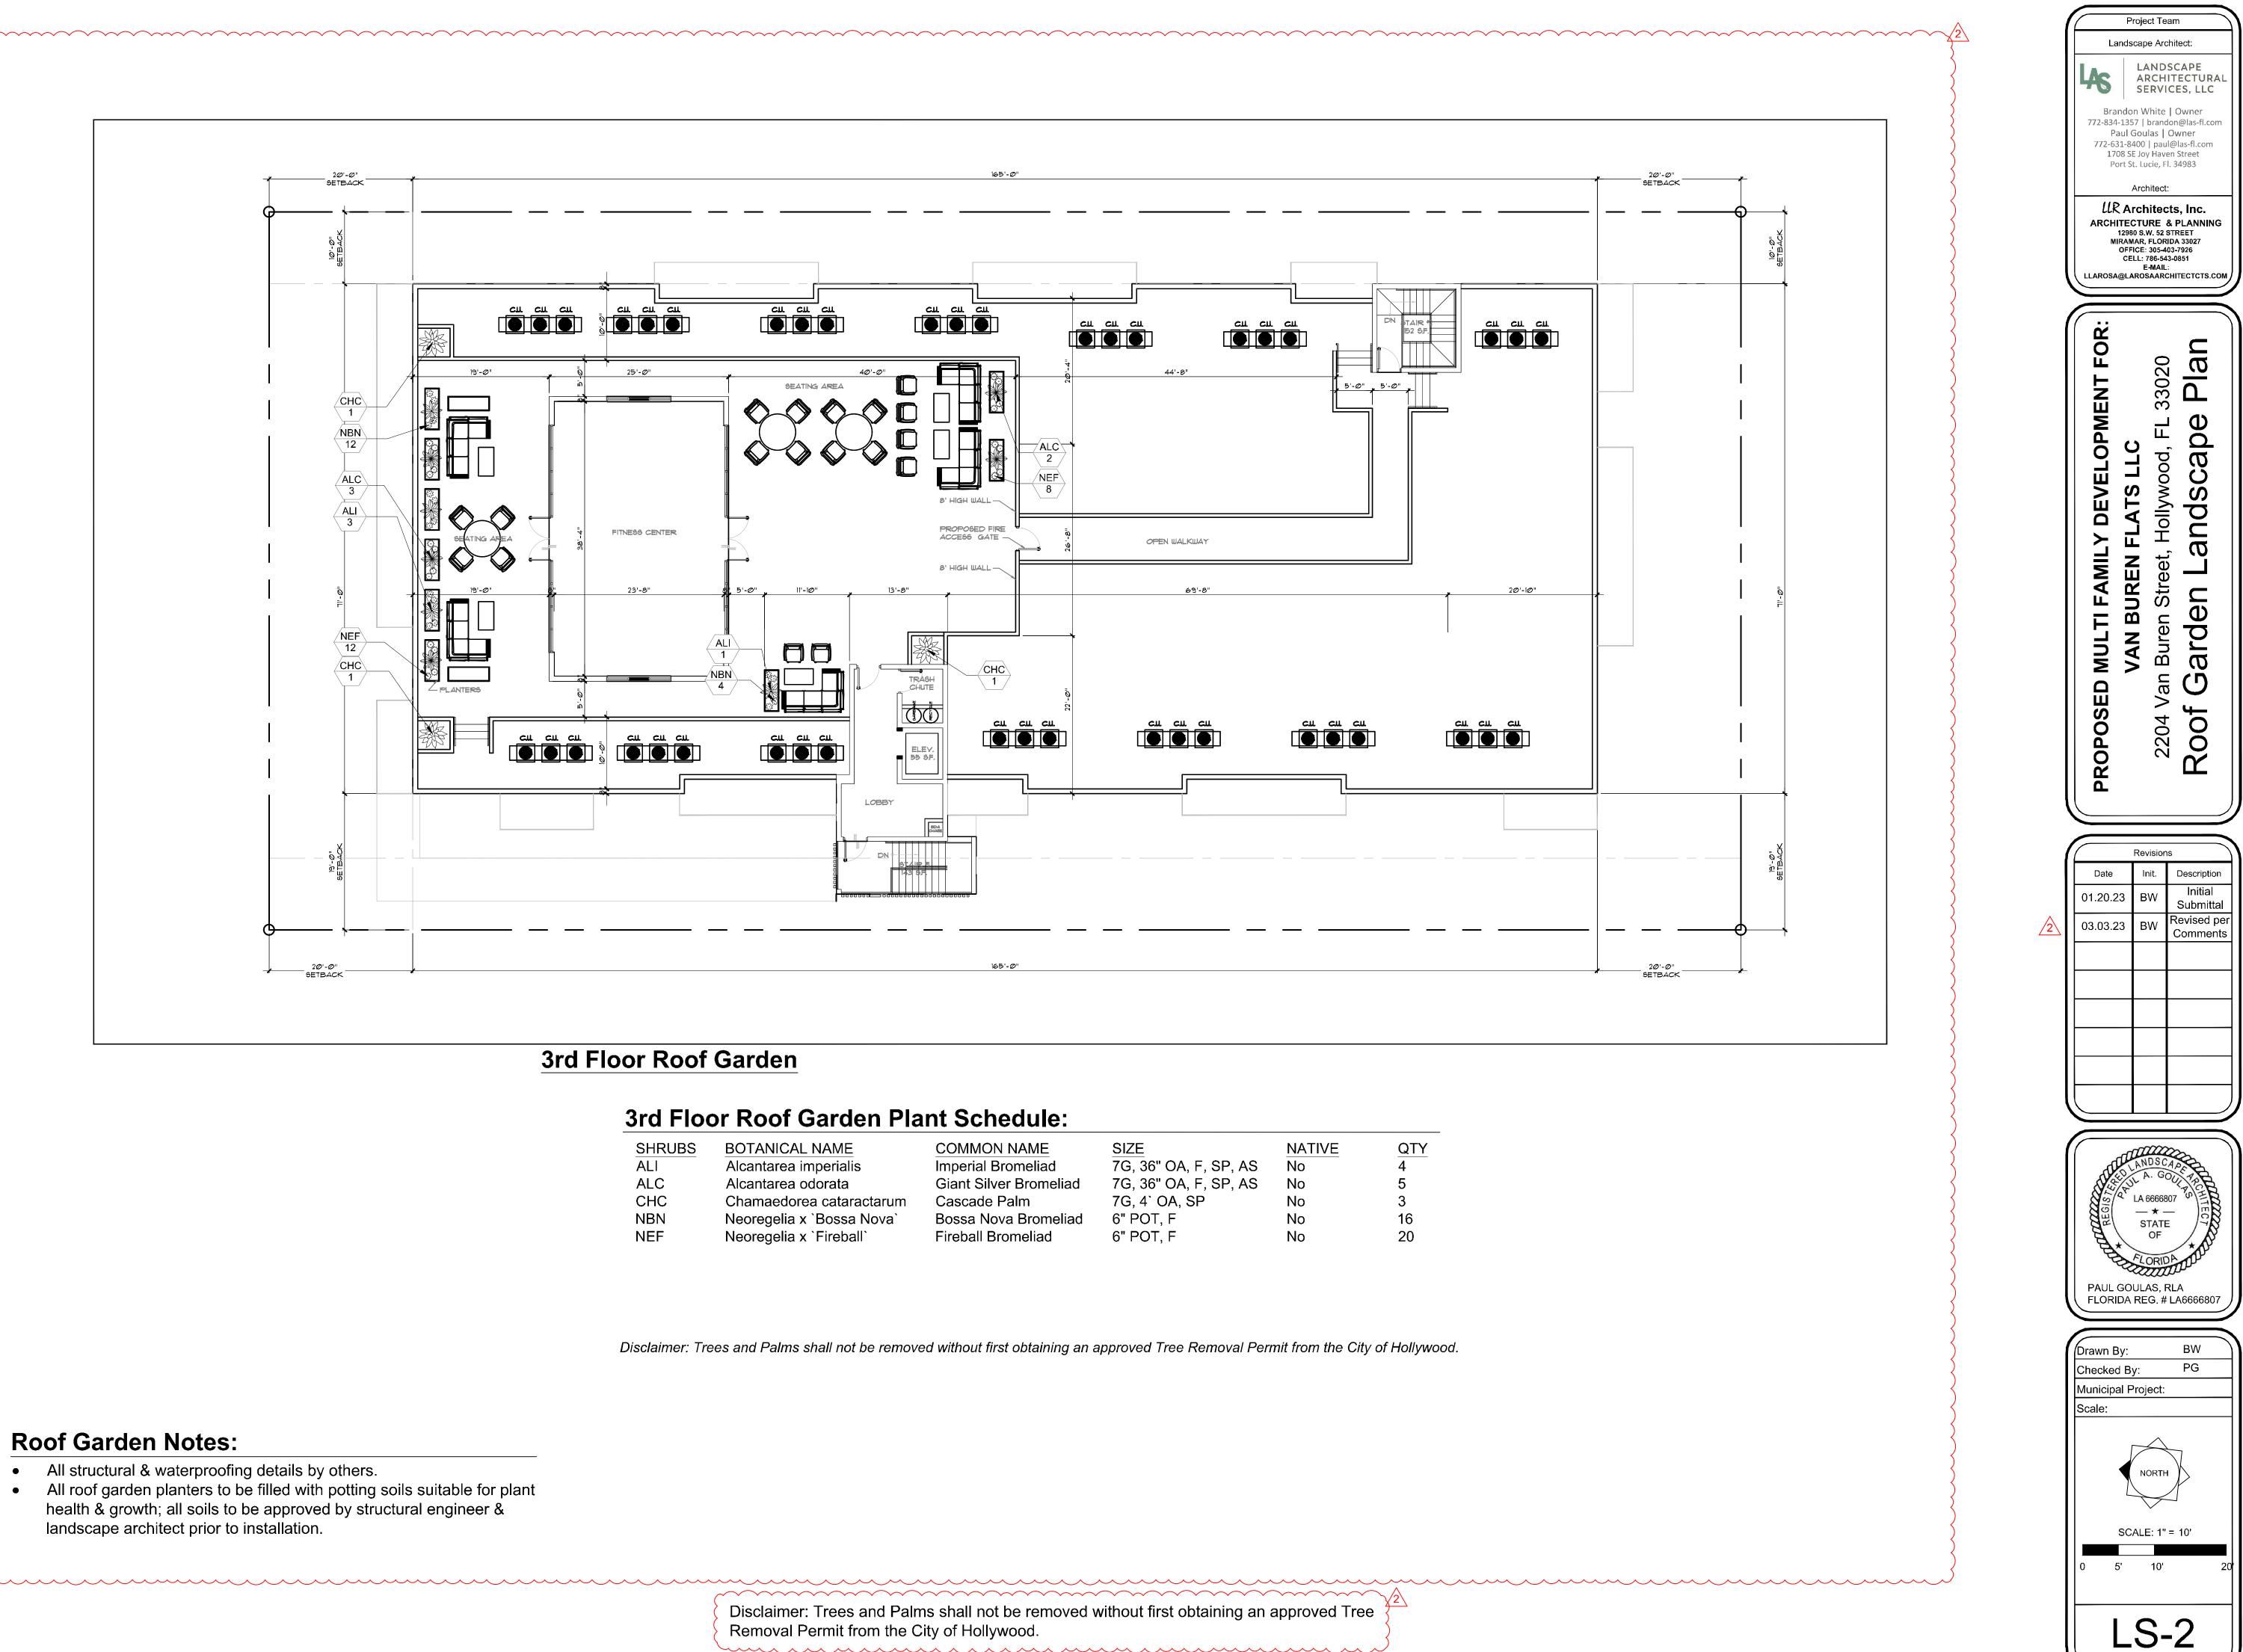


- All roof garden planters to be filled with potting soils suitable for plant

R	U	B	S
1			
<u> </u>			
C			
Ν			
F			

SIZE	NATIVE	QTY
7G, 36" OA, F, SP, AS	No	4
7G, 36" OA, F, SP, AS	No	5
7G, 4` OA, SP	No	3
6" POT, F	No	16
6" POT, F	No	20

Removal Permit from the City of Hollywood.

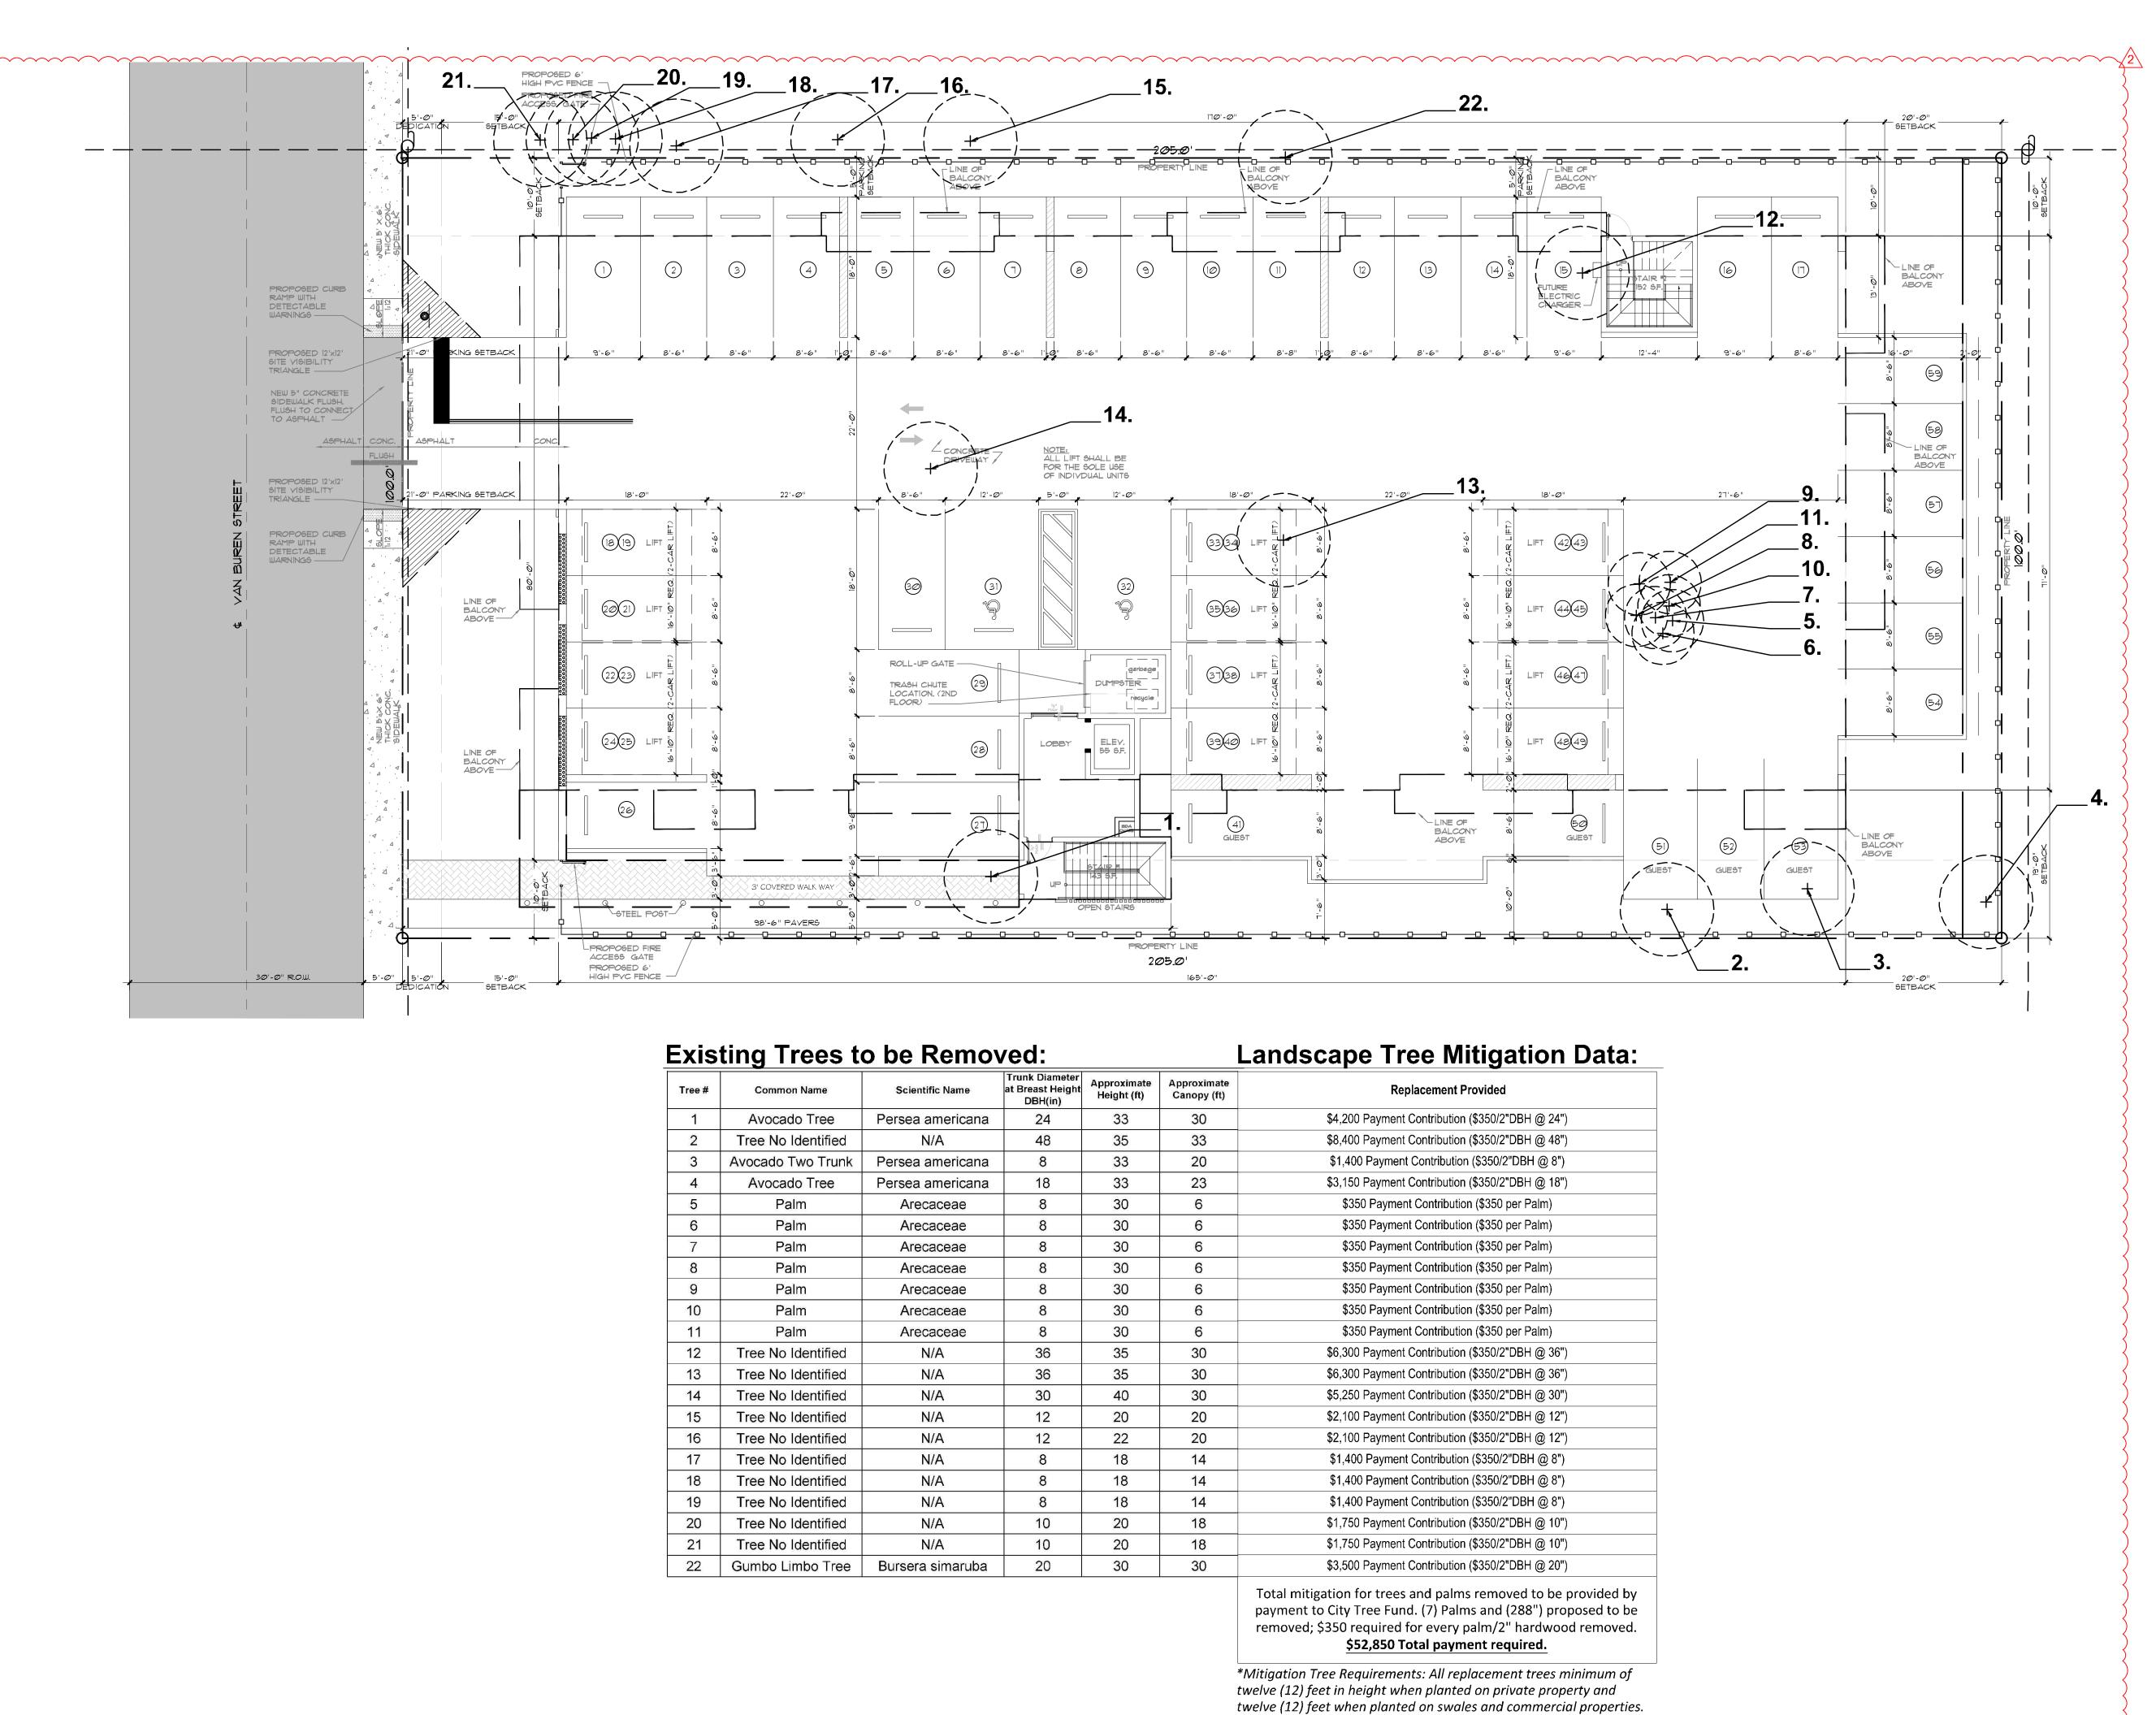


1100 #
1
2
2 3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20 21
21

Common Name	Scientific Name	Trunk Diameter at Breast Height DBH(in)	Approximate Height (ft)	Approximate Canopy (ft)	Replacement Provided
Avocado Tree	Persea americana	24	33	30	\$4,200 Payment Contribution (\$350/2"DBH @ 24")
Tree No Identified	N/A	48	35	33	\$8,400 Payment Contribution (\$350/2"DBH @ 48")
Avocado Two Trunk	Persea americana	8	33	20	\$1,400 Payment Contribution (\$350/2"DBH @ 8")
Avocado Tree	Persea americana	18	33	23	\$3,150 Payment Contribution (\$350/2"DBH @ 18")
Palm	Arecaceae	8	30	6	\$350 Payment Contribution (\$350 per Palm)
Palm	Arecaceae	8	30	6	\$350 Payment Contribution (\$350 per Palm)
Palm	Arecaceae	8	30	6	\$350 Payment Contribution (\$350 per Palm)
Palm	Arecaceae	8	30	6	\$350 Payment Contribution (\$350 per Palm)
Palm	Arecaceae	8	30	6	\$350 Payment Contribution (\$350 per Palm)
Palm	Arecaceae	8	30	6	\$350 Payment Contribution (\$350 per Palm)
Palm	Arecaceae	8	30	6	\$350 Payment Contribution (\$350 per Palm)
Tree No Identified	N/A	36	35	30	\$6,300 Payment Contribution (\$350/2"DBH @ 36")
Tree No Identified	N/A	36	35	30	\$6,300 Payment Contribution (\$350/2"DBH @ 36")
Tree No Identified	N/A	30	40	30	\$5,250 Payment Contribution (\$350/2"DBH @ 30")
Tree No Identified	N/A	12	20	20	\$2,100 Payment Contribution (\$350/2"DBH @ 12")
Tree No Identified	N/A	12	22	20	\$2,100 Payment Contribution (\$350/2"DBH @ 12")
Tree No Identified	N/A	8	18	14	\$1,400 Payment Contribution (\$350/2"DBH @ 8")
Tree No Identified	N/A	8	18	14	\$1,400 Payment Contribution (\$350/2"DBH @ 8")
Tree No Identified	N/A	8	18	14	\$1,400 Payment Contribution (\$350/2"DBH @ 8")
Tree No Identified	N/A	10	20	18	\$1,750 Payment Contribution (\$350/2"DBH @ 10")
Tree No Identified	N/A	10	20	18	\$1,750 Payment Contribution (\$350/2"DBH @ 10")
Gumbo Limbo Tree	Bursera simaruba	20	30	30	\$3,500 Payment Contribution (\$350/2"DBH @ 20")
				•	Total mitigation for trees and palms removed to be provided I

Palms minimum 8' clear trunk.

Disclaimer: Trees and Palms shall not be removed without first obtaining an approved Tree Removal Permit from the City of Hollywood.

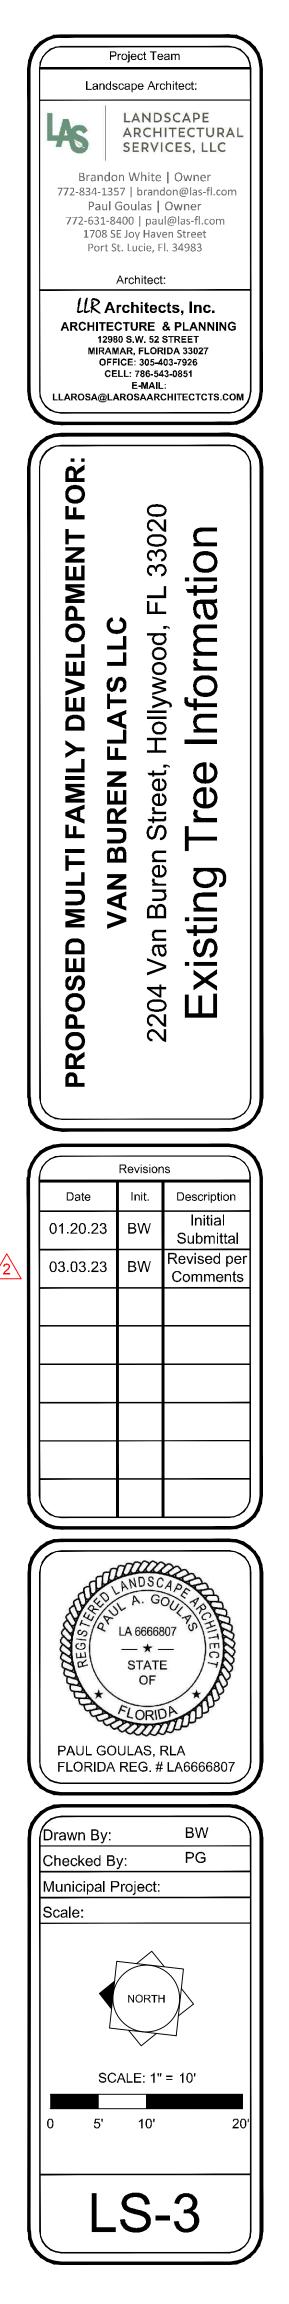

PART 1: GENERAL CONDITIONS

1.01 SCOPE:

- A. The landscape contract includes the supplying and planting of all trees, shrubs, vines, and ground cover together with all necessary labor, equipment, tools and materials needed for the successful completion, execution and maintenance of the landscape plans. 1.02 AGENCY STANDARDS: A. Grades and standards of plant materials to be used shall be true to name, size, condition and graded Florida #1 or better as stated in: Grades and Standards of Florida Plant Materials published by the
- State of Florida Department of Agriculture, Tallahassee, Florida. 1.03 SITE EXAMINATION: A. The Landscape Contractor shall personally examine the site and fully acquaint him/herself with all
- of the existing conditions in order that no mis-understanding may afterwards arise as to the character or extent of the work to be performed, and additionally, in order to acquaint him/herself with all precautions to be taken in order to avoid injury to property or persons. No additional compensation will be granted because of any unusual difficulties which may be encountered in the execution or maintenance of any portion of the work.
- 1.04 ERRORS AND OMISSIONS: A. The plant list is a part of the drawings and is furnished as a convenience. The plant list indicates the name, size and quantities of specific plant materials as called for and is located on the drawings. The Landscape Contractor is responsible for his/her own quantity count, and any discrepancy between drawings and plant list shall be considered as correct on the drawings.
- B. The Landscape Contractor shall not take advantage of errors or omissions in the specifications or contract drawings. Full instruction will be given if such errors are discovered. Upon the discovery of any discrepancies in, or omissions from the drawings or documents, or should the Landscape Contractor be in doubt as to their meaning, the Landscape Architect shall be notified and will determine the actions necessary to each query.
- C. If plans and specifications are found to disagree after the contract is awarded, the Landscape Architect shall be the judge as to which was intended.
- 1.05 EXECUTION OF THE WORK: A. The Landscape Contractor shall have his labor crews controlled and directed by a Foreman well versed in plant materials, planting methods, reading blueprints, and coordination between job and nursery in order to execute installation correctly and in a timely manner.
- B. The Landscape Contractor shall provide a competent English-speaking Foreman on the project at all times, who shall be fully authorized as the Contractor's agent on the work. The Superintendent shall be capable of reading and thoroughly understanding the Plans, Specifications and other Contract Documents. If the Superintendent is deemed incompetent by the Landscape Architect, he (the superintendent) shall be immediately replaced.
- C. The Landscape Contractor shall be available for any meetings with the Owner and/or Landscape Architect during implementation of the job. Any additional work or changes required as a result of failure to communicate with the Owner or Landscape Architect during implementation will be the responsibility of the Landscape Contractor.

1.06 PROTECTION OF PUBLIC AND PROPERTY:

A. The Landscape Contractor shall protect all materials and work against injury from any cause and shall provide and maintain all necessary safeguards for the protection of the public. He shall be held responsible for any damage or injury to persons or property which may occur as a result of his fault or negligence in the execution of the work, i.e. damage to underground pipes or cables.

- 1.07 CHANGES AND EXTRAS: A. The Contractor shall not start work on any changes or "extras" in the project until a written agreement setting forth the adjusted prices has been executed by the Owner and the Contractor. Any work performed on changes or "extras" prior to execution of a written agreement may or may not be compensated for by the Owner at his discretion.
- 1.08 GUARANTEE:
- A. The Landscape Contractor shall furnish a written guarantee warranting all materials, workmanship and plant materials, except sod, for a period of ONE (1) YEAR from the time of completion and acceptance by the Landscape Architect and Owner. Sod shall be guaranteed to 90 calendar days after acceptance by the Landscape Architect and Owner. All plant material shall be alive and in satisfactory condition and growth for each specific kind of plant at the end of the guarantee period. The guranteeing of plant material shall be construed to mean complete and immediate replacement with plant material of the same variety, type, size, quality and grade as that of the originally specified material. During the guarantee period it shall be the Landscape Contractor's responsibility to immediately replace any dead or unhealthy material as determined by the Landscape Architect. The guarantee will be null and void if plant material is damaged by lightning, hurricane force winds, or any other acts of God, as well as vandalism or lack of proper maintenance.
- B. At the end of the specified guarantee period, any plant required under this contract that is dead or not in satisfactory condition, as determined by the Landscape Architect, shall be replaced. The Landscape Contractor shall be responsible for the full replacement cost of plant materials for the first replacement and share subsequent replacement (s) costs equally with the Owner, should the replacement plant fail to survive.

1.09 CARE AND MAINTENANCE

- A. The Landscape Contractor shall be responsible for the care and maintenance of all plant materials and irrigation when applicable until final acceptance by the Owner or Landscape Architect.
- B. The Owner agrees to execute the instructions for such care and maintenance.

1.10 SAFETY:

- A. It shall be the responsibility of the Landscape Contractor to protect all persons from injury and to avoid property damage. Adequate warning devices shall be placed and maintained during the progress of the work
- B. It shall be the contractor's responsibility to conform to all local, state, and federal safety laws and codes including the Federal Occupational Safety And Health Act (O.S.H.A.) .

1.11 CONTRACTOR QUALIFICATION:

- A. The Owner may require the apparent contractor (s) to qualify him/herself to be a responsible entity by furnishing any or all of the following documentary data:
- A financial statement showing assets and liabilities of the company current to date. A listing of not less than (3) completed projects of similar scope and nature.
- Permanent name and address of place of business. 4. The number of regular employees of the organization and length of time the
- organization has been in business under the present name.
- 1.12 INSURANCE AND BONDING:
- A. The contractor (s) shall submit proof of insurance for this job for the time period that the work is done. The minimum amount of insurance shall be \$300,000.00 per person and \$300,000.00 per aggregate or as required by owner and agreed to in the contract The successful bidder shall be required to have this coverage in effect before beginning work on the site.
- B. The Owner shall have the right to require the Contractor to furnish bonds covering faithful performance of the Contract and payment obligations arising thereunder as stipulated in bidding requirements or specifically required in the Contract Documents on the date of execution of the Contract.
- 1.13 PERMITS AND CERTIFICATES: A. All contractors shall secure and pay for all permits and certificates required for his/her
- class of work.

PART 2: MATERIALS

- 2.01 PLANT MATERIALS A. A complete list of plants is shown on the drawings, including a schedule of quantities, sizes, and such other requirements deemed necessary. In the event discrepancies occur, the specifications on the drawings shall govern.
- B. Substitutions: Substitutions of plant materials or changes in size or spacing of materials will be permitted ONLY upon written authorization by the Owner or the Landscape Architect. If plant material is not of sufficient size to meet applicable codes, a letter of variance from the appropriate agency must be obtained by the Contractor prior to issuance of any change order. If material of smaller size is to be accepted, the quantity of material shall be increased, at no additional cost to the Owner, to meet the intent of the drawings.
- C. All plant materials shall have a habit of growth that is normal for the species and shall be healthy, vigorous and equal to or exceed the measurements specified in the plant list, which are the minimum acceptable sizes. Plants shall be measured before pruning with branches in normal position. Any necessary pruning shall be done at the time of planting.
- D. All plant materials shall be nursery grown, unless otherwise noted, Florida #1 or better and shall comply with all required inspections, grading standards and plant regulations as set forth by the Florida Department of Agriculture's Grades and Standards for Nursery Plants, most current addition and Grades and Standards for Nursery Plants most current addition
- E. Plants that do not have the normal balance of height and spread typical for the respective plant shall not be acceptable.
- F. The Landscape Contractor shall install each plant to display its best side. Adjustments may be required if plants are not installed properly and/or approved by the Landscape Architect at no additional cost to owner

cord, rope, or wire mesh. All collected plants shall be balled and burlapped. B. Plants with broken, damaged or insufficient rootballs will be rejected. C. All plant material shall be protected from possible bark injury or breakage of branches. All damage to plants.

2.03 PROTECTION OF PLANT MATERIALS:

2.02 INSPECTION

- D. Plants which cannot be planted immediately on delivery to the site shall be covered with moist necessary by the Landscape Contractor until planted.
- 2.04 STORAGE: A. All plant materials shall be stored on the site in designated areas, specified by the Landscape Architect or Owner's agent.
- B. No plant material shall be stored longer than seventy-two (72) hours unless approved by by Landscape Architect and/or owner.
- C. The Landscape Architect reserves the right to reject any plant materials not in conformance with these specifications.
- D. All rejected material shall be immediately removed from the site and replaced with acceptable material at no cost to the Owner.
- 2.05 PROTECTION DURING PLANTING: A. Trees moved by winch or crane shall be thoroughly protected from chain marks, girdling or bark attached to the tree with nails.
- 2.06 PLANTING SOIL: be detrimental to good growth.
- 2.07 FERTILIZER: the manufacturer's guaranteed analysis. Any fertilizer that becomes caked or otherwise damaged
- shall be rejected B. Thoroughly mixed 3 lbs. of commercial fertilizer

accordance with the following rates:

1 gallon container 1 tablet 3 gallon container 2 tablets 5 gallon container 3 tablets 5 tablets 7 gallon

Large tubs, wire baskets, grow bags, and balled and burlapped material shall have 1 tablet for each 1/2 inch of trunk diameter (measured 3 feet from ground) or for each foot of height or spread of larger shrub material. The Landscape Architect reserves the right to inspect and review the application of fertilizer.

2.08 MULCH:

- to prevent wind displacement. Cypress &/or Red mulch is prohibited. B. All trees and shrub beds shall receive 3" mulch immediately after planting and thoroughly watered.
- or as required by local jusidiction. PART 3: EXECUTION
- 3.01 DIGGING:
- caused by his work.
- 3.02 GRADING:
- A. Grading for drainage, swales, etc. to within 4 inches of the finished grade to be provided by others.

3.03 PLANTING

- A. Planting shall take place during favorable weather conditions. precautions can be taken not to damage or encroach on them.
- C. Tree Planting shall be located where it is shown on the plan. No planting holes shall be
- D. Excavation of holes shall extend to the required subgrades as specified on the planting diagrams
- conforms to the aforementioned "Tree and Shrub Planting Diagrams".
- and requirements.
- F. Planting pits shall be excavated to the following dimensions and refilled with a mixture of (1/2) planting soil (1/2) existing native soil]; 1 Gallon material (1 gal.): 12" x 12" x 12" min. 3 Gallon material (3 gal.): 20" x 20" x 18" min. Lerio material (7 gal.): 30" x 30" x 24" min.
- G. No planting or laying of sod shall be initiated until the area has been cleaned of existing sod or and approved by Landscape Architect or owner's rep.
- I. All plants shall be set to ultimate finished grade. No filling will be permitted around trunks or

from hole before filling in

- J. All flagging ribbon shall be removed from trees and shrubs before planting.
- dressed two (2") inches deep with topsoil raked and left in a neat, clean manner.
- 3.04 PRUNING plant's natural character.
- B. Make all cuts with sharp instruments flush with trunk or adjacent branch, in such a manner as to
- C. Trees shall not be poled or topped.
- D. Remove all trimmings from site.

Disclaimer: Trees and Palms shall not be removed without first obtaining an approved Tree Removal Permit from the City of Hollywood.

A. The Landscape Architect and Owner may inspect trees and shrubs at place of growth or at site before planting, for compliance with requirements for genus, species, variety, size and quality. The Landscape Architect and Owner retain the right to further inspect trees and shrubs for size and condition of balls and root systems, insects, injuries and latent defects, and to reject unsatisfactory or defective material at any time during progress of work. Rejected plant materials shall be immediately removed from project site.

A. Balled and burlapped plants (B & B) shall be dug with firm natural balls of earth of sufficient diameter and depth to encompass the fibrous and feeding root system necessary for full recovery of the plant. Balls shall be firmly wrapped with burlap similar materials and bound with

plants transported by open trucks shall be adequately covered to prevent windburn, drying or

soil, mulch or other protection from the drying of wind and sun. All plants shall be watered as

slippage by means of burlap, wood battens or other approved methods. Battens shall NOT be

A. Planting soil for all plantings shall consist of existing native soil and shall be free of debris, roots, clay, stones, plants or other foreign materials which might be a hindrance to planting operations or

A. Commercial fertilizer shall comply with the state fertilizer laws. Nitrogen shall not be less than 40% from organic source. Inorganic chemical nitrogen shall not be derived from the sodium form of nitrate. Fertilizers shall be delivered to the site in unopened original containers, each bearing

to each cubic yard of planting soil.

C. Tabletized fertilizer shall be Agriform planting tablets 20-10-5 formula, 21 gram or equal. All trees and shrubs shall be fertilized with tabletized fertilizer as follows. While backfilling plant holes, fertilizer tablets shall be equally spaced and placed adjacent to the ball mid-way in depth in

A. Mulch material shall be clean, dry, free of weeds, seeds and pests, moistened at the time of application

Apply 2" max on tree & palm rootballs, keep away from tree & palm trunks

The Landscape Contractor shall exercise care in digging and other work so as not to damage existing work, including overhead wires, underground pipes and cables and the pipes and hydrants of watering systems. Should such overhead or underground obstructions be encountered which interfere with planting, the Owner shall be consulted and contractor will adjust the location of plants to clear such obstruction. The Contractor shall be responsible for the immediate repair of any damage

B. It shall be the responsibility of the Landscape Contractor to provide the final grading during the course of landscape installation so as to bring sod and planting areas to their proper elevations in relation to walks, paying, drain structures, and other site conditions. The site grading plan must be checked prior to installation of sod to insure that drainage and other conditions will NOT be modified.

B. The Contractor shall call for utility locates and ascertain the location of all utilities and easements so proper

dug until the proposed locations have been staked on the ground by the Contractor.

located in the planting plans. Plant pits shall be circular in outline and shall have a profile which

E. A representative number of planting pits (a minimum of one in every 25 feet throughout the entire site) shall be tested for proper drainage. See Landscape Plan for complete testing methods

Field grown material and trees: 1-1/2 times width of ball and depth of ball plus 12" min.

other plant materials, rough grass, weeds, debris, stones etc. and the ground has been brought to an even grade, with positive drainage away from buildings and towards drain inlets and swales H. Each plant shall be planted in an individual hole as specified for trees, shrubs, and vines.

stems. All ropes, wire, stakes, etc., shall be removed from sides and top of the ball and removed

K. Excess excavation (fill) from all holes shall be removed from the site, at no additional expense to

L. All palms shall be backfilled with sand, thoroughly washed in during planting operations and with a shallow saucer depression left at the soil line for future waterings. Saucer areas shall be top-

A. Remove dead and broken branches from all plant material. Prune to retain typical growth habit of individual plants with as much height and spread as possible in a manner which will preserve the

insure elimination of stubs. Cuts made at right angles to line of growth will not be permitted.

3.05 GUYING

- A. All trees over six (6') feet in height shall, immediately after setting to proper grade, be guyed with three sets of two strands, No. 12 gauge malleable galvanized iron, in tripod fashion. See Detail.
- B. Wires shall not come in direct contact with the tree but shall be covered with an approved protection device at all contact points. Wires shall be fastened in such a manner as to avoid pulling crotches apart.
- D. Stake & Brace all treess larger than 12' oa. See detail. Stakes shall be 2" x 2" lumber of sufficient length to satisfactorily support each tree.
- E. Turnbuckles for guying trees shall be galvanized or cadmium plated and shall be of adequate size and strength to properly maintain tight guy wires.
- 3.06 WATER: A. Each plant or tree shall be thoroughly watered in after planting. Watering of all newly installed plant materials shall be the responsibility of the Landscape Contractor until final acceptance by the I andscape Architect.
- B. See General Notes of Landscape Plan for water source.

3.07 SOD:

- A. The Landscape Contractor shall sod all areas indicated on the drawings.
- B. It shall be the responsibility of the Landscape Contractor to fine grade all landscape areas, eliminating all bumps, depressions, sticks, stones, and other debris
- C. The sod shall be firm, tough texture, having a compacted growth of grass with good root development. It shall contain no noxious weeds, or any other objectionable vegetation. fungus, insects, or disease. The soil embedded in the sod shall be good clean earth, free from stones and debris.
- Before being cut and lifted, the sod shall have been mowed at least three times with a lawn mower, with the final mowing not more than seven days before the sod is cut. The sod shall be carefully cut into uniform dimensions.
- E. 6-6-6 fertilizer with all trace elements is to be applied at the rate of 40 lbs. per 1,000 sq. ft. prior to laying sod.
- F. Solid sod shall be laid with closely abutting, staggered joints with a tamped or rolled, even surface. G. The finished level of all sod areas after settlement shall be one (1") inch below the top of abutting
- walks, paving and wood borders to allow for building turf. H. If in the opinion of the Landscape Architect, top dressing is necessary after rolling, clean yellow sand will be evenly applied over the entire surface and thoroughly washed in.

3.08 SEEDING:


- A. The Landscape Contractor shall remove all vegetation and rocks larger than (1") in diameter from areas to be seeded, scarify the area, then apply fertilizer at a rate of 500 lbs. per acre.
- B. Application: Argentine Bahia Grass seed 200 Pounds per acre mixed with common hulled Bermuda seed - 30 lbs. per acre. All other seed mixtures shall be applied per the manufacturer's instructions.
- C. Roll immediately after seeding with a minimum 500 pound roller, then apply straw mulch at the rate of 2,500 pounds per acre.
- D. Apply fertilizer at the rate of 150 lbs. per acre 45-60 days after seeding.
- 3.09 CLEANING UP: A. The contractor shall at all times keep the premises free from accumulations of waste materials or rubbish caused by his employees or work. He shall leave all paved areas "broom clean" when completed with his work.
- 3.10 MAINTENANCE: A. Maintenance shall begin immediately after each plant is installed and shall continue until all planting has been accepted by the Owner or Landscape Architect. Maintenance shall include watering, weeding, removal of dead materials, resetting plants to proper grades or upright positions, spraying, restoration of planting saucer and/or any other necessary operations.
- B. Proper protection to lawn areas shall be provided and any damage resulting from planting operations shall be repaired promptly.
- C. Replacement of plants during the maintenance period shall be the responsibility of the Contractor. excluding vandalism or damage on the part of others, lighting, or hurricane force winds, until final acceptance.
- D. In the event that weeds or other undesirable vegetation become prevalent, it shall be the Contractor's responsibility to remove them.
- E. Trees or other plant material which fall or are blown over during the maintenance period will be reset by the Contractor at no additional expense to the Owner, the only exception being hurricane force winds.
- 3.11 COMPLETION, INSPECTION AND ACCEPTANCE: A. Completion of the work shall mean the full and exact compliance and conformity with the provisions expressed or implied in the Drawings and in the Specifications, including the complete removal of all trash, debris, soil or other waste created by the Landscape Contractor.
- B. Inspection of work to determine completion of contract, exclusive of the possible replacement of plants, will be made by the Owner and/or Landscape Architect at the conclusion of all planting and at the request of the Landscape Contractor.
- All plant material shall be alive and in good growing condition for each specified kind of plant at the time of acceptance. The rating of each plant according to Florida Grades and Standards shall be equal to or better than that called for on the plans and in these Specifications at the time of final inspection and acceptance.
- D. After inspection, the Landscape Contractor will be notified by the Owner of the acceptance of all plant material and workmanship, exclusive of the possible replacement of plants subject to quarantee.

DRAINAGE TESTING/DRAINAGE CHANNEL REQUIREMENTS


PRIOR TO PLANTING ALL PLANTING PITS SELECTED FOR TESTING SHALL BE TESTED IN THE FOLLOWING MANNER


A. DIG EACH PLANTING PIT TO THE MINIMUM SPECIFIED SIZE.

- B. FILL PLANTING PIT WITH TWELVE INCHES (12") OF WATER. IF THE WATER LEVEL DROPS FOUR (4") OR MORE WITHIN FOUR (4) HOURS, THE DRAINAGE IS SUFFICIENT AND A DRAINAGE CHANNEL IS NOT REQUIRED IF THE WATER LEVEL DROPS LESS THAN FOUR INCHES (4") WITHIN THE FOUR (4) HOUR PERIOD, A DRAINAGE CHANNEL IS REQUIRED.
- C. WHERE REQUIRED, THE DRAINAGE CHANNEL MUST EXTEND DOWN THROUGH THE NON POROUS SOIL AND INTO POROUS SOIL. (SEE DETAIL)
- D. ALL MATERIAL REMOVED FROM THE DRAINAGE CHANNEL SHALL BE DISCARDED.
- E. WHEN BACKFILLING PLANTING PITS WITH PLANTING MIXTURE, CARE MUST BE TAKEN TO KEEP THE CONSISTENCY OF THE SOIL MIX THE SAME THROUGHOUT THE PLANTING PIT AND DRAINAGE CHANNEL.




OVERALL DIMENSION TO

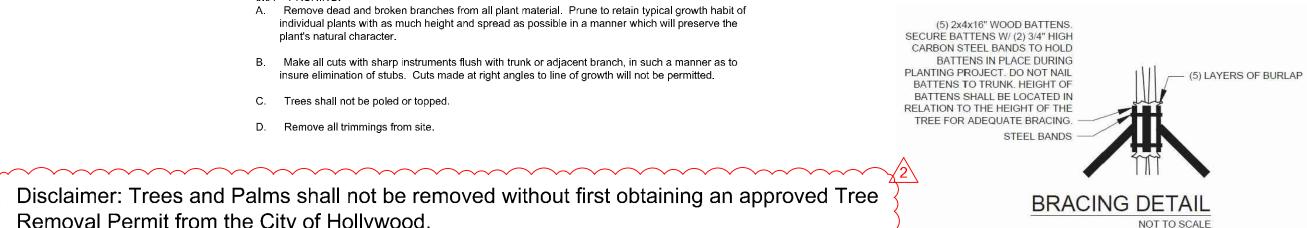



DRAINAGE TESTING DETAIL

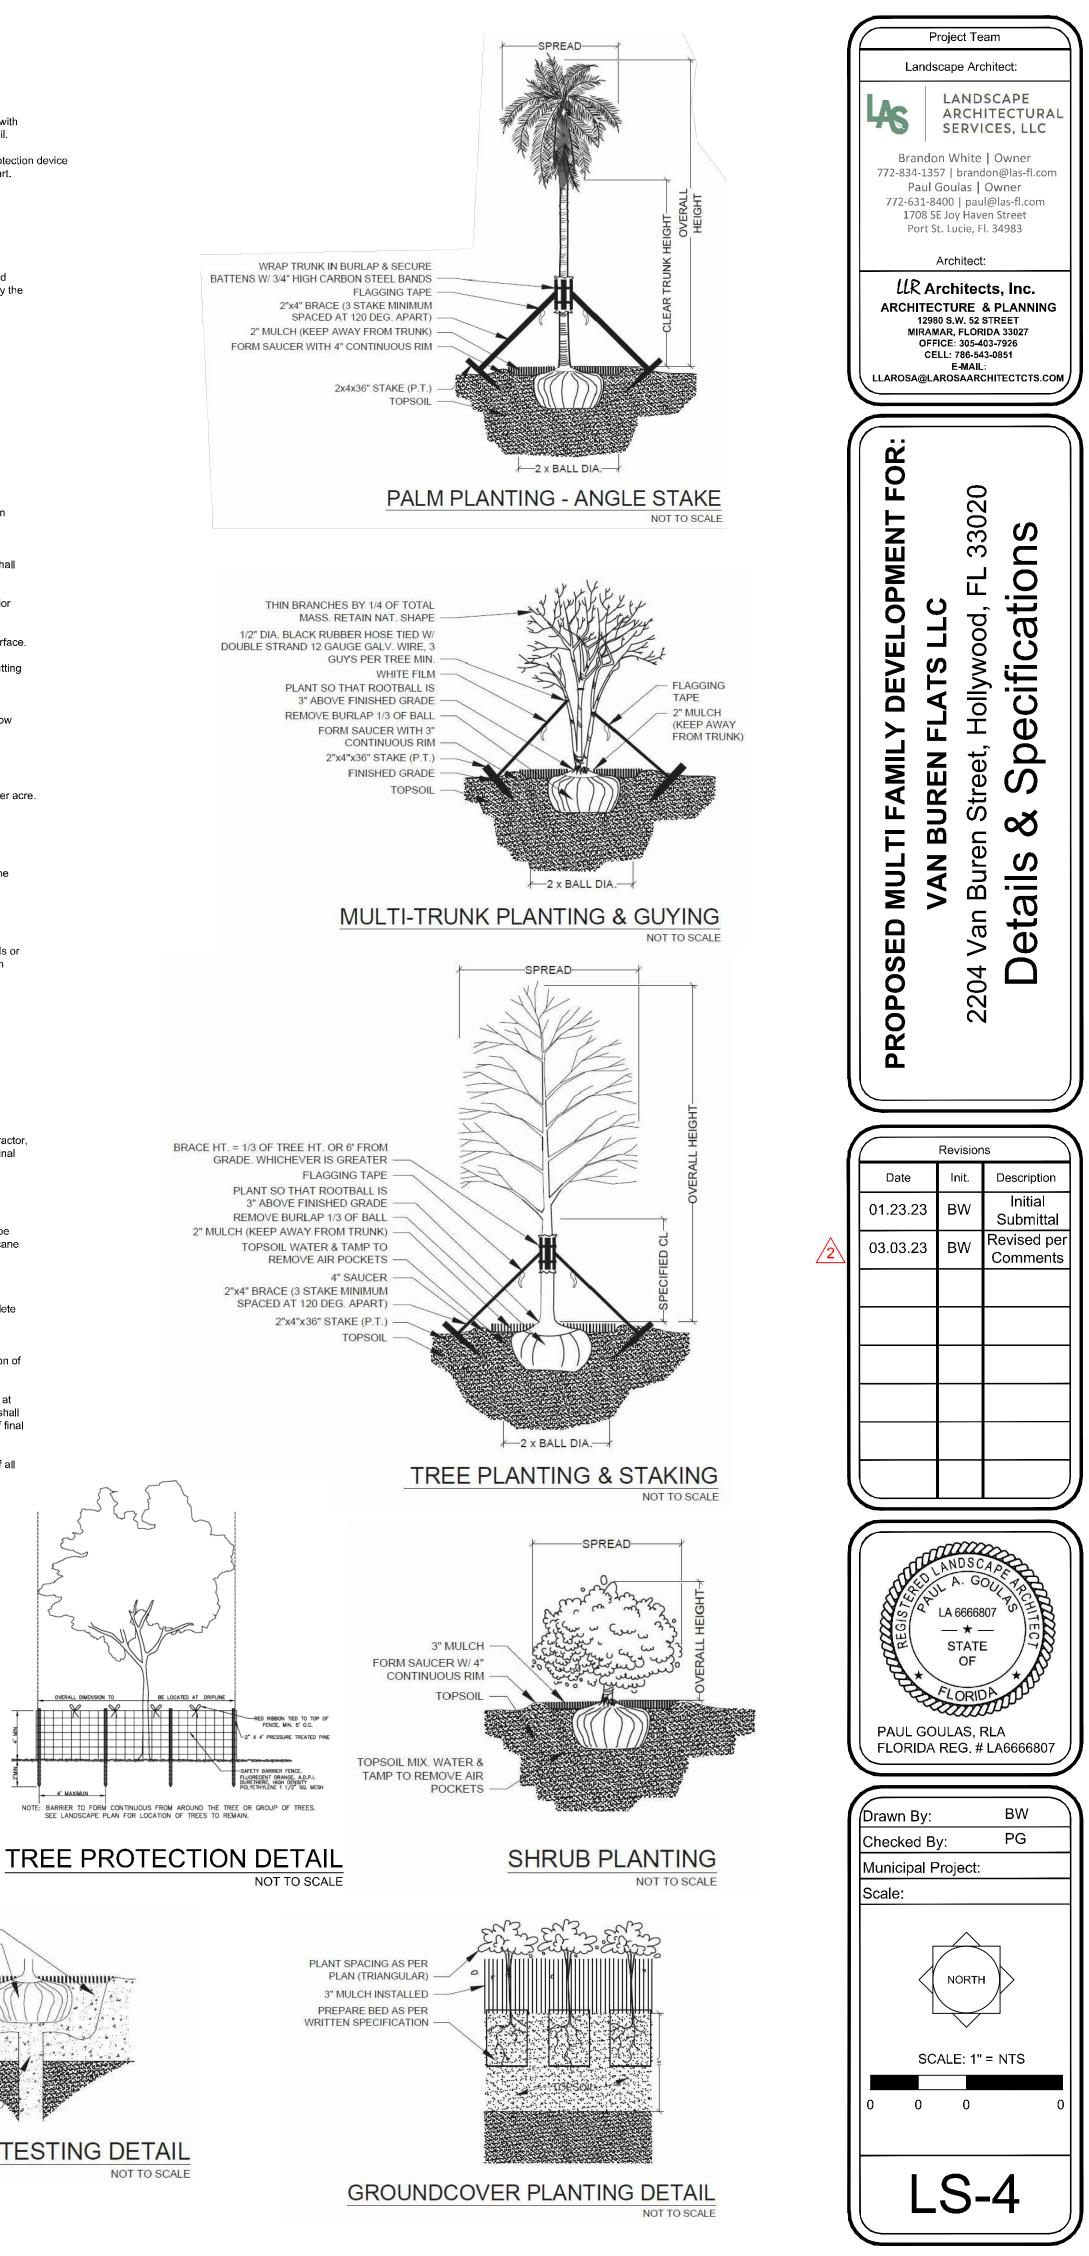

NOT TO SCALE



