



BOULEVARD HEIGHTS IN-FILL SIDEWALK PROJECT

CITY OF HOLLYWOOD, FLORIDA.

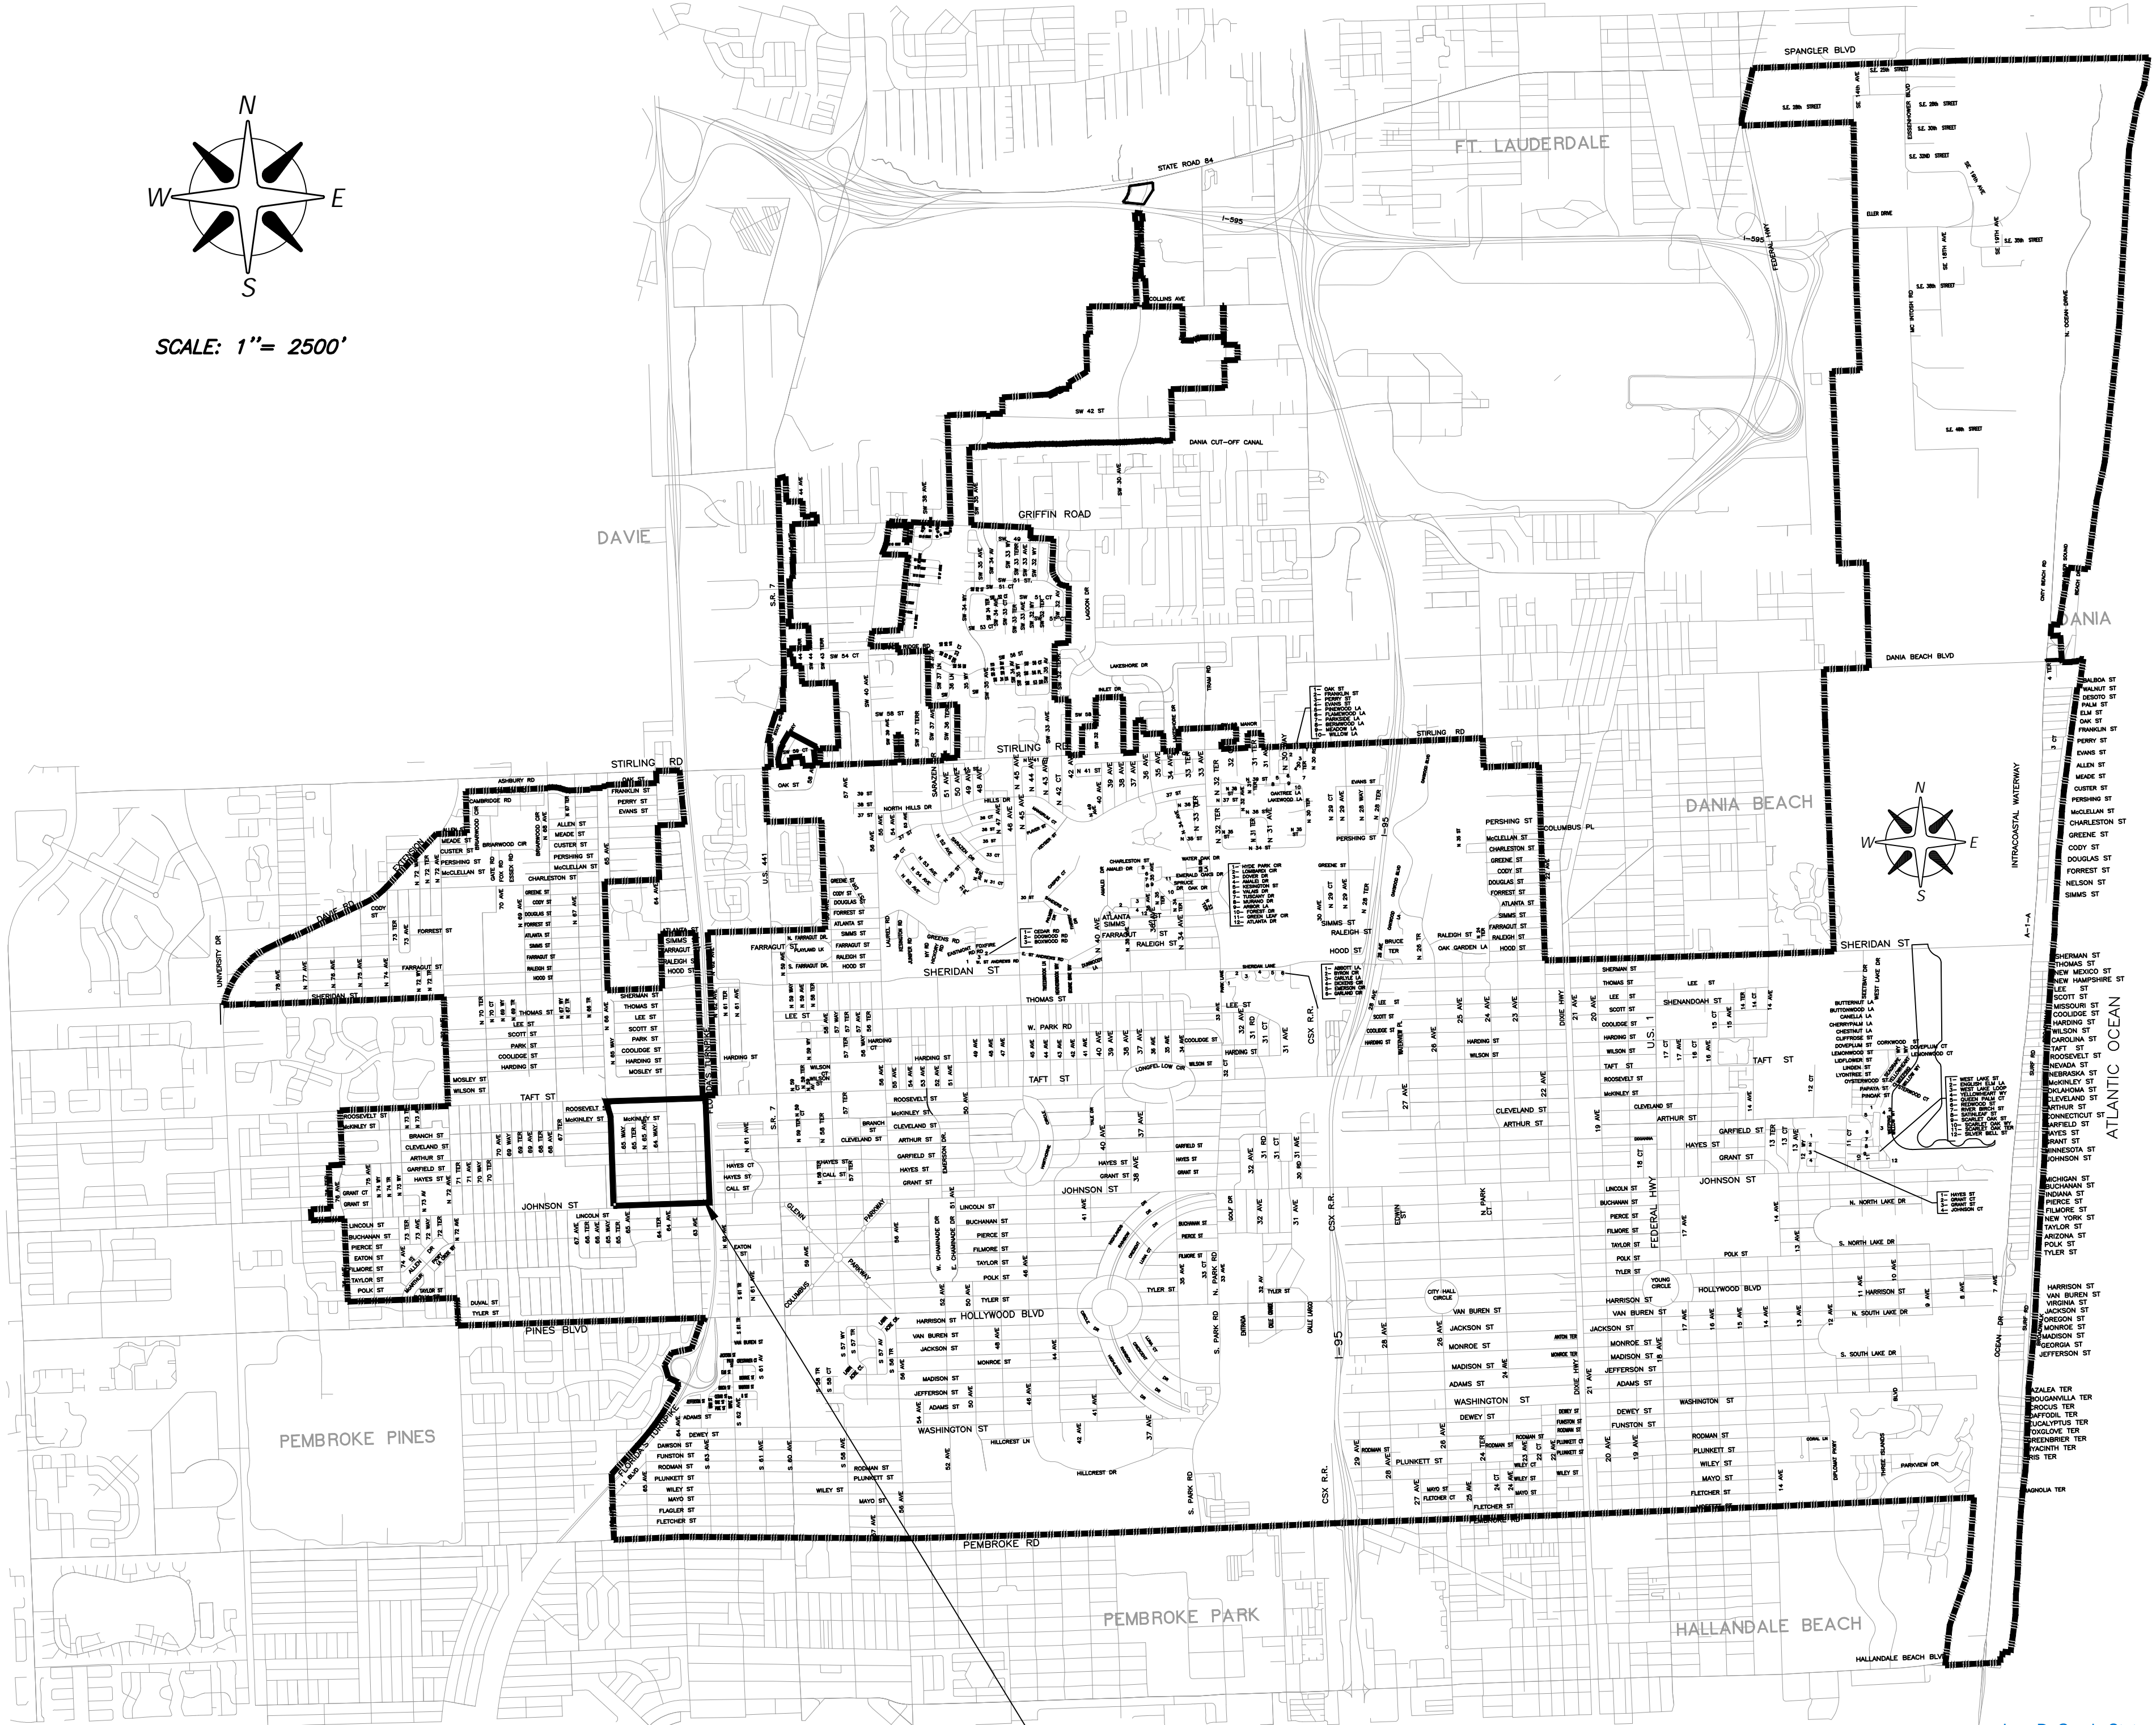

INDEX OF SHEETS	
SHEET NO.	DESCRIPTION
CVR	COVER SHEET
SP-1	PROPOSED SITE PLAN
DETAILS	SIDEWALK AND CROSS SECTION DETAILS

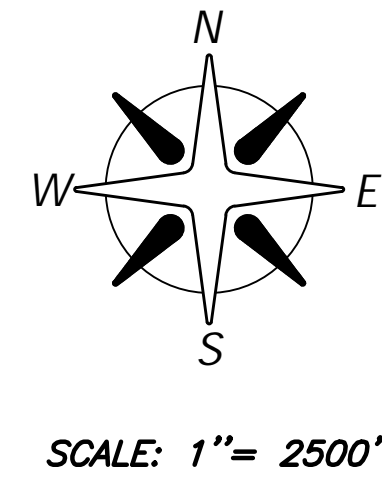

SCOPE OF WORK:

1. NEW SIDEWALK INSTALLED TOTAL: 28,444 LF
2. ALL SIDEWALK CONSTRUCTION SHALL FOLLOW COH SIDEWALK STANDARD DETAILS AND 50' BOULEVARD HEIGHTS TYPICAL CROSS SECTION.
3. CONCRETE TO BE CLASS 1, 3,000 PSI
4. USE OF FIBER REINFORCED CEMENT IS PROHIBITED.
5. CONCRETE SIDEWALK WILL BE 4" THICK MINIMUM (TYP.), 6" THICK AT DRIVEWAYS, EXTENDED TWO FEET BEYOND DRIVE, ON BOTH SIDES.
6. SIDEWALK CONCRETE FINISH: LIGHT BROOM FINISH PERPENDICULAR TO THE DIRECTION OF SIDEWALK.
7. ALL SIDEWALK CONSTRUCTION SHALL BE IN STRICT ACCORDANCE WITH THE CONTRACT SPECIFICATIONS.
8. SIDEWALK SLOPES SHALL MEET THE REQUIREMENTS OF THE AMERICAN WITH DISABILITIES ACT.
9. CONSTRUCTION EXPANSION JOINTS AT SPACING SHOWN IN THE SIDEWALK DETAILS: AT POINT OF CURVATURE, AT ADJOINING STRUCTURES, AT THE END OF DAYS WORK, AND WHERE NEW SIDEWALK MEETS EXISTING SIDEWALK.
10. PEDESTRIAN PATHWAYS WITH RUNNING SLOPES STEEPER THAN 20:1 ARE CONSIDERED RAMPS. RAMPS RUNNING SLOPES SHALL NOT EXCEED 12:1. RAMP CROSS SLOPES SHALL NOT EXCEED 0.02.
11. ELEVATION OF THE BACK OF NEW CONCRETE SIDEWALK TO BE A MIN. OF 0.1 FT ABOVE CROWN OF ROAD.

GENERAL NOTES:

1. PRIOR TO CONSTRUCTION, THE CONTRACTOR SHALL NOTIFY:
 SUNSHINE _____ 1-800-432-4770
 F.P. & L. _____ 1-800-749-9203
 BELL SOUTH (CALL SUNSHINE) _____ 1-800-432-4770
 TECO PEOPLES GAS _____ (954) 453-0777
 A.T.&T. OF SOUTH FLORIDA _____ (954) 921-1773x222

CITY OF HOLLYWOOD

ENGINEERING INSPECTOR _____ (954) 921-3900
 UNDERGROUND UTILITIES _____ (954) 921-3046

BROWARD COUNTY

ENGINEERING DIVISION _____ (954) 357-6230/357-6233
 TRAFFIC ENGINEERING DIVISION _____ (954) 487-2600

2. NO TRENCHES OR HOLES NEAR WALKWAYS, IN ROADWAYS OR THEIR SHOULDERS ARE TO BE LEFT OPEN OVERNIGHT WITHOUT THE WRITTEN PERMISSION OF THE CITY OF HOLLYWOOD ENGINEER.
3. THE CITY OF HOLLYWOOD HAS A NOISE ORDINANCE (CHAPTER 100) WHICH PROHIBITS EXCAVATION & CONSTRUCTION BEFORE 7:00 A.M. AND AFTER 6:00 P.M., MONDAY THRU FRIDAY. WORK IS ALLOWED 8:00 A.M. TO 6:00 P.M. ON SATURDAYS. NO WORK IS ALLOWED ON SUNDAYS NOR HOLIDAYS.
4. THE LOCATION, SIZE AND MATERIAL OF THE EXISTING UTILITIES AND STRUCTURES HAVE BEEN RECORDED FROM THE MOST RELIABLE INFORMATION AVAILABLE TO THE ENGINEER. THIS INFORMATION IS NOT GUARANTEED. ADDITIONAL UTILITIES MAY EXIST WHICH ARE NOT SHOWN ON THESE PLANS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR LOCATING AND VERIFYING ALL UTILITIES PRIOR TO BEGINNING CONSTRUCTION. ANY AND ALL CONFLICTS WITH EXISTING UTILITIES SHALL BE REPORTED TO THE CITY OF HOLLYWOOD DEPARTMENT OF PUBLIC UTILITIES. THIS WORK BY THE CONTRACTOR SHALL BE CONSIDERED INCIDENTAL TO THE CONTRACT AND NO ADDITIONAL COMPENSATION SHALL BE ALLOWED.
5. CONTRACTOR SHALL REPLACE IN KIND ALL ITEMS DAMAGED BY THEIR OPERATIONS.
6. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO VISIT JOB SITE(S) PRIOR TO BIDDING.

Jose D. Garcia State of Florida Professional Engineer, License No. 78456
 This item has been digitally signed and sealed by:

Printed copies of this document are not considered signed and sealed, and the signature must be verified on any electronic

PROJECT LOCATION (TYP.)

— PROPOSED IN-FILL SIDEWALK AREA

— All Other Alleys

— All Other Streets

0 1000 2000
SCALE IN FEET

NO.	DATE	DESCRIPTION	REVISIONS

City of Hollywood, Florida
 Department of
 Development Services
 Engineering/Transportation & Mobility Division

SCALE SEE PLAN
 DESIGNED
 DRAWN
 ISSUE DATE
 N/A

**BOULEVARD HEIGHTS IN-FILL
 SIDEWALK PROJECT
 PRE-CONSTRUCTION PLAN**

SHEET
CVR
 1 OF 3


EN 26-003 - 2026

GENERAL NOTES. SIDEWALK CONSTRUCTION

1. NEW SIDEWALK INSTALLED TOTAL: 28.444 LF
2. ALL SIDEWALK CONSTRUCTION SHALL FOLLOW COH SIDEWALK STANDARD DETAILS AND 50' BOULEVARD HEIGHTS TYPICAL CROSS SECTION.
3. CONCRETE TO BE CLASS 1, 3,000 PSI.
4. USE OF FIBER REINFORCED CEMENT IS PROHIBITED.
5. CONCRETE SIDEWALK WILL BE 4" THICK MINIMUM (TYP.), 6" THICK AT DRIVEWAYS, EXTENDED TWO FEET BEYOND DRIVE, ON BOTH SIDES.
6. SIDEWALK CONCRETE FINISH: LIGHT BROOM FINISH PERPENDICULAR TO THE DIRECTION OF SIDEWALK.
7. ALL SIDEWALK CONSTRUCTION SHALL BE IN STRICT ACCORDANCE WITH THE CONTRACT SPECIFICATIONS.
8. SIDEWALK SLOPES SHALL MEET THE REQUIREMENTS OF THE AMERICAN WITH DISABILITIES ACT.
9. CONSTRUCTION EXPANSION JOINTS AT SPACING SHOWN IN THE SIDEWALK DETAILS: AT POINT OF CURVATURE, AT ADJOINING STRUCTURES, AT THE END OF DAYS WORK, AND WHERE NEW SIDEWALK MEETS EXISTING SIDEWALK.
10. PEDESTRIAN PATHWAYS WITH RUNNING SLOPES STEEPER THAN 20:1 ARE CONSIDERED RAMPS. RAMPS RUNNING SLOPES SHALL NOT EXCEED 12:1. RAMP CROSS SLOPES SHALL NOT EXCEED 0.02
11. ELEVATION OF THE BACK OF NEW CONCRETE SIDEWALK TO BE A MIN. OF 0.1 FT ABOVE CROWN OF ROAD.




PROP. 5 FT WIDE AND 4" THICK CONCRETE SIDEWALK (6" THICK AT DRIVEWAYS), USE OF FIBER REINFORCED CEMENT PROHIBITED, CONCRETE TO BE CLASS 1, 3,000 PSI ON COMPACTED LBR 40 SUBGRADE. REFER TO STANDARD DETAILS ON SHEET PM-3 (TYP.)



PRE-CONSTRUCTION SITE PLAN OVERVIEW
SCALE 1:500

NO.	DATE	REVISIONS

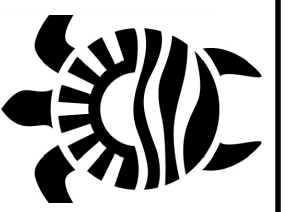


City of Hollywood, Florida
Department of
Development Services
Engineering/Transportation & Mobility Division

SCALE	SEE PLAN
DESIGNED	
DRAWN	
ISSUE DATE	N/A

**BOULEVARD HEIGHTS IN-FILL
SIDEWALK PROJECT
PRE-CONSTRUCTION PLAN**


SHEET
PM-2
2 OF 3

SEAL

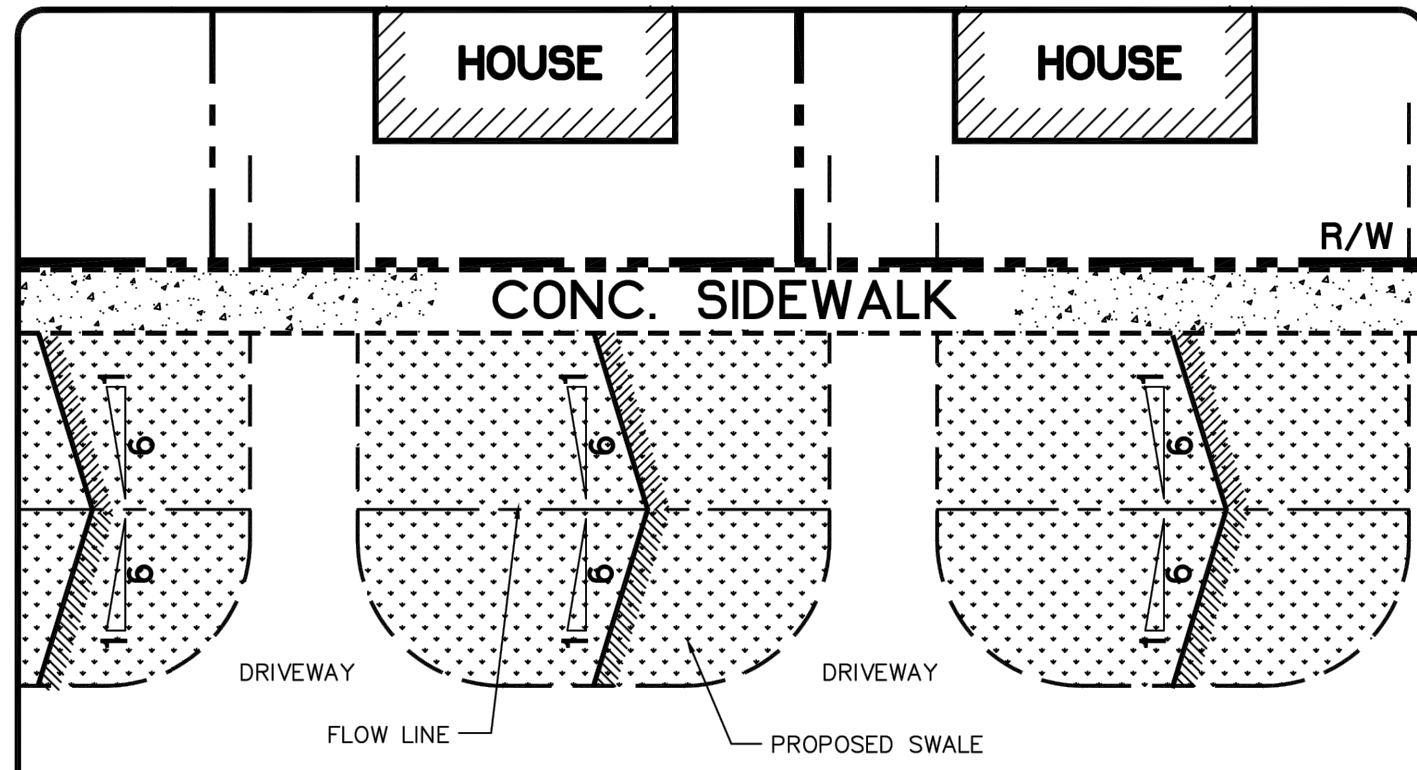


PLAN SWALE

NOTES:
 1. HORIZONTAL BOTTOM (FLOW LINE) OF SWALE LOCATION IS TO BE PLACED AT THE POINT WHERE 6:1 SLOPE FROM THE EDGE OF S/W AND AN 6:1 SLOPE FROM EDGE OF PAVEMENT MEET.
 2. TOP OF SOD ELEVATION AS SHOWN ON BELOW.

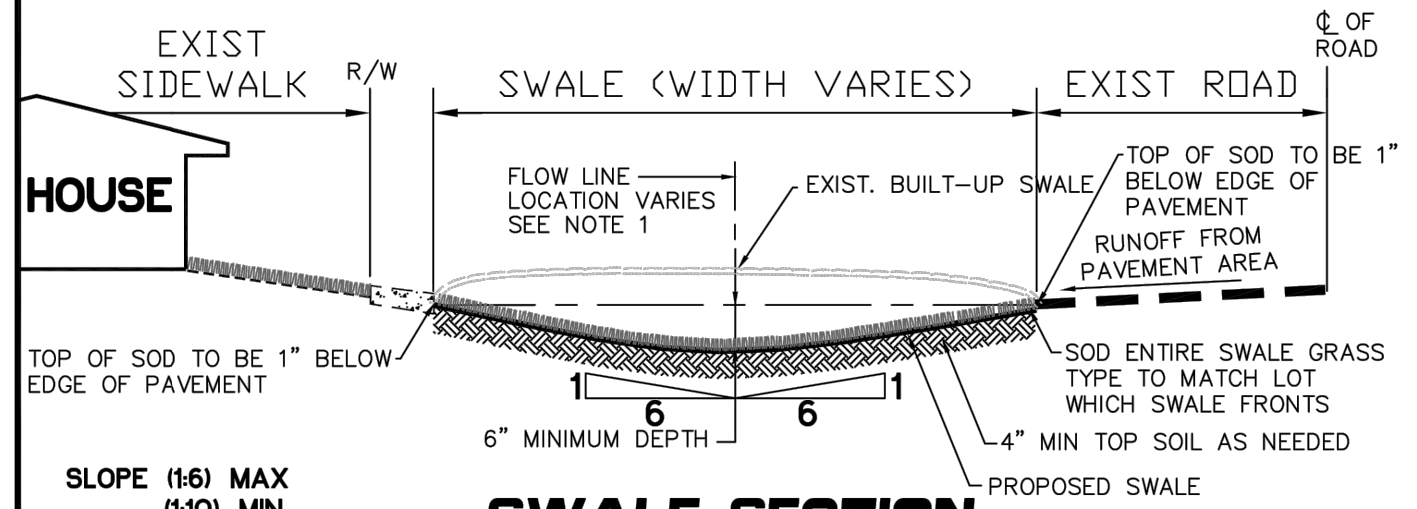


SWALE SECTION


DESIGNER: J.V. DRAWN BY: R.A.Q. CHECKED BY: R.A.Q. DATE: 05/20/2010	ENGINEERING SUPPORT SERVICES PUBLIC UTILITIES DEPARTMENT CITY OF HOLLYWOOD, FLORIDA	SWALE CUT DETAIL SHEET 1 OF 1
--	---	---

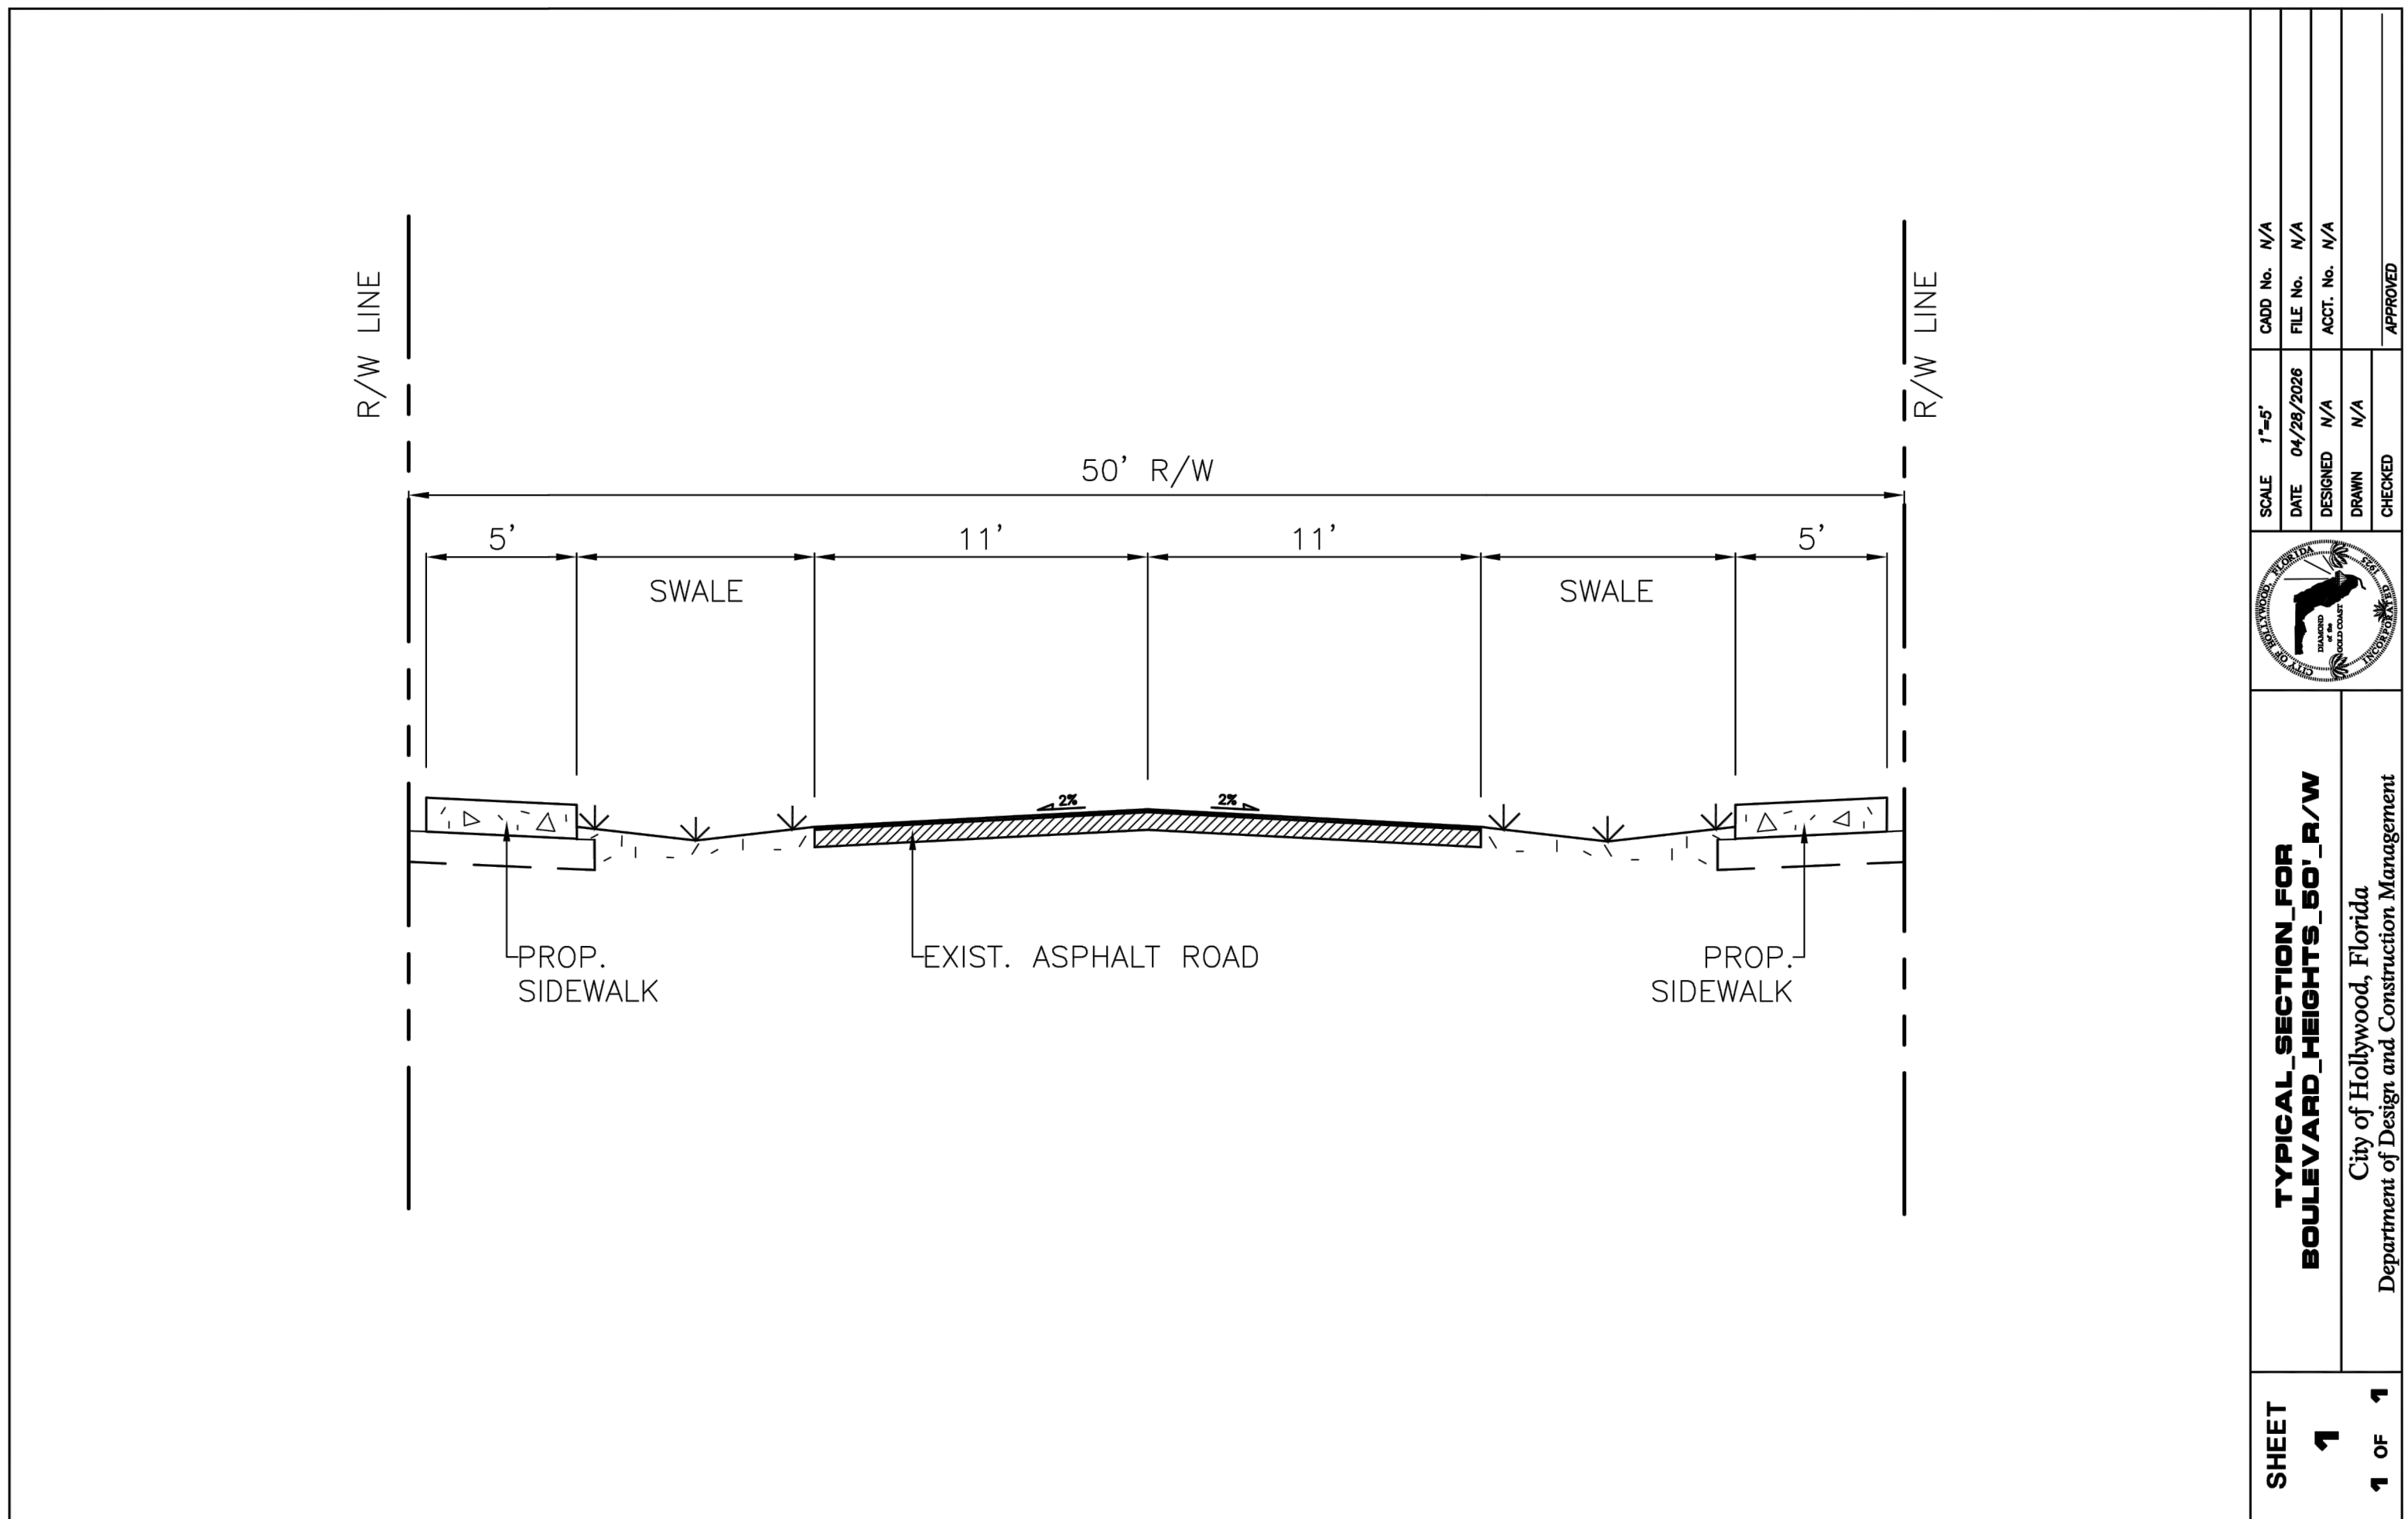


SCALE: 1"=8' DATE: 04/28/2028 DESIGNED: N/A DRAWN: N/A CHECKED: N/A APPROVED: N/A	TYPICAL SECTION FOR BOULEVARD HEIGHTS_60'_R/W City of Hollywood, Florida Department of Design and Construction Management	SHEET 1 OF 1
--	--	--------------

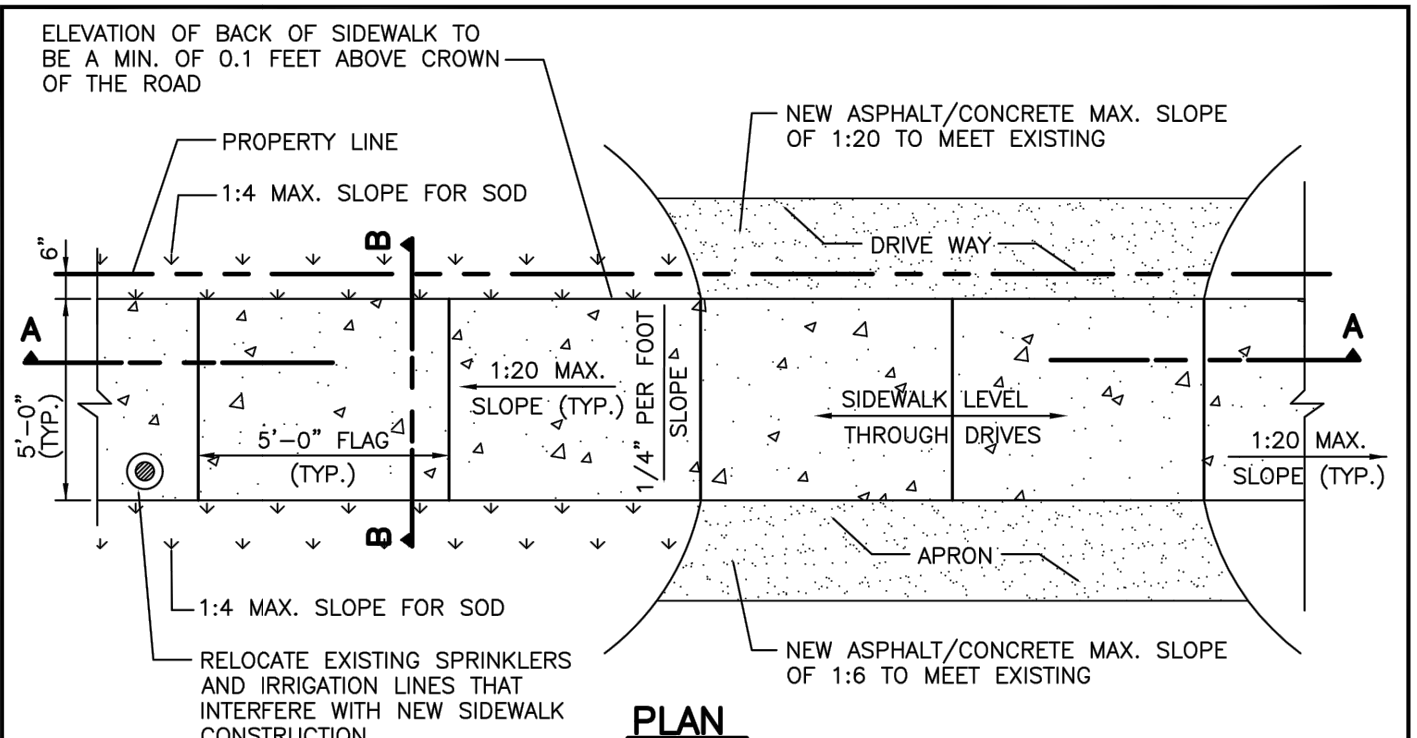

PLAN

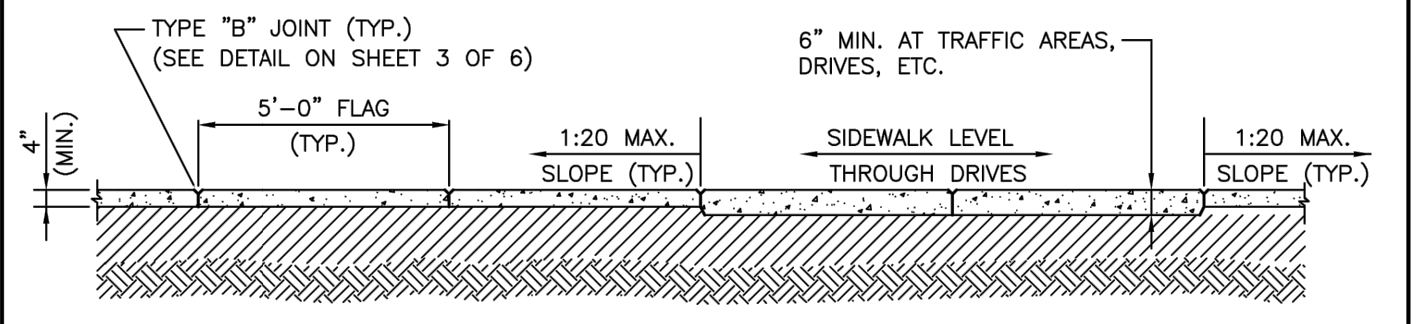


SECTION A-A

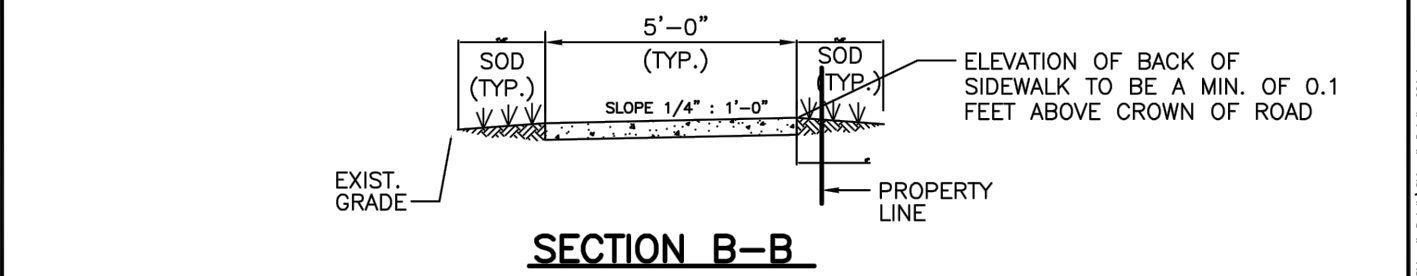

SECTION B-B


NOTE:
 ALL SIDEWALK CONSTRUCTION SHALL BE IN STRICT ACCORDANCE WITH THE CONTRACT SPECIFICATIONS.
 LIGHT BROOM FINISH PERPENDICULAR TO THE DIRECTION OF THE SIDEWALK.

CITY OF HOLLYWOOD, FLORIDA DEPARTMENT OF DEVELOPMENT SERVICES ENGINEERING TRANSPORTATION AND MOBILITY DIVISION	DESIGNED BY: J.V. DRAWN BY: R.A.Q. CHECKED BY: R.A.Q. DATE: 05/20/2010	SCALE: N.T.S. PROJECT No.: ACCT. No.: CADD.DWG No.: DATE: 05/20/2010	APPROVED BY: CITY ENGINEER SHEET No.: 1 OF 4 SHEETS
---	---	--	---

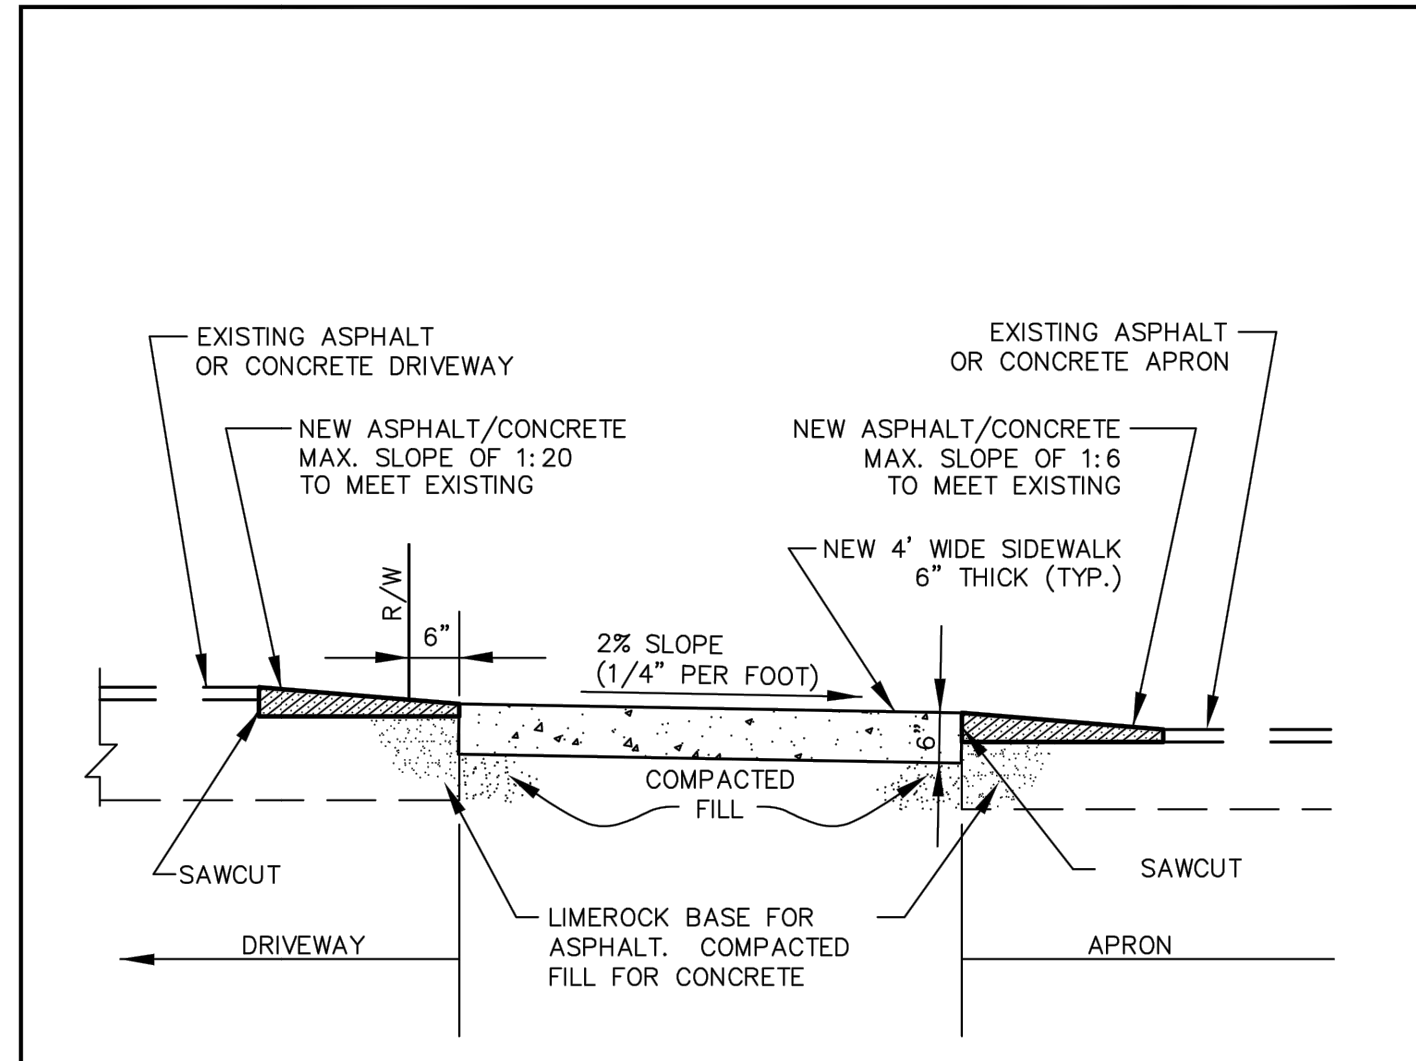


SECTIONAL VIEW AT DRIVES

CITY OF HOLLYWOOD, FLORIDA DEPARTMENT OF DEVELOPMENT SERVICES ENGINEERING TRANSPORTATION AND MOBILITY DIVISION	DESIGNED BY: J.V. DRAWN BY: R.A.Q. CHECKED BY: R.A.Q. DATE: 05/20/2010	SCALE: N.T.S. PROJECT No.: ACCT. No.: CADD.DWG No.: DATE: 05/20/2010	APPROVED BY: CITY ENGINEER SHEET No.: 2 OF 4 SHEETS
---	---	--	---

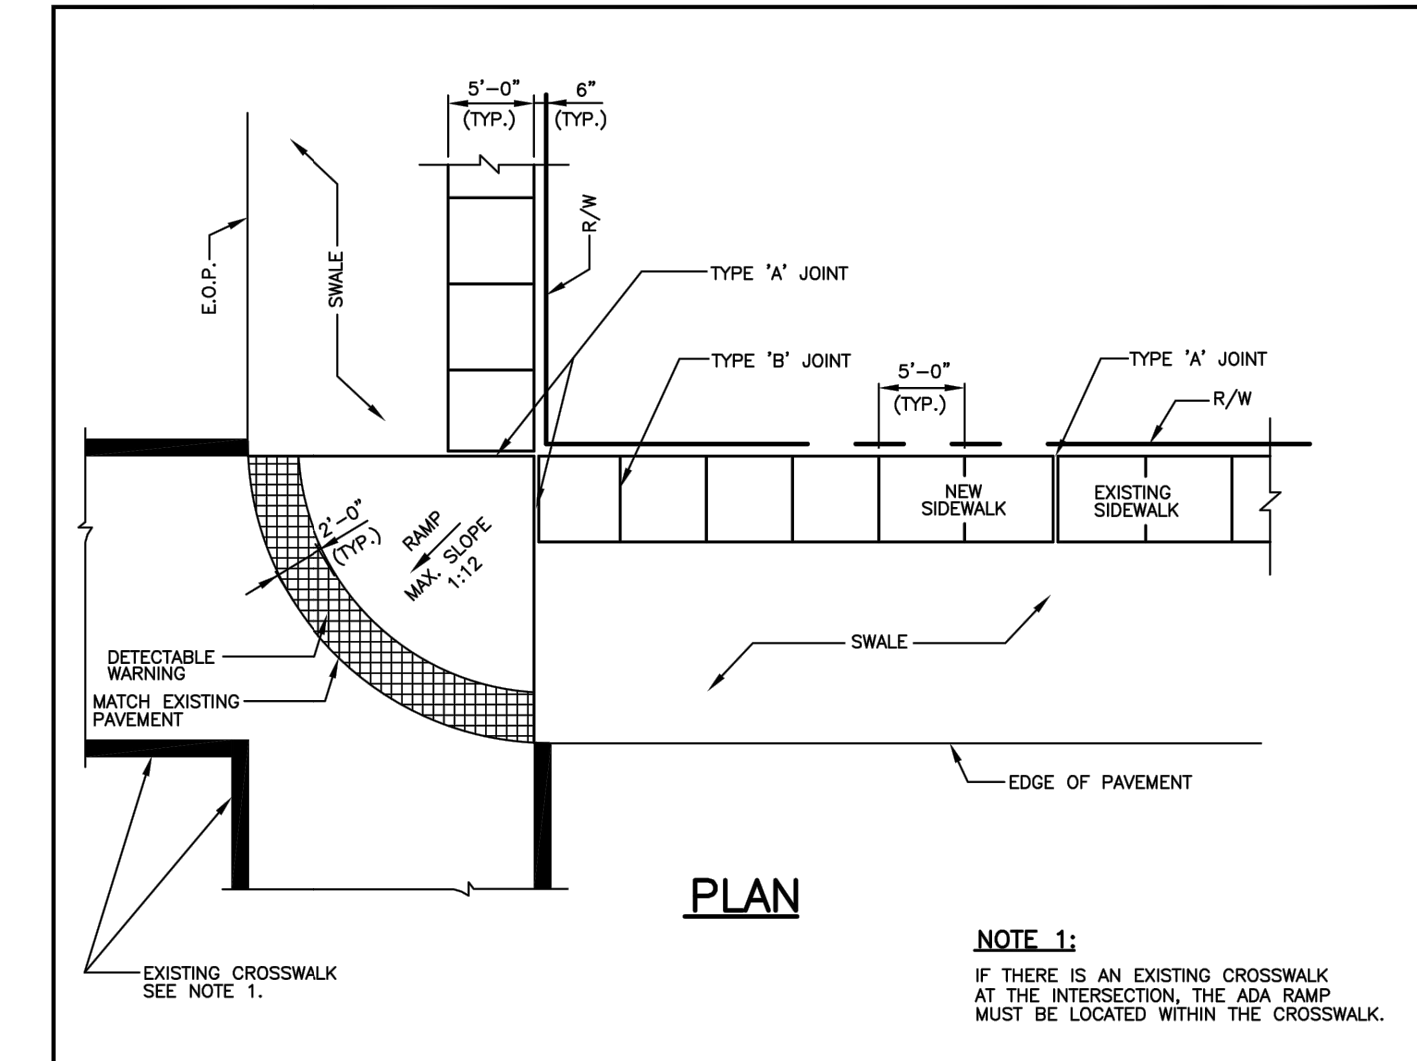

PLAN


NOTE 1:
 IF THERE IS AN EXISTING CROSSWALK AT THE INTERSECTION, THE ADA RAMP MUST BE LOCATED WITHIN THE CROSSWALK.

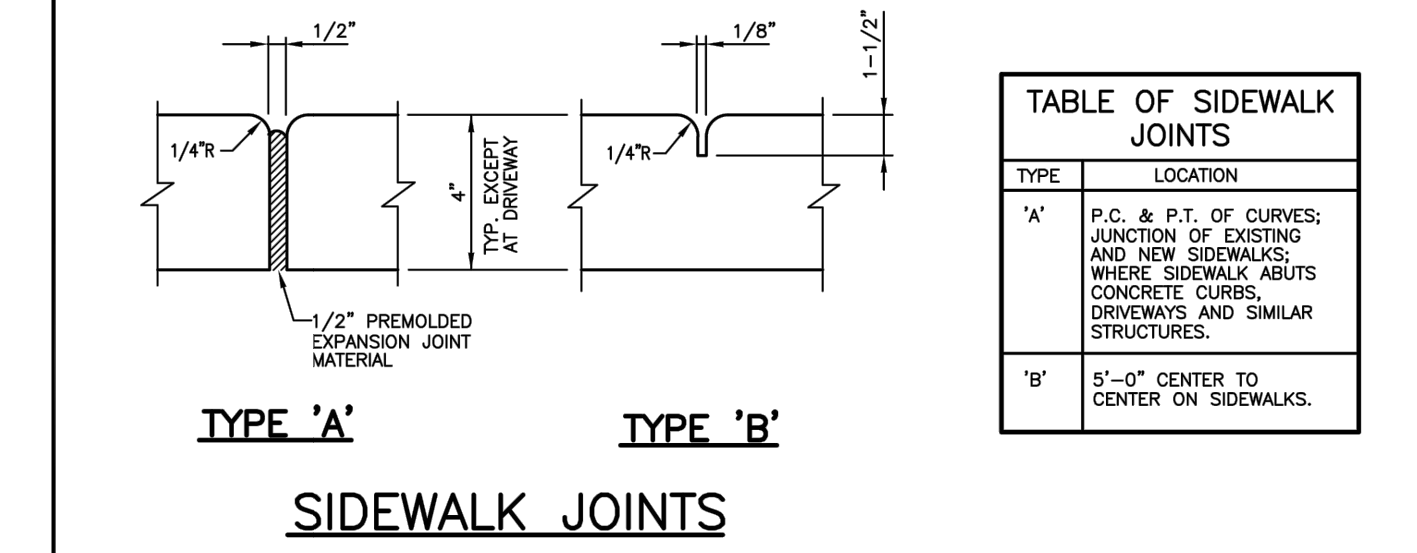


SIDEWALK JOINTS

TYPE	LOCATION
'A'	P.C. & P.T. OF CURVES; JUNCTION OF EXISTING AND NEW SIDEWALKS; WHERE SIDEWALK ABUTS CONCRETE CURBS, DRIVEWAYS AND SIMILAR STRUCTURES.
'B'	5'-0" CENTER TO CENTER ON SIDEWALKS.


CITY OF HOLLYWOOD, FLORIDA DEPARTMENT OF DEVELOPMENT SERVICES ENGINEERING TRANSPORTATION AND MOBILITY DIVISION	DESIGNED BY: J.V. DRAWN BY: R.A.Q. CHECKED BY: R.A.Q. DATE: 05/20/2010	SCALE: N.T.S. PROJECT No.: ACCT. No.: CADD.DWG No.: DATE: 05/20/2010	APPROVED BY: CITY ENGINEER SHEET No.: 3 OF 4 SHEETS
---	---	--	---

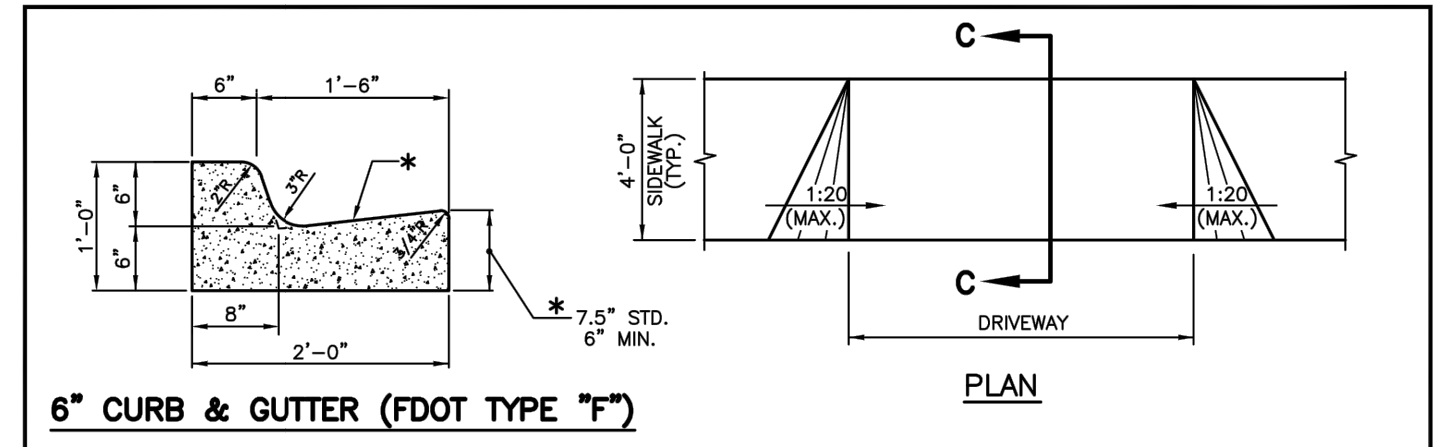

6" CURB & GUTTER (FDOT TYPE "F")

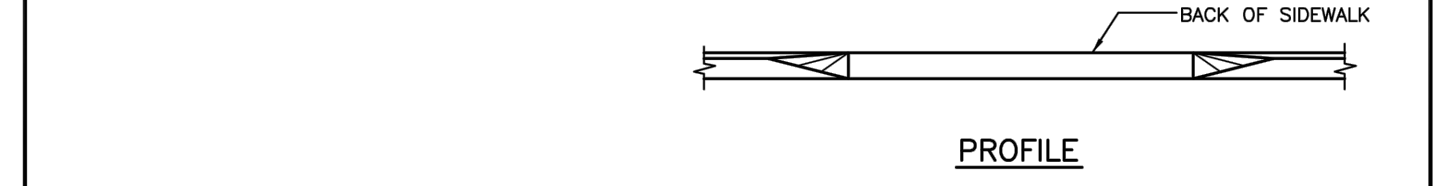


PROFILE

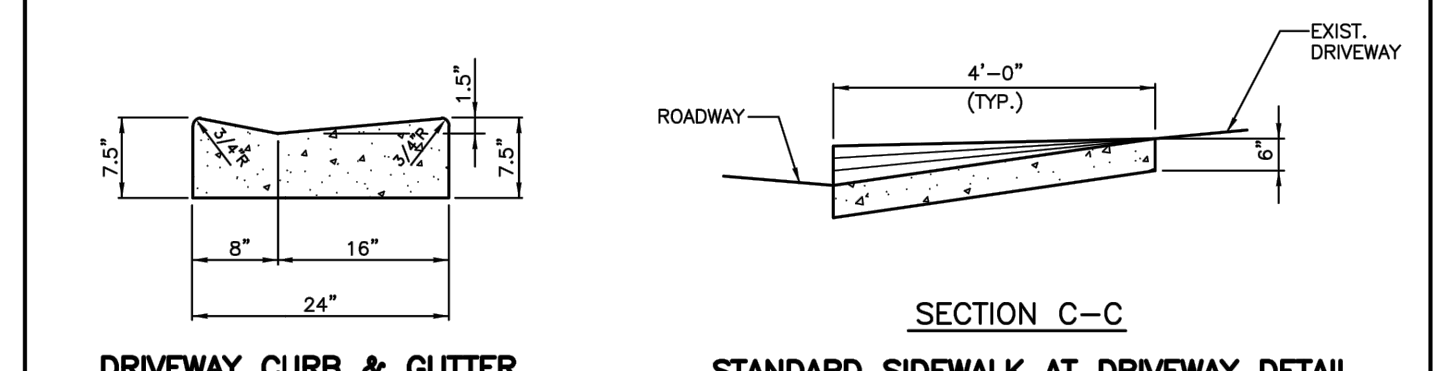


DRIVEWAY CURB & GUTTER

STANDARD SIDEWALK AT DRIVEWAY DETAIL

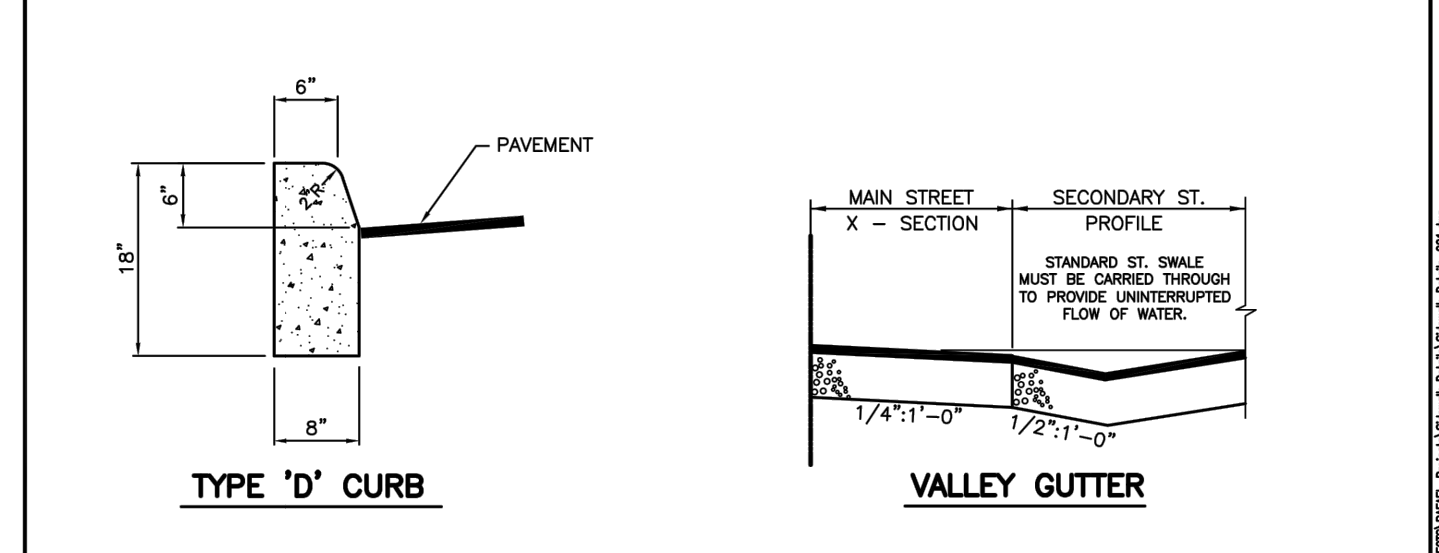

TYPE "D" CURB

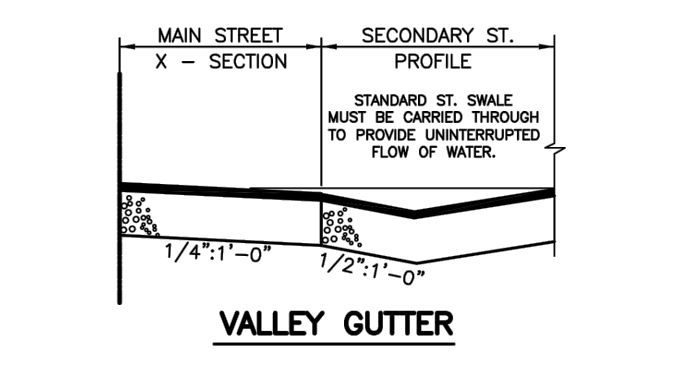

VALLEY GUTTER

* WHEN USED ON HIGH SIDE OF ROADWAYS, THE CROSS SLOPE OF THE GUTTER SHALL MATCH THE CROSS SLOPE OF THE ADJACENT PAVEMENT. THE THICKNESS OF THE UP SHALL BE 6", UNLESS OTHERWISE SHOWN ON PLANS.

CITY OF HOLLYWOOD, FLORIDA DEPARTMENT OF DEVELOPMENT SERVICES ENGINEERING TRANSPORTATION AND MOBILITY DIVISION	DESIGNED BY: J.V. DRAWN BY: R.A.Q. CHECKED BY: R.A.Q. DATE: 05/20/2010	SCALE: N.T.S. PROJECT No.: ACCT. No.: CADD.DWG No.: DATE: 05/20/2010	APPROVED BY: CITY ENGINEER SHEET No.: 4 OF 4 SHEETS
---	---	--	---

BCTED Ref. No. SEAL



City of Hollywood, Florida
 Department of
 Development Services
 Engineering/Transportation & Mobility Division

SCALE: SEE PLAN	DESIGNED: N/A
DRAWN: N/A	ISSUE DATE: N/A

**BOULEVARD HEIGHTS IN-FILL
SIDEWALK CURBS
SECTION DETAILS**

SHEET PM-3
 3 OF 3